




INEX 3048 and 3048R



INEX Model 3048R

*Simple, Reliable,
Industrial Construction
& Features*

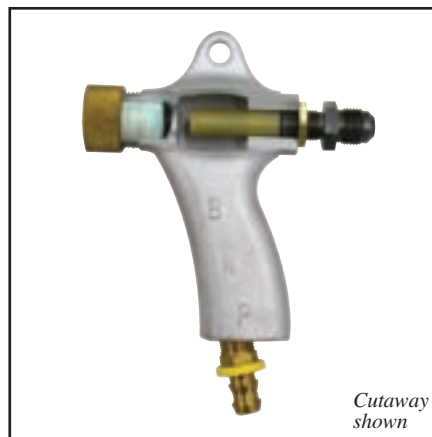

*Cutaway
shown*

BNP BLAST GUN

The BNP Blast Gun sets the industry standards for performance, versatility, and durability. The pistol-grip design reduces operator fatigue and increases productivity.

S P E C I F I C A T I O N S

INEX 3048R COMPLETE SYSTEM



INEX 3048R with 300cfm double-walled dust bag

CABINET


Working Chamber Size

45-3/4" wide (1162 mm)
27-3/4" deep (704 mm)
28" high (711 mm)

Window Size (safety glass)

19-1/2" wide (495 mm)
12-1/2" high (317 mm)

Door Opening



DUST COLLECTORS



INEX 3048 comes with vacuum collector.

INEX 3048R with reclaimer offers a choice of dust collection systems. Select 300 cfm double-walled dust bag with zippered clean-out; or optional 300 cfm dry filter, with 15 tubular cotton-sateen tubes.

Optional dry filter provides 75ft² filter area.




300 cfm Dry Filter

INEX 3048R MEDIA RECLAIMER

The Heart of the INEX Blasting System

The heart of the INEX 3048R system, our exclusive media reclaimer, efficiently separates dust and debris from reusable media. The removable debris screen captures over-size foreign materials. The optional externally adjustable vortex tube effectively separates dust from fine, lightweight media. The INEX's reclaimer handles all nonmetallic blast media with ease.

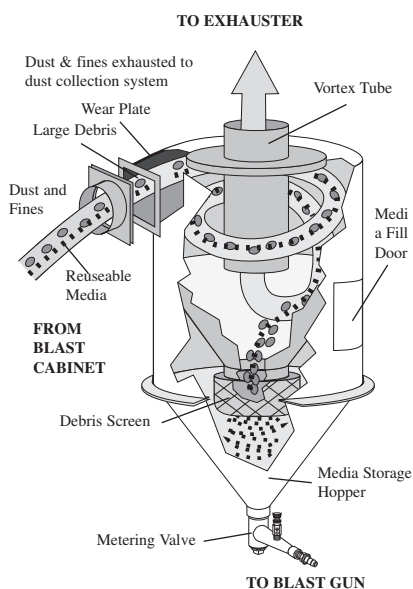

Electrical

300 cfm (8,5 m³/m) 1/2HP, 115V, 1PH, 60Hz, .37KW, 220V, 1PH, 50Hz

BNP BLAST GUN

AIR REQUIREMENTS FOR NOZZLES

BNP GUN	NOZZLE ORIFICE	AIR JET	cfm at 80 psi	M ³ /Min at 5,5 BAR	RECLAIMER
No. 4	5/16"	1/8"	21	0,60	300 cfm (8,5 m ³ /m)
No. 5	5/16"	5/32"	32	0,90	300 cfm (8,5 m ³ /m)

INEX cabinet furnished with a No. 5 BNP gun.

ORDERING INFORMATION

Model	Reclaim cfm	Dust Collection	Stock Number	Ship Weight lb (kg)
INEX 3048	n/a	Vacuum Collector	14425	439 (200)
INEX 3048R	300 cfm	Dust Bag	20261	583 (265)
Optional Accessory				
Dry Filter		300 cfm	12699	209 (95)

Distributed by:

ISO 9001:2008 certified. Clemco is committed to continuous product improvement. Specifications are subject to change without notice.

© 2012 Clemco Industries Corp • Washington, MO 63090
636 239-4300 • FAX 800 726-7559 • www.clemcoindustries.com
Stock No.: 22847 • Job No.: 2098-0200, Rev. E, 02/12