


SOLENOID VALVES

TYPE T AND TYPE U SOLENOID VALVES USE THE SAME BODY AS THE TYPE P REGULATORS. TYPE U SIZE 9/16" THRU 8" IS PILOT OPERATED WITH SPRING RETURN. TYPE T HAS TWO CONTROL SOLENOIDS, ONE TO OPEN AND ONE TO CLOSE THE VALVE. IT IS CONDENSER GAS POWERED. USUALLY, THEY HAVE A TYPE F STRAINER CLOSE COUPLED.

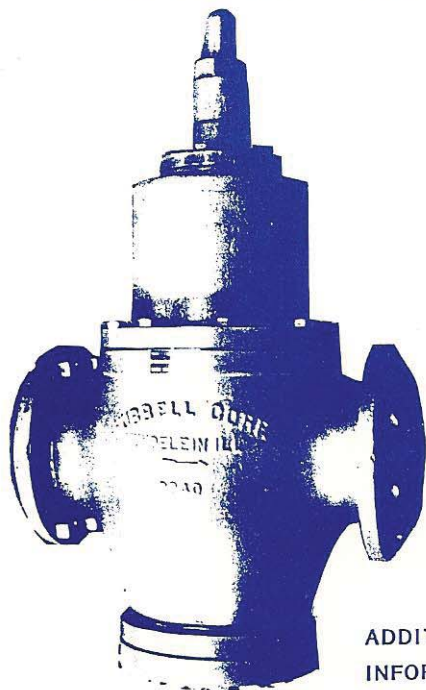


5" T OR U

type T


Port Size	BASIC CAT NO	Flange Size**
*3/4	T0752	3/4, 1/2, 1
3/4	T0754	3/4, 1/2, 1
*1	T1002	1, 3/4
1	T1004	1
1-1/4	T1254	1-1/4
1-1/2	T1504	1-1/2
2	T2004	2
2-1/2	T2504	2-1/2
3	T3004	3
4	T4004	4
5	T5008	5
6	T6008	6
8	T8000	8

* 2 bolt (oval) flange construction.

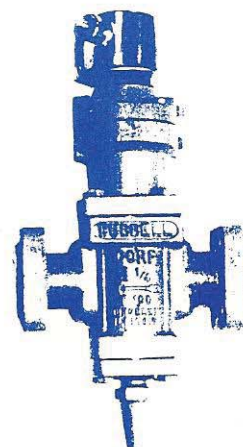

1-1/4" U

ADDITIONAL PREFIX AND SUFFIX NUMBERS AND LETTERS GIVE MORE INFORMATION. FOR EXAMPLE "F" AFTER THE BASIC CATALOGUE NUMBER INDICATES A STRAINER IS ATTACHED.

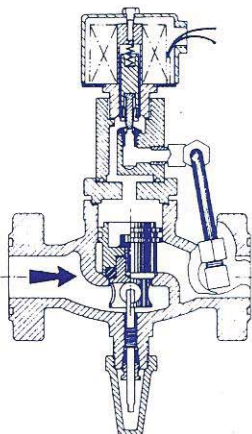

TYPE "FS"

Port Size	BASIC CAT NO
*1	FS1002
1	FS1004
1-1/4	FS1254
1-1/2	FS1504
2	FS2004
2-1/2	FS2504
3	FS3004
4	FS4004
5	FS5008
6	FS6008
8	FS8000

type U

Port Size	BASIC CAT NO	Flange Size**
*9/16	U0502	1/2, 3/4, 1
9/16	U0504	1/2, 3/4, 1
*3/4	U0752	3/4, 1/2, 1
3/4	U0754	3/4, 1/2, 1
*1	U1002	1, 3/4
1	U1004	1
1-1/4	U1254	1-1/4
1-1/2	U1504	1-1/2
2	U2004	2
2-1/2	U2504	2-1/2
3	U3004	3
4	U4004	4
5	U5008	5
6	U6008	6
8	U8000	8

TYPE FS AVAILABLE SIZES 1" THRU 8" OPERATES ON SYSTEM PRESSURE. THE BODY CASTINGS ARE THE SAME AS THE TYPE S SOLENOIDS AND G AND R CHECK VALVES.