



Air Conditioning & Heating

GSZC18

COOLING CAPACITY: 34,000 - 56,500 BTU/H
HEATING CAPACITY: 34,600 - 59,500 BTU/H

*SPLIT SYSTEM HEAT PUMP
UP TO 19 SEER & 10 HSPF*



ComfortNet®

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
Expanded Heating Data.....	16
AHRI Ratings.....	18
Wiring Diagram.....	23
Dimensions.....	24
Accessories.....	24

Standard Features

- High-efficiency two-stage scroll compressor
- High-density foam compressor sound blanket
- ComfortNet® Communications System compatible
- Expanded ComfortAlert diagnostics built in
- Set-up capable with two low-voltage wires to outdoor unit
- Diagnostic indicator lights and storage of six fault codes
- Color-coded terminal strip for non-communicating set-up
- SmartShift® technology with short-cycle protection to ensure quiet, reliable defrost
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- Factory-installed coil and ambient temperature sensors
- High- and low-pressure switches
- Quiet ECM-style condenser fan motor
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman® brand sound control top design
- Heavy-gauge galvanized-steel cabinet
- Appliance-quality powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder paint finish
- Top and side maintenance access
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)






Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov.



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home), 10-Year Compressor Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

	G	S	Z	C	18	036	1	AA	
	1	2	3	4	5,6	7,8,9	10	11,12	
Brand	G Goodman® Brand High Feature Set								Engineering * Major/ Minor Revisions * Not used for order or inventory control
Product Category	S Split System								Electrical 1 - 208/230 V, 1 Phase, 60 Hz
Unit Type	X Condenser R-410A Z Heat Pump R-410A								Nominal Capacity 024 2 Tons 048 4 Tons 036 3 Tons 060 5 Tons
Communication Feature	C ComfortNet 4-wire communications ready								Efficiency 16 16 SEER 18 18 SEER 20 20 SEER

	GSZC18 0361C	GSZC18 0481C	GSZC18 0601C
COOLING CAPACITY			
Nominal Cooling (BTU/h)	34,800	49,500	56,500
Nominal Heating (BTU/h)	35,000	51,000	59,500
Decibels	72	75	75
COMPRESSOR			
RLA	14.8	20.4	22.9
LRA	84.22	122.1	147.2
CONDENSER FAN MOTOR			
Horsepower (RPM)	1/3	1/3	1/3
FLA	2.8	2.8	2.8
REFRIGERATION SYSTEM			
Refrigerant Line Size ¹			
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	1 1/8"	1 1/8"
Refrigerant Connection Size			
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	1 1/8"	1 1/8"
Valve Connection Type	Sweat	Sweat	Sweat
Refrigerant Charge	219	308	288
Expansion Device	TXV	TXV	TXV
Superheat at Service Valve	7-9°F	7-9°F	7-9°F
Subcooling at Service Valve			
High Stage	8-10°F	8-10°F	8-10°F
Low Stage	5-7°F	5-7°F	5-7°F
ELECTRICAL DATA			
Voltage-Phase-Hz	208/230-1-60	208/230-1-60	208/230-1-60
Minimum Circuit Ampacity ²	21.3	28.3	31.4
Max. Overcurrent Protection ³	35	45	50
Min / Max Volts	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
UNIT WEIGHTS			
Equipment Weight (lbs.)	260	316	319
Ship Weight (lbs)	280	336	339
ENERGY STAR CERTIFIED [^]			
			

[^] Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet ENERGY STAR requirements. See Page 18 for all ENERGY STAR-certified combinations as of this document's revision date.

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil.
THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT, NOT THE INDOOR COIL.

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	25.7	26.1	26.9	-	25.5	25.9	26.6	-	24.8	25.2	26.0	-	23.7	24.0	24.8	-	22.2	22.6	23.4	-	21.0	21.3	22.1	-
	S/T	0.59	0.51	0.37	-	0.60	0.52	0.38	-	0.62	0.54	0.40	-	1.00	0.56	0.42	-	1.00	0.59	0.45	-	1.00	0.64	0.50	-
	ΔT	22	20	16	-	22	20	16	-	22	20	17	-	22	20	16	-	22	20	16	-	23	21	17	-
	KW	1.24	1.24	1.23	-	1.42	1.42	1.41	-	1.62	1.61	1.61	-	1.83	1.83	1.83	-	2.07	2.07	2.07	-	2.35	2.35	2.35	-
	Amps	5.3	5.3	5.3	-	6.1	6.1	6.1	-	7.0	7.0	7.0	-	8.0	8.0	8.0	-	9.1	9.1	9.1	-	10.4	10.4	10.3	-
	Hi PR	221	222	223	-	256	257	258	-	292	293	295	-	332	333	334	-	374	375	377	-	420	421	422	-
Lo PR	126	127	130	-	133	135	138	-	140	142	145	-	146	147	151	-	151	153	156	-	158	160	163	-	
70	MBh	26.2	26.6	27.3	-	26.0	26.3	27.1	-	25.3	25.7	26.4	-	24.1	24.5	25.3	-	22.7	23.1	23.8	-	21.4	21.8	22.6	-
	S/T	0.69	0.61	0.47	-	0.69	0.61	0.47	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.73	0.60	-
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	20	18	14	-	21	19	15	-
	KW	1.25	1.25	1.25	-	1.43	1.43	1.43	-	1.63	1.63	1.62	-	1.84	1.84	1.84	-	2.08	2.08	2.08	-	2.36	2.36	2.36	-
	Amps	5.3	5.3	5.3	-	6.2	6.2	6.1	-	7.1	7.1	7.0	-	8.0	8.0	8.0	-	9.1	9.1	9.1	-	10.4	10.4	10.4	-
	Hi PR	223	224	226	-	258	259	261	-	295	296	298	-	334	335	337	-	377	378	379	-	422	423	425	-
Lo PR	128	130	133	-	136	138	141	-	143	144	147	-	148	150	153	-	154	156	159	-	161	163	166	-	
900	MBh	26.4	26.7	27.5	-	26.2	26.5	27.3	-	25.5	25.8	26.6	-	24.3	24.7	25.5	-	22.9	23.3	24.0	-	21.6	22.0	22.7	-
	S/T	0.70	0.63	0.49	-	0.71	0.63	0.49	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	1.00	0.61	-
	ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-
	KW	1.26	1.26	1.25	-	1.43	1.43	1.43	-	1.63	1.63	1.63	-	1.85	1.85	1.84	-	2.09	2.09	2.08	-	2.37	2.37	2.36	-
	Amps	5.4	5.4	5.3	-	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.1	8.0	-	9.2	9.2	9.1	-	10.4	10.4	10.4	-
	Hi PR	224	225	227	-	259	260	262	-	296	297	298	-	335	336	338	-	378	379	380	-	423	424	426	-
Lo PR	129	131	134	-	137	138	142	-	144	145	148	-	149	151	154	-	155	156	160	-	162	163	167	-	

700	MBh	25.8	26.1	26.9	28.1	25.5	25.9	26.7	27.8	24.8	25.2	26.0	27.2	23.7	24.0	24.8	26.0	22.3	22.6	23.4	24.6	21.0	21.3	22.1	23.3
	S/T	0.72	0.64	0.50	0.4	1.00	0.65	0.51	0.4	1.00	0.68	0.54	0.4	1.00	0.70	0.56	0.4	1.00	0.72	0.58	0.4	1.00	1.00	0.63	0.5
	ΔT	26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	20	17	27	25	22	17.8
	KW	1.24	1.24	1.23	1.2	1.42	1.41	1.41	1.4	1.61	1.61	1.61	1.6	1.83	1.83	1.82	1.8	2.07	2.07	2.06	2.1	2.35	2.35	2.35	2.4
	Amps	5.3	5.3	5.3	5.3	6.1	6.1	6.1	6.1	7.0	7.0	7.0	7.0	8.0	8.0	8.0	8.0	9.1	9.1	9.1	9.1	10.4	10.4	10.3	10.4
	Hi PR	221	222	223	227	256	257	258	262	292	293	295	299	332	333	334	338	374	375	377	381	420	421	422	426
Lo PR	126	127	130	136	133	135	138	144	140	142	145	150	146	147	151	156	151	153	156	162	158	160	163	169	
75	MBh	26.2	26.6	27.4	28.5	26.0	26.3	27.1	28.3	25.3	25.7	26.4	27.6	24.1	24.5	25.3	26.5	22.7	23.1	23.9	25.0	21.4	21.8	22.6	23.7
	S/T	0.82	0.74	0.60	0.5	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.73	0.6
	ΔT	25	23	19	15	25	23	19	15	25	23	19	15	25	23	19	15	24	22	19	15	26	24	20	16.0
	KW	1.25	1.25	1.25	1.3	1.43	1.43	1.43	1.4	1.63	1.63	1.62	1.6	1.84	1.84	1.84	1.9	2.08	2.08	2.08	2.1	2.36	2.36	2.36	2.4
	Amps	5.3	5.3	5.3	5.4	6.2	6.1	6.1	6.2	7.1	7.1	7.0	7.1	8.0	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.4	10.4	10.4	10.5
	Hi PR	224	225	226	230	259	260	261	265	295	296	298	302	335	336	337	341	377	378	380	384	423	423	425	429
Lo PR	128	130	133	138	136	138	141	146	143	144	148	153	148	150	153	159	154	156	159	164	161	163	166	171	
900	MBh	26.4	26.8	27.5	28.7	26.2	26.5	27.3	28.5	25.5	25.9	26.6	27.8	24.3	24.7	25.5	26.6	22.9	23.3	24.0	25.2	21.6	22.0	22.8	23.9
	S/T	0.84	0.76	0.62	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	0.81	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.75	0.6
	ΔT	24	22	18	15	24	22	18	15	24	22	19	15	24	22	18	15	24	22	18	14	25	23	19	15.5
	KW	1.26	1.25	1.25	1.3	1.43	1.43	1.43	1.4	1.63	1.63	1.63	1.6	1.85	1.84	1.84	1.9	2.09	2.08	2.08	2.1	2.37	2.37	2.36	2.4
	Amps	5.4	5.4	5.3	5.4	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.1	8.1	8.0	8.1	9.2	9.2	9.1	9.2	10.4	10.4	10.4	10.5
	Hi PR	224	225	227	231	259	260	262	266	296	297	299	302	335	336	338	342	378	379	381	384	423	424	426	430
Lo PR	129	131	134	139	137	138	142	147	144	145	148	154	149	151	154	160	155	157	160	165	162	164	167	172	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												115°F
		65°F				75°F				85°F				95°F				105°F								
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
70	1050	MBh	35.4	35.9	36.9	-	35.0	35.5	36.6	-	34.1	34.6	35.7	-	32.5	33.0	34.1	-	30.6	31.1	32.1	-	28.8	29.3	30.4	-
		S/T	0.61	0.53	0.39	-	0.62	0.54	0.40	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.61	0.47	-	1.00	0.66	0.52	-
		ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-
		kW	1.77	1.76	1.76	-	1.99	1.98	1.98	-	2.23	2.23	2.23	-	2.50	2.50	2.49	-	2.80	2.79	2.79	-	3.14	3.14	3.14	-
	Amps	Hi PR	229	230	232	-	265	266	268	-	303	304	306	-	344	345	347	-	388	389	391	-	435	436	438	-
		Lo PR	120	122	125	-	128	129	132	-	134	136	139	-	139	141	144	-	145	146	149	-	151	153	156	-
		MBh	35.9	36.4	37.4	-	35.6	36.1	37.1	-	34.6	35.1	36.2	-	33.0	33.5	34.6	-	31.1	31.6	32.7	-	29.3	29.8	30.9	-
		S/T	0.68	0.60	0.46	-	0.69	0.61	0.47	-	0.71	0.63	0.49	-	0.73	0.65	0.51	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-
	1220	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	19	17	14	-
		kW	1.78	1.78	1.77	-	2.00	2.00	1.99	-	2.25	2.24	2.24	-	2.51	2.51	2.51	-	2.81	2.81	2.80	-	3.16	3.16	3.15	-
		Amps	7.1	7.1	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.2	-	10.4	10.4	10.4	-	11.8	11.8	11.8	-	13.4	13.4	13.4	-
		Hi PR	231	232	234	-	268	269	270	-	305	306	308	-	346	347	349	-	390	391	393	-	437	438	440	-
1350	Lo PR	122	124	127	-	130	131	134	-	136	138	141	-	141	143	146	-	147	148	151	-	153	155	158	-	
	MBh	36.3	36.8	37.9	-	36.0	36.5	37.6	-	35.1	35.6	36.7	-	33.5	34.0	35.1	-	31.6	32.1	33.1	-	29.8	30.3	31.3	-	
	S/T	0.71	0.63	0.49	-	0.72	0.64	0.50	-	0.74	0.66	0.53	-	0.76	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	
	ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	
1050	kW	1.79	1.79	1.78	-	2.01	2.01	2.00	-	2.25	2.25	2.25	-	2.52	2.52	2.51	-	2.82	2.82	2.81	-	3.17	3.16	3.16	-	
	Amps	7.1	7.1	7.1	-	8.1	8.1	8.1	-	9.3	9.3	9.2	-	10.5	10.5	10.5	-	11.8	11.8	11.8	-	13.4	13.4	13.4	-	
	Hi PR	233	234	236	-	269	270	272	-	307	308	310	-	348	349	351	-	392	393	395	-	439	440	442	-	
	Lo PR	124	125	128	-	131	133	136	-	138	139	142	-	143	145	148	-	148	150	153	-	155	157	160	-	
75	1050	MBh	35.4	35.9	36.9	38.6	35.1	35.6	36.6	38.2	34.1	34.6	35.7	37.3	32.5	33.0	34.1	35.7	30.6	31.1	32.2	33.8	28.8	29.3	30.4	32.0
		S/T	0.74	0.66	0.52	0.4	0.75	0.67	0.53	0.4	1.00	0.69	0.56	0.4	1.00	0.71	0.58	0.4	1.00	0.74	0.60	0.5	1.00	0.79	0.65	0.5
		ΔT	23	21	18	15	23	21	18	14	23	21	18	15	23	21	18	14	23	21	18	14	24	22	19	15.3
		kW	1.76	1.76	1.76	1.8	1.98	1.98	1.98	2.0	2.23	2.23	2.23	2.2	2.50	2.50	2.49	2.5	2.79	2.79	2.79	2.8	3.14	3.14	3.14	3.2
	Amps	Hi PR	229	230	232	236	266	267	268	272	304	305	306	310	344	345	347	351	388	389	391	395	435	436	438	442
		Lo PR	122	122	125	130	128	129	132	137	134	136	139	144	140	141	144	149	145	146	149	155	152	153	156	161
		MBh	35.9	36.4	37.4	39.1	35.6	36.1	37.1	38.7	34.6	35.1	36.2	37.8	33.1	33.6	34.6	36.2	31.1	31.6	32.7	34.3	29.3	29.8	30.9	32.5
		S/T	0.81	0.73	0.59	0.4	0.82	0.74	0.60	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.81	0.67	0.5	1.00	1.00	0.72	0.6
	1220	ΔT	22	20	17	13	22	20	17	13	22	20	17	14	22	20	17	13	21	20	16	13	23	21	17	14.1
		kW	1.78	1.78	1.77	1.8	2.00	2.00	1.99	2.0	2.24	2.24	2.24	2.3	2.51	2.51	2.50	2.5	2.81	2.81	2.80	2.8	3.16	3.15	3.15	3.2
		Amps	7.1	7.1	7.1	7.1	8.1	8.1	8.1	8.1	9.2	9.2	9.2	9.3	10.4	10.4	10.4	10.5	11.8	11.8	11.8	11.8	13.4	13.4	13.4	13.4
		Hi PR	232	233	234	238	268	269	270	274	306	307	308	312	347	348	349	353	391	392	393	397	438	439	440	444
1350	Lo PR	122	124	127	132	130	131	134	139	136	138	141	146	141	143	146	151	147	148	151	157	153	155	158	163	
	MBh	36.4	36.9	37.9	39.5	36.0	36.5	37.6	39.2	35.1	35.6	36.7	38.3	33.5	34.0	35.1	36.7	31.6	32.1	33.1	34.8	29.8	30.3	31.4	33.0	
	S/T	0.84	0.76	0.63	0.5	0.85	0.77	0.63	0.5	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.5	1.00	0.84	0.70	0.6	1.00	1.00	0.75	0.6	
	ΔT	21	19	16	13	21	19	16	12	21	19	16	13	21	19	16	12	21	19	16	12	22	20	17	13.3	
1050	kW	1.79	1.78	1.78	1.8	2.01	2.00	2.00	2.0	2.25	2.25	2.25	2.3	2.52	2.52	2.51	2.5	2.82	2.81	2.81	2.8	3.16	3.16	3.16	3.2	
	Amps	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.2	9.3	9.2	9.2	9.3	10.5	10.5	10.4	10.5	11.8	11.8	11.8	11.9	13.4	13.4	13.4	13.5	
	Hi PR	233	234	236	240	269	270	272	276	307	308	310	314	348	349	351	355	392	393	395	399	439	440	442	446	
	Lo PR	124	125	129	134	131	133	136	141	138	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																											
		65°F						75°F						85°F						95°F						105°F						115°F									
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
1400	MBh	50.0	50.7	52.2	-	49.6	50.3	51.8	-	48.2	49.0	50.5	-	46.0	46.7	48.2	-	43.2	43.9	45.4	-	40.7	41.4	42.9	-	43.2	43.9	45.4	-	40.7	41.4	42.9	-	43.2	43.9	45.4	-	40.7	41.4	42.9	-
	S/T	0.58	0.50	0.36	-	0.59	0.51	0.36	-	0.61	0.53	0.39	-	0.63	0.55	0.41	-	1.00	0.58	0.43	-	1.00	0.63	0.49	-	1.00	0.58	0.43	-	1.00	0.63	0.49	-	1.00	0.58	0.43	-	1.00	0.63	0.49	-
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	16	-	20	18	14	-	21	19	16	-	20	18	14	-	21	19	16	-
	kW	2.70	2.70	2.70	-	3.04	3.04	3.03	-	3.41	3.41	3.40	-	3.82	3.81	3.81	-	4.27	4.27	4.26	-	4.80	4.80	4.79	-	4.27	4.27	4.26	-	4.80	4.80	4.79	-	4.27	4.27	4.26	-	4.80	4.80	4.79	-
	Amps	10.5	10.5	10.5	-	12.0	12.0	12.0	-	13.7	13.7	13.7	-	15.6	15.6	15.6	-	17.7	17.7	17.6	-	20.1	20.1	20.1	-	17.7	17.7	17.6	-	20.1	20.1	20.1	-	17.7	17.7	17.6	-	20.1	20.1	20.1	-
	Hi PR	243	245	246	-	282	283	285	-	323	324	325	-	366	367	369	-	413	414	416	-	463	464	466	-	366	367	369	-	413	414	416	-	366	367	369	-	413	414	416	-
	Lo PR	122	123	126	-	129	131	134	-	136	137	140	-	141	143	146	-	147	148	151	-	153	155	158	-	141	143	146	-	147	148	151	-	141	143	146	-	147	148	151	-
	MBh	50.6	51.3	52.8	-	50.1	50.8	52.3	-	48.8	49.5	51.0	-	46.5	47.2	48.7	-	43.8	44.5	46.0	-	41.2	41.9	43.5	-	46.5	47.2	48.7	-	43.8	44.5	46.0	-	46.5	47.2	48.7	-	43.8	44.5	46.0	-
	S/T	0.66	0.58	0.43	-	0.66	0.58	0.44	-	0.69	0.61	0.47	-	0.71	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.71	0.56	-	0.69	0.61	0.47	-	1.00	0.65	0.51	-	0.69	0.61	0.47	-	1.00	0.65	0.51	-
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	18	17	13	-	20	18	14	-	19	17	14	-	20	18	14	-	19	17	13	-	20	18	14	-
	kW	2.72	2.72	2.71	-	3.06	3.05	3.05	-	3.43	3.43	3.42	-	3.84	3.83	3.83	-	4.29	4.28	4.28	-	4.82	4.81	4.81	-	3.43	3.43	3.42	-	4.29	4.28	4.28	-	3.43	3.43	3.42	-	4.29	4.28	4.28	-
	Amps	10.6	10.6	10.5	-	12.1	12.1	12.1	-	13.8	13.8	13.8	-	15.7	15.7	15.6	-	17.7	17.7	17.7	-	20.2	20.2	20.1	-	13.8	13.8	13.8	-	17.7	17.7	17.7	-	13.8	13.8	13.8	-	17.7	17.7	17.7	-
Hi PR	245	247	248	-	284	285	287	-	325	326	327	-	368	369	371	-	415	416	418	-	465	466	468	-	325	326	327	-	415	416	418	-	325	326	327	-	415	416	418	-	
Lo PR	123	125	128	-	131	132	135	-	137	139	142	-	143	144	147	-	148	150	153	-	155	156	160	-	131	132	135	-	143	144	147	-	131	132	135	-	143	144	147	-	
MBh	51.0	51.7	53.2	-	50.6	51.3	52.8	-	49.3	50.0	51.5	-	47.0	47.7	49.2	-	44.2	44.9	46.4	-	41.7	42.4	43.9	-	49.3	50.0	51.5	-	44.2	44.9	46.4	-	49.3	50.0	51.5	-	44.2	44.9	46.4	-	
S/T	0.69	0.62	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	0.73	0.65	0.51	-	1.00	0.69	0.55	-	0.73	0.65	0.51	-	1.00	0.69	0.55	-	
ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	19	17	14	-	18	16	13	-	19	17	14	-	18	16	13	-	19	17	14	-	
kW	2.73	2.73	2.73	-	3.07	3.07	3.06	-	3.44	3.44	3.43	-	3.85	3.84	3.84	-	4.30	4.30	4.29	-	4.83	4.83	4.82	-	3.44	3.44	3.43	-	4.30	4.30	4.29	-	3.44	3.44	3.43	-	4.30	4.30	4.29	-	
Amps	10.6	10.6	10.6	-	12.2	12.2	12.1	-	13.9	13.9	13.8	-	15.7	15.7	15.7	-	17.8	17.8	17.8	-	20.2	20.2	20.2	-	13.9	13.9	13.8	-	17.8	17.8	17.8	-	13.9	13.9	13.8	-	17.8	17.8	17.8	-	
Hi PR	247	248	250	-	286	287	288	-	326	327	329	-	370	371	372	-	417	418	419	-	467	468	469	-	326	327	329	-	417	418	419	-	326	327	329	-	417	418	419	-	
Lo PR	124	126	129	-	132	133	137	-	138	140	143	-	144	146	149	-	149	151	154	-	156	158	161	-	132	133	137	-	144	146	149	-	132	133	137	-	144	146	149	-	

Shaded area is ACCA (TVA) conditions
 IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1840	MBh	58.2	59.0	60.8	-	57.7	58.5	60.3	-	56.2	57.0	58.8	-	53.6	54.5	56.2	-	50.5	51.3	53.0	-	47.6	48.4	50.1	-
		S/T	0.66	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.48	-	0.72	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.71	0.58	-
		DT	18	17	13	-	18	17	13	-	19	17	14	-	18	17	13	-	18	16	13	-	19	18	14	-
		KW	3.23	3.22	3.22	-	3.63	3.63	3.62	-	4.08	4.08	4.07	-	4.57	4.56	4.56	-	5.11	5.11	5.10	-	5.75	5.75	5.74	-
		Amps	12.7	12.7	12.7	-	14.6	14.6	14.5	-	16.6	16.6	16.6	-	18.9	18.9	18.8	-	21.4	21.3	21.3	-	24.3	24.3	24.2	-
	2000	Hi PR	250	251	253	-	289	290	292	-	330	331	333	-	375	376	377	-	422	423	425	-	473	474	476	-
		Lo PR	118	120	123	-	126	127	130	-	132	133	136	-	137	138	141	-	142	144	147	-	149	150	153	-
		MBh	58.9	59.7	61.4	-	58.3	59.1	60.9	-	56.8	57.6	59.4	-	54.3	55.1	56.8	-	51.1	51.9	53.6	-	48.2	49.0	50.7	-
		S/T	0.69	0.61	0.48	-	0.70	0.62	0.49	-	0.72	0.65	0.51	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-
		DT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	13	-
2250	KW	3.24	3.23	3.23	-	3.64	3.64	3.63	-	4.09	4.09	4.08	-	4.58	4.58	4.57	-	5.12	5.12	5.11	-	5.76	5.76	5.75	-	
	Amps	12.8	12.8	12.7	-	14.6	14.6	14.6	-	16.7	16.7	16.6	-	18.9	18.9	18.9	-	21.4	21.4	21.4	-	24.3	24.3	24.3	-	
	Hi PR	252	253	254	-	291	292	294	-	332	333	335	-	376	377	379	-	424	425	426	-	474	475	477	-	
	Lo PR	120	121	124	-	127	128	131	-	133	135	138	-	138	140	143	-	144	145	148	-	150	151	154	-	
	MBh	60.0	60.8	62.5	-	59.5	60.3	62.0	-	58.0	58.8	60.5	-	55.4	56.2	57.9	-	52.2	53.0	54.8	-	49.3	50.2	51.9	-	

75	1840	MBh	58.3	59.1	60.8	63.4	57.8	58.6	60.3	62.9	56.3	57.1	58.8	61.4	53.7	54.5	56.2	58.8	50.5	51.3	53.0	55.7	47.6	48.4	50.2	52.8
		S/T	0.79	0.72	0.58	0.4	0.80	0.72	0.59	0.4	0.82	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5	1.00	0.84	0.71	0.6
		DT	22	21	17	14	22	21	17	14	23	21	17	14	22	21	17	14	22	20	17	13	23	21	18	14.6
		KW	3.22	3.22	3.21	3.2	3.63	3.62	3.62	3.6	4.08	4.07	4.07	4.1	4.56	4.56	4.55	4.6	5.11	5.11	5.10	5.1	5.75	5.74	5.74	5.8
		Amps	12.7	12.7	12.7	12.8	14.6	14.6	14.5	14.7	16.6	16.6	16.6	16.7	18.9	18.8	18.8	19.0	21.4	21.3	21.3	21.4	24.3	24.3	24.2	24.4
	2000	Hi PR	250	252	253	258	290	291	292	297	331	332	333	338	375	376	378	382	422	423	425	430	473	474	476	480
		Lo PR	118	120	123	128	126	127	130	135	132	133	136	141	137	139	141	146	142	144	147	152	149	150	153	158
		MBh	58.9	59.7	61.4	64.0	58.4	59.2	60.9	63.5	56.9	57.7	59.4	62.0	54.3	55.1	56.8	59.4	51.1	51.9	53.7	56.3	48.2	49.1	50.8	53.4
		S/T	0.82	0.74	0.61	0.5	0.83	0.75	0.61	0.5	0.85	0.78	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.82	0.68	0.5	1.00	0.87	0.73	0.6
		DT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	13.9
2250	KW	3.24	3.23	3.23	3.3	3.64	3.64	3.63	3.7	4.09	4.09	4.08	4.1	4.58	4.57	4.57	4.6	5.12	5.12	5.11	5.1	5.76	5.76	5.75	5.8	
	Amps	12.8	12.8	12.7	12.9	14.6	14.6	14.6	14.7	16.7	16.7	16.6	16.8	18.9	18.9	18.9	19.0	21.4	21.4	21.4	21.5	24.3	24.3	24.3	24.4	
	Hi PR	252	253	255	259	291	292	294	298	332	333	335	339	376	377	379	383	424	425	427	431	475	476	477	482	
	Lo PR	120	121	124	129	127	128	131	136	133	135	138	143	138	140	143	148	144	145	148	153	150	151	154	159	
	MBh	60.0	60.8	62.5	65.2	59.5	60.3	62.0	64.7	58.0	58.8	60.5	63.1	55.4	56.2	57.9	60.6	52.3	53.1	54.8	57.4	49.4	50.2	51.9	54.5	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	1840	58.6	59.4	61.1	63.7	58.1	58.9	60.6	63.2	56.6	57.4	59.1	61.7	54.0	54.8	56.5	59.1	50.8	51.6	53.3	56.0	47.9	48.7	50.5	53.1
	S/T	0.92	0.84	0.71	0.6	1.00	0.85	0.71	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.83	0.7
	DT	26	25	21	18	26	25	21	18	27	25	22	18	26	25	21	18	26	24	21	17	27	26	22	18.6
	KW	3.22	3.22	3.21	3.2	3.63	3.63	3.62	3.6	4.08	4.08	4.07	4.1	4.57	4.56	4.56	4.6	5.11	5.11	5.10	5.1	5.75	5.75	5.74	5.8
	Amps	12.7	12.7	12.7	12.8	14.6	14.6	14.5	14.7	16.6	16.6	16.6	16.7	18.9	18.9	18.8	19.0	21.4	21.3	21.3	21.5	24.3	24.3	24.2	24.4
	Hi PR	251	252	254	258	290	291	293	297	331	332	334	338	375	376	378	382	423	424	426	430	474	475	476	481
	Lo PR	119	120	123	128	126	128	131	135	132	134	137	142	138	139	142	147	143	144	147	152	149	151	154	159
	2000	59.2	60.0	61.7	64.3	58.7	59.5	61.2	63.8	57.2	58.0	59.7	62.3	54.6	55.4	57.1	59.7	51.4	52.2	54.0	56.6	48.5	49.4	51.1	53.7
	S/T	0.95	0.87	0.73	0.6	1.00	0.88	0.74	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.7
DT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18.0	
KW	3.24	3.23	3.23	3.3	3.64	3.64	3.63	3.7	4.09	4.09	4.08	4.1	4.58	4.58	4.57	4.6	5.12	5.12	5.11	5.1	5.76	5.76	5.75	5.8	
Amps	12.8	12.8	12.7	12.9	14.6	14.6	14.6	14.7	16.7	16.7	16.6	16.8	18.9	18.9	18.9	19.0	21.4	21.4	21.4	21.5	24.3	24.3	24.3	24.4	
Hi PR	252	253	255	259	291	293	294	299	332	334	335	340	377	378	379	384	424	425	427	431	475	476	478	482	
Lo PR	120	122	125	130	127	129	132	137	134	135	138	143	139	140	143	148	144	145	148	153	151	152	155	160	
2250	60.3	61.1	62.8	65.5	59.8	60.6	62.3	64.9	58.3	59.1	60.8	63.4	55.7	56.5	58.2	60.9	52.6	53.4	55.1	57.7	49.7	50.5	52.2	54.8	
S/T	1.00	0.89	0.75	0.6	1.00	0.89	0.76	0.6	1.00	0.92	0.78	0.6	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.88	0.7	
DT	25	23	20	16	25	23	20	16	25	23	20	16	25	23	20	16	25	23	19	16	26	24	21	17.0	
KW	3.25	3.25	3.24	3.3	3.66	3.66	3.65	3.7	4.11	4.11	4.10	4.1	4.60	4.59	4.59	4.6	5.14	5.14	5.13	5.2	5.78	5.78	5.77	5.8	
Amps	12.9	12.8	12.8	13.0	14.7	14.7	14.7	14.8	16.8	16.8	16.7	16.9	19.0	19.0	19.0	19.1	21.5	21.5	21.5	21.6	24.4	24.4	24.4	24.5	
Hi PR	255	256	257	262	294	295	297	301	335	336	338	342	379	380	382	386	427	428	429	434	477	478	480	484	
Lo PR	123	124	127	132	130	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	154	157	162	
85	1969	59.5	60.3	62.1	64.7	59.0	59.8	61.6	64.2	57.5	58.3	60.1	62.7	54.9	55.8	57.5	60.1	51.8	52.6	54.3	56.9	48.9	49.7	51.4	54.1
	S/T	1.00	0.94	0.81	0.7	1.00	0.95	0.81	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.93	0.8
	DT	30	28	25	21	30	28	25	21	30	28	25	22	30	28	25	21	30	28	25	21	31	29	26	22.2
	KW	3.23	3.23	3.22	3.3	3.64	3.63	3.63	3.7	4.09	4.08	4.08	4.1	4.57	4.57	4.56	4.6	5.12	5.12	5.11	5.1	5.76	5.75	5.75	5.8
	Amps	12.8	12.7	12.7	12.9	14.6	14.6	14.6	14.7	16.7	16.7	16.6	16.8	18.9	18.9	18.9	19.0	21.4	21.4	21.3	21.5	24.3	24.3	24.3	24.4
	Hi PR	252	253	255	259	291	292	294	298	332	333	335	339	376	377	379	384	424	425	427	431	475	476	478	482
	Lo PR	121	122	125	130	128	129	132	137	134	136	138	143	139	141	144	149	145	146	149	154	151	152	155	160
	1750	60.2	61.0	62.7	65.3	59.6	60.4	62.2	64.8	58.1	58.9	60.7	63.3	55.6	56.4	58.1	60.7	52.4	53.2	54.9	57.5	49.5	50.3	52.0	54.7
	S/T	1.00	0.97	0.83	0.7	1.00	0.98	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.96	0.8
DT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21.5	
KW	3.25	3.24	3.24	3.3	3.65	3.65	3.64	3.7	4.10	4.10	4.09	4.1	4.59	4.58	4.58	4.6	5.13	5.13	5.12	5.2	5.77	5.77	5.76	5.8	
Amps	12.8	12.8	12.8	12.9	14.7	14.7	14.6	14.8	16.7	16.7	16.7	16.8	19.0	18.9	18.9	19.1	21.5	21.4	21.4	21.5	24.4	24.4	24.3	24.5	
Hi PR	253	255	256	261	293	294	295	300	334	335	336	341	378	379	381	385	425	427	428	433	476	477	479	483	
Lo PR	122	123	126	131	129	131	134	139	135	137	140	145	141	142	145	150	146	147	150	155	152	154	157	162	
1531	61.3	62.1	63.8	66.4	60.8	61.6	63.3	65.9	59.3	60.1	61.8	64.4	56.7	57.5	59.2	61.8	53.5	54.3	56.1	58.7	50.6	51.5	53.2	55.8	
S/T	1.00	0.99	0.85	0.7	1.00	0.99	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.93	0.8	1.00	1.00	1.00	0.8	
DT	28	27	23	20	28	27	23	20	29	27	23	20	28	27	23	20	28	26	23	19	29	27	24	20.6	
KW	3.26	3.26	3.25	3.3	3.67	3.66	3.66	3.7	4.12	4.11	4.11	4.1	4.60	4.60	4.59	4.6	5.15	5.15	5.14	5.2	5.79	5.78	5.78	5.8	
Amps	12.9	12.9	12.9	13.0	14.7	14.7	14.7	14.8	16.8	16.8	16.8	16.9	19.0	19.0	19.0	19.1	21.5	21.5	21.5	21.6	24.5	24.4	24.4	24.6	
Hi PR	256	257	259	263	295	296	298	302	336	337	339	343	380	381	383	387	428	429	431	435	479	480	481	486	
Lo PR	124	126	129	134	131	133	136	141	138	139	142	147	143	144	147	152	148	150	152	157	155	156	159	164	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is AHRI (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

GSZC180361C*+CA*F3743*6D*+MBVC1600-1A*+TXV — HIGH STAGE**

100% CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	44.14	41.58	39.07	36.60	35.00	33.83	31.03	28.24	26.03	24.39	23.23	22.60	21.77	19.71	17.64	15.57	13.51
T/R	32.21	30.64	29.07	27.51	26.56	25.74	23.55	21.47	19.76	18.51	17.63	17.15	16.52	14.96	13.39	11.82	10.25
kW	2.78	2.74	2.70	2.67	2.64	2.63	2.59	2.55	2.52	2.48	2.44	2.42	2.40	2.36	2.33	2.29	2.25
Amps	10.1	10.0	9.8	9.7	9.6	9.5	9.3	9.2	9.0	8.8	8.7	8.6	8.5	8.3	8.2	8.0	7.9
COP	4.65	4.45	4.23	4.02	3.88	3.77	3.51	3.24	3.03	2.89	2.79	2.74	2.66	2.44	2.22	1.99	1.76
Hi PR	418	404	390	377	369	363	350	336	323	309	295	287	282	268	255	241	227

GSZC180481C*+CA*F4961*6D*+MBVC2000-1A*+TXV — HIGH STAGE**

100% CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	67.74	63.10	58.87	54.06	51.00	48.58	42.62	37.28	32.94	29.66	27.15	25.80	24.12	19.92	15.72	11.52	7.32
T/R	34.99	32.76	30.54	28.32	26.99	25.70	22.55	19.72	17.43	15.69	14.36	13.65	12.76	10.54	8.32	6.09	3.87
kW	4.83	4.64	4.45	4.26	4.15	4.08	3.89	3.70	3.51	3.33	3.14	3.02	2.95	2.76	2.57	2.39	2.20
Amps	18.2	17.4	16.6	15.8	15.3	14.9	14.1	13.3	12.5	11.7	10.9	10.4	10.0	9.2	8.4	7.6	6.8
LO PR	140	131	123	114	109	105	96	88	79	70	62	56	53	44	35	27	18

GSZC180601C*+CA*F4961*6D*+MBVC2000-1A*+TXV — HIGH STAGE**

100% CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	77.42	72.40	67.46	62.61	59.50	57.20	51.36	45.97	41.58	38.31	35.90	34.60	32.94	28.79	24.64	20.49	16.34
T/R	37.46	35.37	33.29	31.20	29.94	28.78	25.84	23.13	20.92	19.28	18.06	17.41	16.58	14.49	12.40	10.31	8.22
kW	5.11	5.03	4.96	4.89	4.84	4.82	4.74	4.67	4.60	4.52	4.45	4.41	4.38	4.31	4.23	4.16	4.09
Amps	19.3	19.0	18.6	18.3	18.1	18.0	17.7	17.4	17.1	16.8	16.4	16.2	16.1	15.8	15.5	15.2	14.9
COP	4.44	4.22	3.99	3.75	3.60	3.48	3.17	2.89	2.65	2.48	2.36	2.30	2.20	1.96	1.71	1.44	1.17
Hi PR	459	444	429	414	405	399	384	369	354	339	324	315	310	295	280	265	250
LO PR	134	126	117	109	104	101	92	84	76	67	59	54	51	42	34	26	17

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

GSZC180361C*+CA*F3743*6D*+MBVC1600-1A*+TXV — LOW STAGE**

70% CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	33.01	30.84	28.70	26.59	25.25	24.24	21.70	19.37	17.47	16.05	14.99	14.43	13.71	11.90	10.10	8.30	6.49
T/R	34.58	32.61	30.65	28.69	27.51	26.41	23.64	21.10	19.03	17.48	16.33	15.72	14.93	12.97	11.00	9.04	7.07
kW	1.70	1.65	1.61	1.56	1.53	1.51	1.46	1.41	1.36	1.31	1.26	1.23	1.22	1.17	1.12	1.07	1.02
Amps	6.1	5.8	5.6	5.4	5.3	5.2	5.0	4.8	4.6	4.4	4.1	4.0	3.9	3.7	3.5	3.3	3.1
COP	5.68	5.46	5.24	5.01	4.85	4.71	4.36	4.03	3.76	3.58	3.48	3.43	3.31	2.99	2.65	2.28	1.87
Hi PR	405	392	378	365	357	352	339	326	313	299	286	278	273	260	247	234	220

GSZC180481C*+CA*F4961*6D*+MBVC2000-1A*+TXV — LOW STAGE**

70% CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	48.87	45.52	42.52	39.08	36.79	34.79	29.97	25.71	22.26	19.63	17.57	16.47	15.12	11.73	8.34	4.96	1.57
T/R	39.35	36.65	33.99	31.26	29.62	28.01	24.13	20.70	17.93	15.80	14.15	13.26	12.17	9.44	6.72	3.99	1.26
kW	2.91	2.77	2.63	2.48	2.40	2.34	2.20	2.06	1.91	1.77	1.63	1.54	1.49	1.35	1.20	1.06	0.92
Amps	10.8	10.2	9.6	9.0	8.6	8.4	7.7	7.1	6.5	5.9	5.3	4.9	4.6	4.0	3.4	2.8	2.2
LO PR	137	129	120	112	107	103	95	86	78	69	61	55	52	43	35	26	18

GSZC180601C*+CA*F4961*6D*+MBVC2000-1A*+TXV — LOW STAGE**

70% CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	57.01	53.11	49.45	45.46	42.92	40.93	36.01	31.58	27.98	25.27	23.20	22.09	20.70	17.23	13.76	10.28	6.81
T/R	42.77	40.09	37.41	34.73	33.12	31.58	27.78	24.37	21.59	19.50	17.90	17.04	15.97	13.29	10.61	7.93	5.25
kW	3.13	3.04	2.94	2.85	2.80	2.76	2.67	2.58	2.49	2.40	2.31	2.25	2.22	2.12	2.03	1.94	1.85
Amps	11.7	11.3	10.9	10.5	10.3	10.1	9.7	9.3	8.9	8.5	8.1	7.9	7.7	7.3	6.9	6.5	6.1
COP	5.34	5.13	4.92	4.67	4.50	4.34	3.95	3.59	3.30	3.09	2.95	2.88	2.74	2.38	1.98	1.55	1.08
Hi PR	445	430	416	401	392	387	372	358	343	329	314	306	300	285	271	257	242
LO PR	132	124	115	107	102	99	91	83	74	66	58	53	50	42	33	25	17

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power



ENERGY STAR-CERTIFIED COMBINATIONS [^]

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS >				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI ⁴	HSPF ⁵	LOW ⁶		
GSZC18 0361C*	AVPTC37C14A*		35,600	28,400	18.0	13.5	34,400	27,800	35,800	10.00	22,600	1,130	10570186
	CA*F3743*6D*+MBVC1600**-1A*+TX		34,800	27,600	18.0	14.0	33,600	27,000	35,000	10.00	22,600	1,220	10570136
	CA*F3743*6D*+TXV	G*VC81005C*B*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.00	22,600	1,140	10570216
GSZC18 0481C*	AVPTC61D14A*		49,000	39,800	18.0	13.0	47,200	39,000	51,000	9.50	30,000	1,760	10570253
	CA*F4961*6D*+MBVC2000**-1A*+TX		49,500	40,400	18.0	13.0	47,800	39,400	51,000	9.50	25,800	1,750	10570137
	CA*F4961*6D*+TXV	G*VC80805D*B*	48,000	39,000	18.0	13.0	46,200	38,200	49,000	9.20	29,000	1,560	10570258
GSZC18 0601C*	AVPTC61D14A*		56,000	43,500	17.0	12.5	54,000	42,500	59,000	9.50	37,000	1,790	10570274
	CA*F4961*6D*+MBVC2000**-1A*+TX		56,500	44,000	17.0	12.5	54,500	43,000	59,500	9.50	34,600	1,840	10570138
	CA*F4961*6D*+TXV	G*VC80805D*B*	55,000	43,000	16.0	12.5	53,000	42,000	59,500	9.50	36,400	1,460	10570278

[^] Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR[®] criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet ENERGY STAR requirements.

> Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁵ HSPF = Heating Seasonal Performance Factor

⁷ CFM at High stage

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240

⁶ Heating capacity at 17°F outdoor

⁸ CFM at Intermediate and low stage

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman brand gas furnace contains the EEP cooling time delay.

OTHER AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^				TVA RATINGS ^3		HEATING RATINGS ^			CFM	AHRI #	ENERGY STAR	
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ^1	EER ^2	TOTAL	SENS.	HI ^4	HSPF ^5	LOW ^6				
GSZC18 0361C*	AVPTC37C14A*		35,600	28,400	18.0	13.5	34,400	27,800	35,800	10.0	22,600	1,130	10570186	Yes	
	AVPTC37D14A*		35,800	28,400	18.0	13.5	34,600	28,000	36,000	10.0	22,800	1,210	10570187	No	
	CA*F3743*6D*+TXV		34,800	27,600	18.0	14.0	33,600	27,000	35,000	10.0	22,600	1,220	10570136	Yes	
	CA*F3743*6D*+TXV		35,000	27,800	18.0	14.0	33,800	27,200	36,000	9.8	23,000	1,270	10570190	No	
	CA*F3743*6D*+TXV	G*VC80604B*B*		34,600	27,600	17.5	13.5	33,400	27,000	35,600	9.6	22,400	1,100	10570196	No
	CA*F3743*6D*+TXV	G*VC80803B*B*		34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,400	1,100	10570199	No
	CA*F3743*6D*+TXV	G*VC80804C*B*		34,600	27,600	17.5	13.5	33,400	27,000	35,600	9.6	22,400	1,100	10570201	No
	CA*F3743*6D*+TXV	G*VC80805C*B*		35,000	27,800	17.5	13.5	33,800	27,200	35,600	9.6	22,600	1,200	10570204	No
	CA*F3743*6D*+TXV	G*VC80805D*B*		34,600	27,600	17.5	13.5	33,400	27,000	35,600	9.6	22,400	1,100	10570210	No
	CA*F3743*6D*+TXV	G*VC81005C*B*		35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.0	22,600	1,140	10570216	Yes
	CA*F3743*6D*+TXV	G*VC960403BNA*		34,400	27,400	17.5	13.0	33,200	26,800	35,400	9.5	22,000	1,100	10570221	No
	CA*F3743*6D*+TXV	G*VC960603BNA*		34,000	27,000	17.0	13.0	32,800	26,400	35,000	9.2	22,200	1,135	10570224	No
	CA*F3743*6D*+TXV	G*VC960803BNA*		34,000	27,000	17.0	12.5	32,800	26,400	35,600	9.2	22,200	1,140	10570230	No
	CA*F3743*6D*+TXV	G*VC960804CNA*		34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,400	1,190	10570236	No
	CA*F3743*6D*+TXV	G*VC961005CNA*		34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,600	1,180	10570244	No
	CA*F3743*6D*+TXV	G*VM970603BNA*		34,000	27,000	17.0	13.0	32,800	26,400	35,000	9.2	22,200	1,135	10570225	No
	CA*F3743*6D*+TXV	G*VM970803BNA*		34,000	27,000	17.0	12.5	32,800	26,400	35,600	9.2	22,200	1,140	10570231	No
	CA*F3743*6D*+TXV	G*VM970804CNA*		34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,400	1,190	10570237	No
	CA*F3743*6D*+TXV	G*VM971005CNA*		34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,600	1,180	10570245	No
	CA*F4860*6D*+TXV	G*VC80805C*B*		35,000	27,800	17.5	13.5	33,800	27,200	35,600	9.6	22,600	1,200	10570205	No
	CA*F4860*6D*+TXV	G*VC80805D*B*		34,600	27,600	17.5	13.5	33,400	27,000	35,600	9.6	22,400	1,100	10570211	No
	CA*F4961*6D*+TXV			36,000	28,600	18.5	14.0	34,800	28,000	36,400	10.0	23,000	1,200	10570188	No
	CA*F4961*6D*+TXV			36,000	28,600	19.0	14.0	34,800	28,000	36,600	10.0	23,200	1,270	10570191	No
	CA*F4961*6D*+TXV	G*VC80603B*B*		35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,600	1,110	10570194	No
	CA*F4961*6D*+TXV	G*VC80604B*B*		35,000	27,800	17.5	13.5	33,800	27,200	36,000	9.6	22,800	1,100	10570197	No
	CA*F4961*6D*+TXV	G*VC80803B*B*		35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,800	1,100	10570200	No
	CA*F4961*6D*+TXV	G*VC80804C*B*		35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.0	23,000	1,100	10570202	No
	CA*F4961*6D*+TXV	G*VC80805C*B*		35,600	28,400	18.0	14.0	34,400	27,800	36,600	10.0	23,000	1,200	10570206	No
	CA*F4961*6D*+TXV	G*VC80805D*B*		35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.0	22,600	1,100	10570212	No
	CA*F4961*6D*+TXV	G*VC81005C*B*		35,600	28,400	18.0	14.0	34,400	27,800	36,000	10.0	23,000	1,150	10570217	No
CA*F4961*6D*+TXV	G*VC960403BNA*		34,800	27,600	17.5	13.0	33,600	27,000	35,800	9.5	22,400	1,100	10570222	No	
CA*F4961*6D*+TXV	G*VC960603BNA*		34,600	27,600	17.5	13.0	33,400	27,000	35,000	9.5	22,600	1,135	10570226	No	
CA*F4961*6D*+TXV	G*VC960803BNA*		35,000	27,800	17.5	13.0	33,800	27,200	36,000	9.5	22,600	1,140	10570232	No	

See Notes on Page 22.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^				TVA RATINGS ^3		HEATING RATINGS ^			CFM	AHRI #	ENERGY STAR
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ^1	EER ^2	TOTAL	SENS.	HI ^4	HSPF ^5	Low ^6			
GSZC18 0361C*	CA*F4961*6D*+TXV	G*VC960804CNA*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,600	1,190	10570238	No
	CA*F4961*6D*+TXV	G*VC961005CNA*	35,400	28,200	18.0	14.0	34,200	27,600	36,400	10.0	22,800	1,180	10570246	No
	CA*F4961*6D*+TXV	G*VM970603BNA*	34,600	27,600	17.5	13.0	33,400	27,000	35,000	9.5	22,600	1,135	10570227	No
	CA*F4961*6D*+TXV	G*VM970803BNA*	35,000	27,800	17.5	13.0	33,800	27,200	36,000	9.5	22,600	1,140	10570233	No
	CA*F4961*6D*+TXV	G*VM970804CNA*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,600	1,190	10570239	No
	CA*F4961*6D*+TXV	G*VM971005CNA*	35,400	28,200	18.0	14.0	34,200	27,600	36,400	10.0	22,800	1,180	10570247	No
	CHPF3743C6B*+TXV	MBVC1600**-1A*+TXV	35,000	27,800	17.5	13.0	33,800	27,200	36,000	9.5	23,000	1,160	10570189	No
	CHPF3743C6B*+TXV	G*VC80603B*B*	34,600	27,600	17.5	13.0	33,400	27,000	35,600	9.6	22,200	1,110	10570195	No
	CHPF3743C6B*+TXV	G*VC80604B*B*	34,600	27,600	17.5	13.0	33,400	27,000	35,600	9.6	22,200	1,100	10570198	No
	CHPF3743C6B*+TXV	G*VC80803B*B*	34,000	27,000	17.5	13.0	32,800	26,400	35,000	9.5	22,000	1,075	10570304	No
	CHPF3743C6B*+TXV	G*VC80804C*B*	34,000	27,000	17.5	13.0	32,800	26,400	35,000	9.6	22,000	1,090	10570203	No
	CHPF3743C6B*+TXV	G*VC80805C*B*	34,600	27,600	17.5	13.0	33,400	27,000	35,600	9.6	22,400	1,175	10570207	No
	CHPF3743C6B*+TXV	G*VC80805D*B*	34,000	27,000	17.5	13.0	32,800	26,400	35,000	9.6	22,000	1,090	10570213	No
	CHPF3743C6B*+TXV	G*VC81005C*B*	34,800	27,600	18.0	13.5	33,600	27,000	35,800	9.6	22,400	1,150	10570218	No
	CHPF3743C6B*+TXV	G*VC960403BNA*	34,000	27,000	17.0	13.0	32,800	26,400	34,600	9.5	22,000	1,100	10570223	No
	CHPF3743C6B*+TXV	G*VC960603BNA*	34,000	27,000	17.5	12.5	32,800	26,400	35,000	9.2	22,000	1,120	10570228	No
	CHPF3743C6B*+TXV	G*VC960803BNA*	34,000	27,000	17.0	12.5	32,800	26,400	35,200	9.2	22,000	1,130	10570234	No
	CHPF3743C6B*+TXV	G*VC960804CNA*	34,000	27,000	17.5	13.0	32,800	26,400	35,000	9.6	22,000	1,170	10570240	No
	CHPF3743C6B*+TXV	G*VC961005CNA*	34,600	27,600	17.5	13.0	33,400	27,000	35,400	9.6	22,200	1,160	10570248	No
	CHPF3743C6B*+TXV	G*VM970603BNA*	34,000	27,000	17.5	12.5	32,800	26,400	35,000	9.2	22,000	1,120	10570229	No
	CHPF3743C6B*+TXV	G*VM970803BNA*	34,000	27,000	17.0	12.5	32,800	26,400	35,200	9.2	22,000	1,130	10570235	No
	CHPF3743C6B*+TXV	G*VM970804CNA*	34,000	27,000	17.5	13.0	32,800	26,400	35,000	9.6	22,000	1,170	10570241	No
	CHPF3743C6B*+TXV	G*VM971005CNA*	34,600	27,600	17.5	13.0	33,400	27,000	35,400	9.6	22,200	1,160	10570249	No
	CHPF3743D6B*+TXV	MBVC2000**-1A*+TXV	35,000	27,800	18.0	14.0	33,800	27,200	36,000	9.8	23,000	1,270	10570192	No
	CHPF3743D6B*+TXV	G*VC80805C*B*	34,600	27,600	17.5	13.5	33,400	27,000	35,600	9.6	22,400	1,200	10570208	No
	CHPF3743D6B*+TXV	G*VC80805D*B*	34,600	27,600	17.5	13.5	33,400	27,000	35,600	9.6	22,400	1,100	10570214	No
	CHPF3743D6B*+TXV	G*VC81005C*B*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.0	22,600	1,150	10570219	No
	CHPF4860D6D*+TXV	MBVC2000**-1A*+TXV	35,600	28,400	18.5	14.0	34,400	27,800	36,000	10.0	23,200	1,270	10570193	No
	CHPF4860D6D*+TXV	G*VC80805C*B*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.0	22,600	1,200	10570209	No
	CHPF4860D6D*+TXV	G*VC80805D*B*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	10.0	22,600	1,100	10570215	No
	CHPF4860D6D*+TXV	G*VC81005C*B*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,600	1,150	10570220	No
	CHPF4860D6D*+TXV	G*VC960804CNA*	34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,400	1,190	10570242	No
CHPF4860D6D*+TXV	G*VC961005CNA*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,600	1,180	10570250	No	

See Notes on Page 22.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^				TVA RATINGS ^3		HEATING RATINGS ^			CFM	AHRI #	ENERGY STAR
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI ⁴	HSPF ⁵	LOW ⁶			
GSZC18 0361C* (Contd.)	CHPF4860D6D*+TXV	G*VC961005DNA*	35,000	27,800	18.0	13.0	33,800	27,200	36,000	10.0	22,600	1,220	10570252	No
	CHPF4860D6D*+TXV	G*VM970804CNA*	34,600	27,600	18.0	13.5	33,400	27,000	35,600	9.6	22,400	1,190	10570243	No
	CHPF4860D6D*+TXV	G*VM971005CNA*	35,000	27,800	18.0	13.5	33,800	27,200	36,000	9.6	22,600	1,180	10570251	No
GSZC18 0481C*	AVPTC61D14A*		49,000	39,800	18.0	13.0	47,200	39,000	51,000	9.5	30,000	1,760	10570253	Yes
	CA*F4961*6D*+MBVC1600*-1A*+TXV		49,000	39,800	17.5	12.5	47,200	39,000	50,500	9.2	29,400	1,700	10570254	No
	CA*F4961*6D*+MBVC2000*-1A*+TX		49,500	40,400	18.0	13.0	47,800	39,400	51,000	9.5	25,800	1,750	10570137	Yes
	CA*F4961*6D*+TXV	G*VC80805C*B*	47,500	38,600	17.0	12.5	45,800	37,800	49,000	9.0	29,000	1,515	10570256	No
	CA*F4961*6D*+TXV	G*VC80805D*B*	48,000	39,000	18.0	13.0	46,200	38,200	49,000	9.2	29,000	1,560	10570258	Yes
	CA*F4961*6D*+TXV	G*VC81005C*B*	48,000	39,000	17.0	12.5	46,200	38,200	49,000	9.0	29,000	1,525	10570260	No
	CA*F4961*6D*+TXV	G*VC960804CNA*	48,000	39,000	17.0	12.5	46,200	38,200	49,000	9.0	29,000	1,525	10570262	No
	CA*F4961*6D*+TXV	G*VC961005CNA*	47,500	38,600	17.0	12.5	45,800	37,800	49,500	9.2	29,000	1,520	10570266	No
	CA*F4961*6D*+TXV	G*VC961205DNA*	47,500	38,600	17.0	12.5	45,800	37,800	49,500	9.2	29,000	1,530	10570270	No
	CA*F4961*6D*+TXV	G*VM970804CNA*	48,000	39,000	17.0	12.5	46,200	38,200	49,000	9.0	29,000	1,525	10570263	No
	CA*F4961*6D*+TXV	G*VM971005CNA*	47,500	38,600	17.0	12.5	45,800	37,800	49,500	9.2	29,000	1,520	10570267	No
	CA*F4961*6D*+TXV	G*VM971205DNA*	47,500	38,600	17.0	12.5	45,800	37,800	49,500	9.2	29,000	1,530	10570271	No
	CHPF4860D6D*+MBVC2000*-1A*+TXV		48,000	39,000	17.5	12.5	46,200	38,200	50,000	9.5	29,800	1,750	10570255	No
	CHPF4860D6D*+TXV	G*VC80805C*B*	47,000	38,200	17.0	12.5	45,400	37,400	48,000	9.0	29,000	1,515	10570257	No
	CHPF4860D6D*+TXV	G*VC80805D*B*	47,000	38,200	17.0	12.5	45,400	37,400	48,000	9.2	29,000	1,560	10570259	No
	CHPF4860D6D*+TXV	G*VC81005C*B*	47,000	38,200	17.0	12.5	45,400	37,400	48,000	9.0	29,000	1,525	10570261	No
	CHPF4860D6D*+TXV	G*VC960804CNA*	47,000	38,200	17.0	12.5	45,400	37,400	48,000	9.0	29,000	1,525	10570264	No
	CHPF4860D6D*+TXV	G*VC961005CNA*	46,500	37,800	17.0	12.5	44,800	37,000	49,000	9.2	29,000	1,520	10570268	No
	CHPF4860D6D*+TXV	G*VC961205DNA*	46,500	37,800	17.0	12.5	44,800	37,000	49,000	9.0	29,000	1,530	10570272	No
	CHPF4860D6D*+TXV	G*VM970804CNA*	47,000	38,200	17.0	12.5	45,400	37,400	48,000	9.0	29,000	1,525	10570265	No
CHPF4860D6D*+TXV	G*VM971005CNA*	46,500	37,800	17.0	12.5	44,800	37,000	49,000	9.2	29,000	1,520	10570269	No	
CHPF4860D6D*+TXV	G*VM971205DNA*	46,500	37,800	17.0	12.5	44,800	37,000	49,000	9.0	29,000	1,530	10570273	No	
GSZC18 0601C*	AVPTC61D14A*		56,000	43,500	17.0	12.5	54,000	42,500	59,000	9.5	37,000	1,790	10570274	Yes
	CA*F4961*6D*+MBVC2000*-1A*+TX		56,500	44,000	17.0	12.5	54,500	43,000	59,500	9.5	34,600	1,840	10570138	Yes
	CA*F4961*6D*+TXV	G*VC80805C*B*	55,000	43,000	16.0	12.5	53,000	42,000	59,500	9.2	36,600	1,515	10570276	No
	CA*F4961*6D*+TXV	G*VC80805D*B*	55,000	43,000	16.0	12.5	53,000	42,000	59,500	9.5	36,400	1,460	10570278	Yes
	CA*F4961*6D*+TXV	G*VC81005C*B*	55,000	43,000	16.0	12.5	53,000	42,000	60,000	9.2	36,400	1,525	10570280	No
	CA*F4961*6D*+TXV	G*VC961005CNA*	55,000	43,000	16.0	12.5	53,000	42,000	60,500	9.2	36,600	1,520	10570282	No
	CA*F4961*6D*+TXV	G*VC961005DNA*	55,000	43,000	16.0	12.5	53,000	42,000	60,500	9.2	36,600	1,525	10570286	No
	CA*F4961*6D*+TXV	G*VC961205DNA*	55,000	43,000	16.0	12.5	53,000	42,000	59,500	9.2	36,600	1,530	10570288	No

See Notes on Page 22.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^				TVA RATINGS ^3		HEATING RATINGS ^			CFM	AHRI #	ENERGY STAR
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶			
GSZC18 0601C* (Contd.)	CA*F4961*6D*+TXV	G*VM971005CNA*	55,000	43,000	16.0	12.5	53,000	42,000	60,500	9.2	36,600	1,520	10570283	No
	CA*F4961*6D*+TXV	G*VM971205DNA*	55,000	43,000	16.0	12.5	53,000	42,000	59,500	9.2	36,600	1,530	10570289	No
	CHPF4860D6D*+MBVC2000*-1A*+TXV		54,500	42,500	16.5	12.5	52,500	41,500	59,000	9.5	35,600	1,840	10570275	No
	CHPF4860D6D*+TXV	G*VC80805C*B*	53,500	41,500	16.0	12.0	51,500	40,500	59,500	9.0	36,600	1,515	10570277	No
	CHPF4860D6D*+TXV	G*VC80805D*B*	54,000	42,000	16.0	12.5	52,000	41,000	59,500	9.5	36,400	1,460	10570279	No
	CHPF4860D6D*+TXV	G*VC81005C*B*	53,500	41,500	16.0	12.5	51,500	40,500	59,500	9.0	36,400	1,525	10570281	No
	CHPF4860D6D*+TXV	G*VC961005CNA*	53,000	41,500	16.0	12.0	51,000	40,500	59,500	9.0	36,600	1,520	10570284	No
	CHPF4860D6D*+TXV	G*VC961005DNA*	53,500	41,500	16.0	12.0	51,500	40,500	59,500	9.0	36,600	1,525	10570287	No
	CHPF4860D6D*+TXV	G*VC961205DNA*	53,500	41,500	16.0	12.0	51,500	40,500	59,000	9.0	36,600	1,530	10570290	No
	CHPF4860D6D*+TXV	G*VM971005CNA*	53,000	41,500	16.0	12.0	51,000	40,500	59,500	9.0	36,600	1,520	10570285	No
CHPF4860D6D*+TXV	G*VM971205DNA*	53,500	41,500	16.0	12.0	51,500	40,500	59,000	9.0	36,600	1,530	10570291	No	

^ Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁵ HSPF = Heating Seasonal Performance Factor

⁷ CFM at High stage

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240

⁶ Heating capacity at 17°F outdoor

⁸ CFM at Intermediate and low stage

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman brand gas furnace contains the EEP cooling time delay.

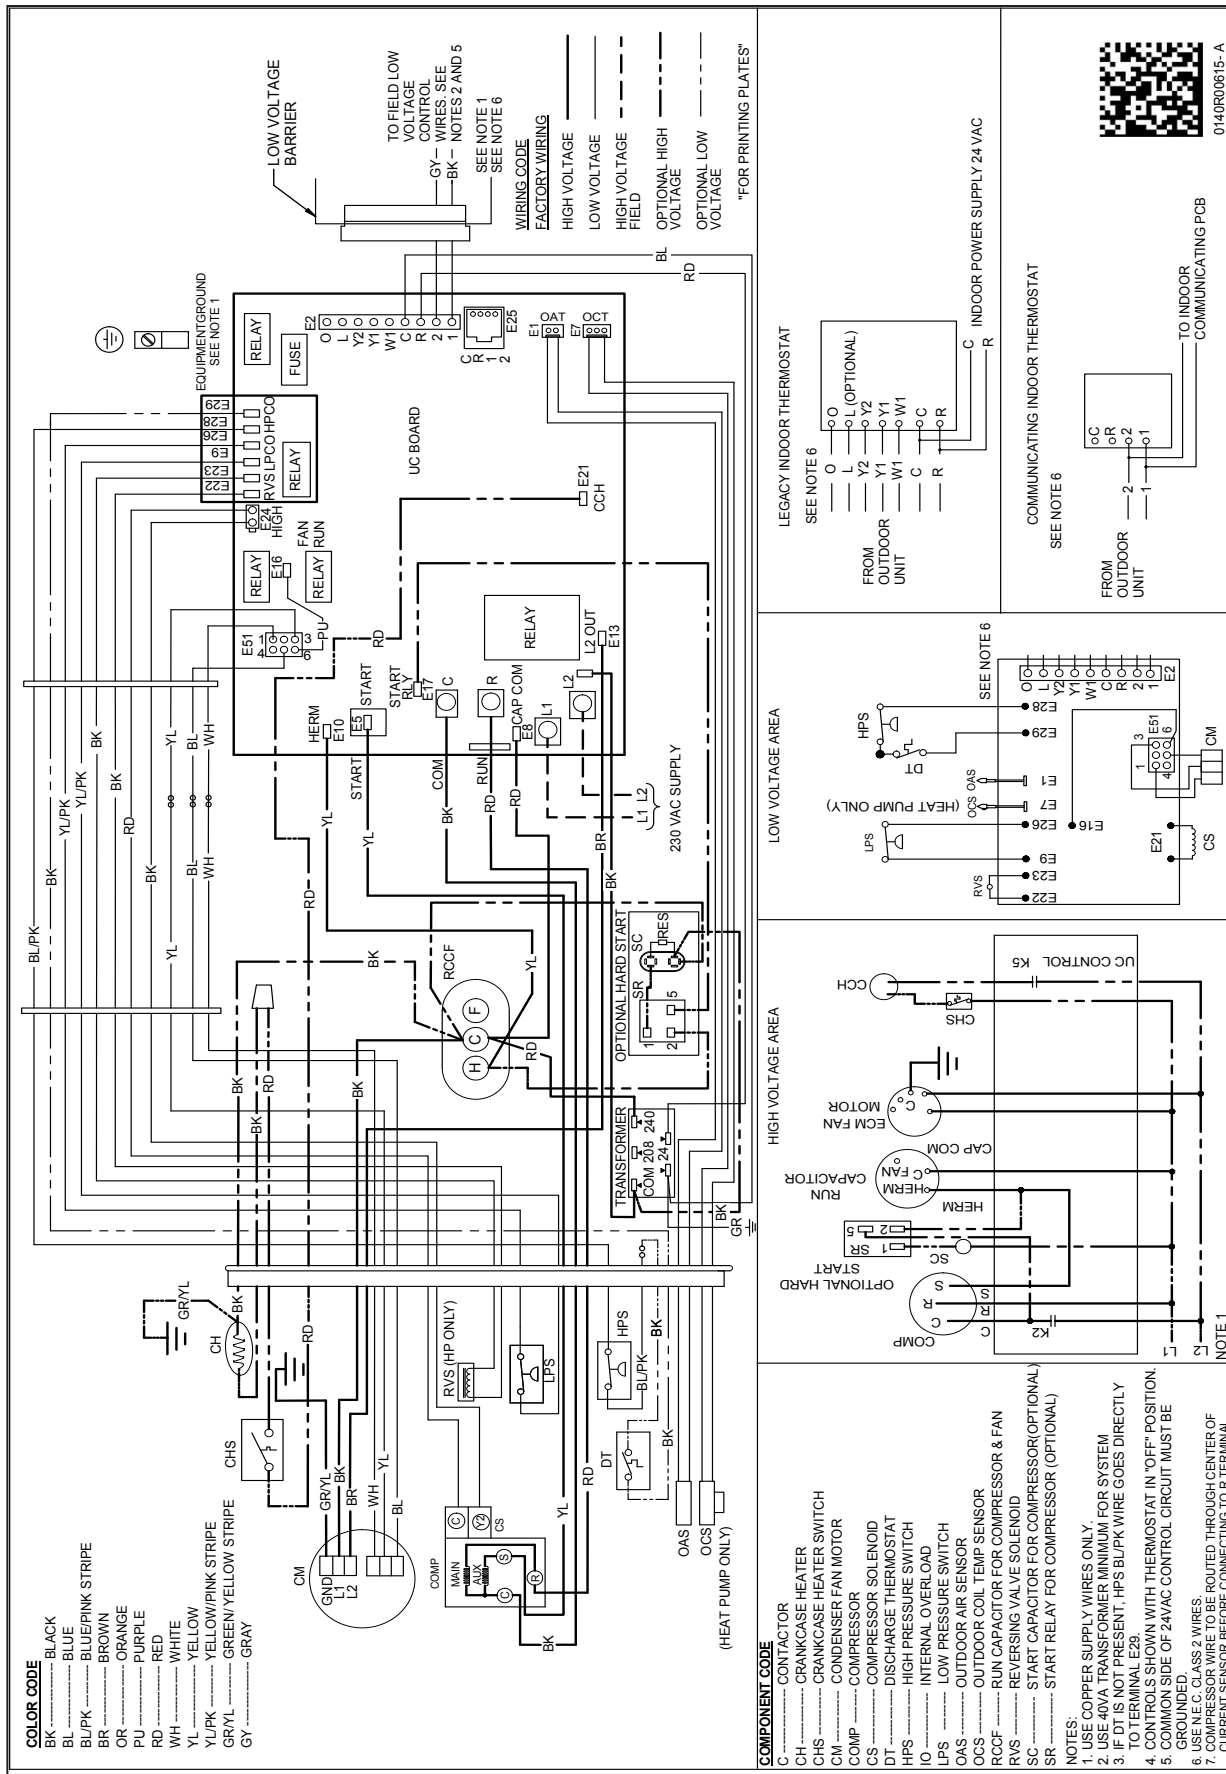


WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

DIMENSIONS

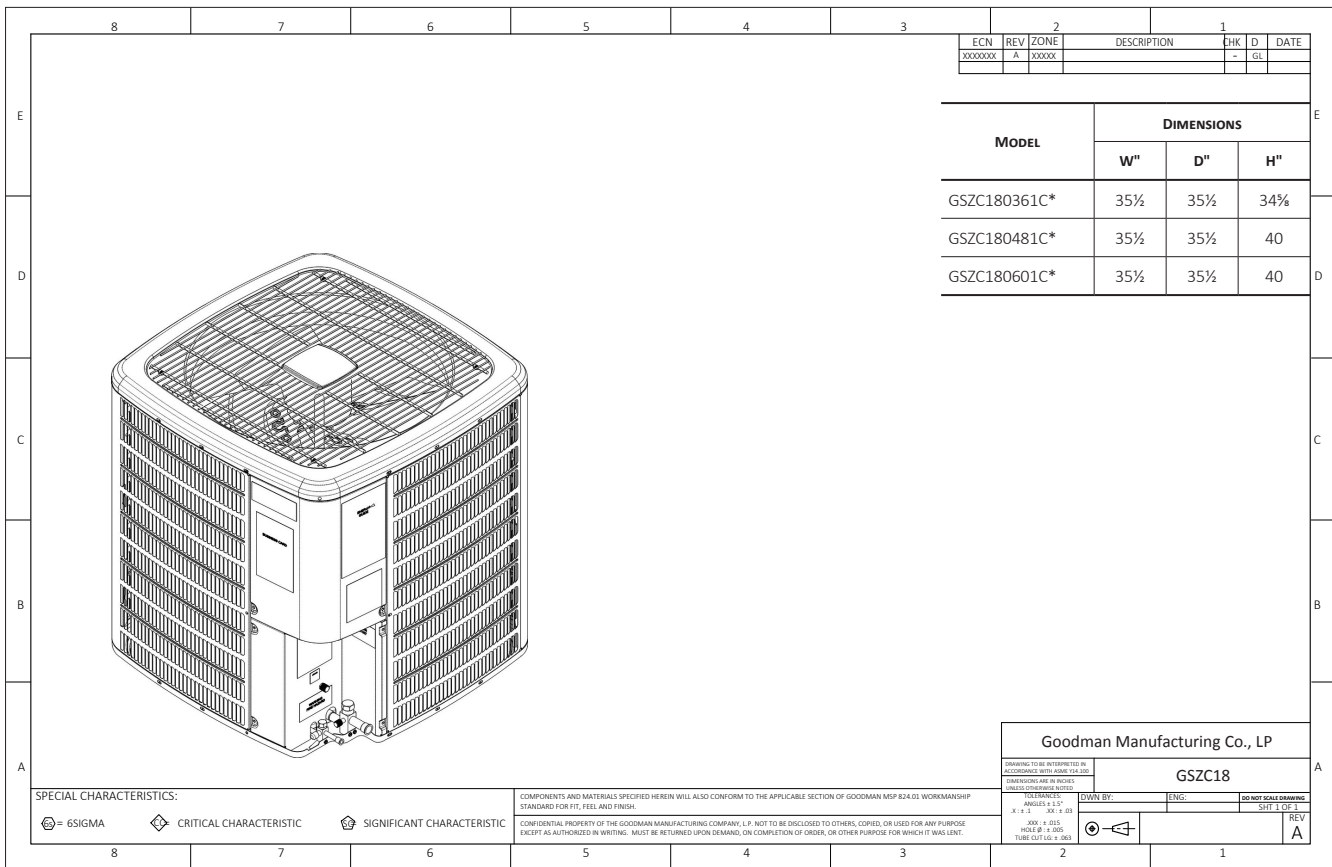

ACCESSORIES

MODEL	DESCRIPTION	GSZC18 036**	GSZC18 048**	GSZC18 060**
ABK-20	Anchor Bracket Kit*			
CSR-U-2	Hard-start Kit	X		
CSR-U-3	Hard-start Kit		X	X
FSK01A ²	Freeze Protection Kit	X	X	X
OT18-60A ³	Outdoor Thermostat/Lockout Thermostat	X	X	X
TX2N4	TXV Kit			
TX2N4A	TXV Kit			
TX3N4	TXV Kit	X		
TX5N4	TXV Kit		X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Available in 24V legacy mode only. This feature is integrated in the communicating mode.

² Installed on indoor coil

³ Available in 24V legacy mode only. This feature is integrated in the communicating mode. Required for heat pump applications where ambient temperature falls below 0 °F with 50% or higher relative humidity.

Note: Maximum number of installed accessories at the same time is limited by the size of the unit's control box.

DSZC18

PRODUCTION OF ALL DSZC18 MODELS CEASED ON DECEMBER 4, 2017, WHEN THOSE MODELS WERE REPLACED BY GSZC18 EQUIVALENTS. SPECIFICATION SHEETS FOR DSZC18 MODELS WILL CONTINUE TO BE AVAILABLE AT WWW.GOODMANMFG.COM UNTIL APRIL 1, 2018. AFTER THIS TIME THEY WILL BE AVAILABLE UPON REQUEST.



Air Conditioning & Heating

DSZC18

COOLING CAPACITY: 35,000 - 57,000 BTU/H
HEATING CAPACITY: 35,000 - 57,000 BTU/H

SPLIT SYSTEM HEAT PUMP UP TO 18 SEER & 9.5 HSPF



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
Expanded Heating Data.....	16
AHRI Ratings.....	18
Wiring Diagram.....	23
Dimensions.....	24
Accessories.....	24

Standard Features

- Two-Stage Copeland® UltraTech™ scroll compressor
- High-density foam compressor sound blanket
- ComfortNet™ Communications System compatible
- Expanded ComfortAlert diagnostics built in
- Set-up capable with two low-voltage wires to outdoor unit
- Diagnostic indicator lights and storage of six fault codes
- Color-coded terminal strip for non-communicating set-up
- SmartShift® technology with short-cycle protection to ensure quiet, reliable defrost
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- Factory-installed coil and ambient temperature sensors
- High- and low-pressure switches
- Quiet ECM-style condenser fan motor
- AHRI Certified; ETL Listed

Cabinet Features

- Goodman® brand sound control top design
- Heavy-gauge galvanized-steel cabinet
- Appliance-quality powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Baked-on powder paint finish
- Top and side maintenance access
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)






Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov.



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home), 10-Year Compressor Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

	D	S	Z	C	18	036	1	AA	
	1	2	3	4	5,6	7,8,9	10	11,12	
Brand	D Goodman® Brand High Feature Set								Engineering * Major/ Minor Revisions * Not used for order or inventory control
Product Category	S Split System								Electrical 1 - 208/230 V, 1 Phase, 60 Hz
Unit Type	X Condenser R-410A Z Heat Pump R-410A								Nominal Capacity 024 2 Tons 048 4 Tons 036 3 Tons 060 5 Tons
Communication Feature	C ComfortNet 4-wire communications ready								Efficiency 16 16 SEER 18 18 SEER 20 20 SEER

	DSZC18 0361A	DSZC18 0481A	DSZC18 0601B
COOLING CAPACITY			
Nominal Cooling (BTU/h)	35,000	47,000	57,000
Nominal Heating (BTU/h)	35,000	47,000	57,000
Decibels	72	73	75
COMPRESSOR			
RLA	15.3	21.2	28.8
LRA	83	104	152.9
CONDENSER FAN MOTOR			
Horsepower (RPM)	1/3	1/3	1/3
FLA	2.8	2.8	2.8
REFRIGERATION SYSTEM			
Refrigerant Line Size ¹			
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	1 1/8"	1 1/8"
Refrigerant Connection Size			
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	1 1/8"	1 1/8"
Valve Connection Type	Sweat	Sweat	Sweat
Refrigerant Charge	188	278	278
Expansion Device	TXV	TXV	TXV
Superheat at Service Valve	7-9°F	7-9°F	7-9°F
Subcooling at Service Valve			
High Stage	8-10°F	8-10°F	8-10°F
Low Stage	5-7°F	5-7°F	5-7°F
ELECTRICAL DATA			
Voltage-Phase-Hz	208/230-1-60	208/230-1-60	208/230-1-60
Minimum Circuit Ampacity ²	21.9	29.3	38.8
Max. Overcurrent Protection ³	35	50	60
Min / Max Volts	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
UNIT WEIGHTS			
Equipment Weight (lbs.)	246	308	314
Ship Weight (lbs)	268	330	336
ENERGY STAR CERTIFIED [^]			
			

[^] Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet ENERGY STAR requirements. See Page 18 for all ENERGY STAR-certified combinations as of this document's revision date.

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the rating plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil.
THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT, NOT THE INDOOR COIL.

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1350	MBh	35.0	36.3	39.8	-	34.2	35.5	38.9	-	33.4	34.6	37.9	-	32.6	33.8	37.0	-	31.0	32.1	35.2	-	28.7	29.7	32.6	-
		S/T	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.72	0.50	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		kW	1.85	1.89	1.96	-	2.01	2.05	2.13	-	2.14	2.20	2.27	-	2.27	2.32	2.40	-	2.37	2.43	2.51	-	2.46	2.52	2.61	-
		Amps	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-
	1200	Hi PR	209	225	237	-	234	252	266	-	266	287	303	-	303	326	345	-	341	367	388	-	377	406	429	-
		Lo PR	110	117	128	-	116	123	135	-	121	128	140	-	127	135	147	-	133	141	154	-	137	146	160	-
		MBh	34.0	35.3	38.6	-	33.2	34.4	37.7	-	32.4	33.6	36.8	-	31.6	32.8	35.9	-	30.1	31.2	34.1	-	27.8	28.9	31.6	-
		S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.47	-	0.83	0.69	0.48	-
		ΔT	19	16	12	-	19	16	12	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-
1050	kW	1.84	1.88	1.94	-	1.99	2.04	2.11	-	2.13	2.18	2.25	-	2.25	2.30	2.38	-	2.35	2.40	2.49	-	2.44	2.49	2.58	-	
	Amps	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	0.1	0.1	0.1	-	
	Hi PR	207	222	235	-	232	250	264	-	264	284	300	-	300	323	341	-	338	364	384	-	373	402	424	-	
	Lo PR	109	116	126	-	115	122	133	-	119	127	139	-	125	133	146	-	131	140	153	-	136	145	158	-	
	MBh	31.4	32.5	35.7	-	30.7	31.8	34.8	-	29.9	31.0	34.0	-	29.2	30.3	33.2	-	27.7	28.8	31.5	-	25.7	26.6	29.2	-	

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
75	1350	MBh	35.6	36.7	39.7	42.6	34.8	35.8	38.8	41.6	34.0	35.0	37.9	40.6	33.1	34.1	36.9	39.6	31.5	32.4	35.1	37.7	29.2	30.0	32.5	34.9
		S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.87	0.66	0.43	0.99	0.88	0.67	0.43
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10
		kW	1.87	1.91	1.98	2.05	2.03	2.07	2.14	2.22	2.16	2.22	2.29	2.37	2.29	2.34	2.42	2.51	2.39	2.45	2.53	2.63	2.48	2.54	2.63	2.73
		Amps	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	1200	Hi PR	211	227	240	250	237	255	269	280	269	290	306	319	306	330	348	363	345	371	392	409	381	410	433	452
		Lo PR	111	118	129	137	117	125	136	145	122	130	142	151	128	136	149	158	134	143	156	166	139	148	161	172
		MBh	34.6	35.6	38.5	41.4	33.8	34.8	37.7	40.4	33.0	34.0	36.8	39.4	32.2	33.1	35.9	38.5	30.6	31.5	34.1	36.6	28.3	29.2	31.6	33.9
		S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41
		ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
1050	kW	1.85	1.89	1.96	2.03	2.01	2.05	2.13	2.20	2.15	2.20	2.27	2.35	2.27	2.32	2.40	2.49	2.37	2.43	2.51	2.60	2.46	2.52	2.61	2.70	
	Amps	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
	Hi PR	209	225	237	247	234	252	266	278	266	287	303	316	303	327	345	360	341	367	388	405	377	406	429	447	
	Lo PR	110	117	128	136	116	124	135	144	121	128	140	149	127	135	147	157	133	141	154	164	137	146	160	170	
	MBh	31.9	32.9	35.6	38.2	31.2	32.1	34.8	37.3	30.4	31.3	33.9	36.4	29.7	30.6	33.1	35.5	28.2	29.0	31.4	33.7	26.1	26.9	29.1	31.3	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
70	1350	MBh	40.0	41.5	45.5	-	39.1	40.5	44.4	-	38.2	39.6	43.3	-	37.2	38.6	42.3	-	35.4	36.7	40.2	-	32.8	34.0	37.2	-	32.8	34.0	37.2	-	32.8	34.0	37.2	-															
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-															
		DT	20	17	13	-	20	18	13	-	20	18	13	-	20	18	13	-	20	17	13	-	19	16	12	-	19	16	12	-	19	16	12	-															
		kW	2.22	2.27	2.35	-	2.41	2.46	2.55	-	2.57	2.63	2.72	-	2.71	2.77	2.87	-	2.83	2.90	3.00	-	2.93	3.00	3.11	-	2.93	3.00	3.11	-	2.93	3.00	3.11	-															
		Amps	7.9	8.1	8.3	-	8.5	8.7	9.0	-	9.2	9.4	9.7	-	9.8	10.1	10.4	-	10.5	10.7	11.1	-	11.1	11.3	11.7	-	11.1	11.3	11.7	-	11.1	11.3	11.7	-															
	1200	Hi PR	206	222	234	-	231	249	263	-	263	283	299	-	300	322	340	-	337	363	383	-	372	401	423	-	372	401	423	-	372	401	423	-															
		Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	118	126	137	-	118	126	137	-	134	143	156	-	134	143	156	-	134	143	156	-															
		MBh	38.9	40.3	44.1	-	38.0	39.3	43.1	-	37.1	38.4	42.1	-	36.2	37.5	41.1	-	34.3	35.6	39.0	-	31.8	33.0	36.1	-	31.8	33.0	36.1	-	31.8	33.0	36.1	-															
		S/T	0.70	0.58	0.40	-	0.72	0.61	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-															
		DT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-	20	17	13	-	20	17	13	-															
1050	kW	2.21	2.26	2.33	-	2.39	2.44	2.52	-	2.55	2.60	2.69	-	2.69	2.75	2.84	-	2.81	2.87	2.97	-	2.91	2.98	3.08	-	2.91	2.98	3.08	-	2.91	2.98	3.08	-																
	Amps	7.8	8.0	8.3	-	8.4	8.6	8.9	-	9.1	9.4	9.7	-	9.8	10.0	10.3	-	10.4	10.6	11.0	-	11.0	11.2	11.6	-	11.0	11.2	11.6	-	11.0	11.2	11.6	-																
	Hi PR	204	220	232	-	229	246	260	-	260	280	296	-	297	319	337	-	334	359	379	-	369	397	419	-	369	397	419	-	369	397	419	-																
	Lo PR	106	112	124	-	112	120	131	-	117	124	136	-	117	124	136	-	123	131	143	-	129	137	149	-	129	137	149	-	129	137	149	-																
	MBh	35.9	37.2	40.7	-	35.0	36.3	39.8	-	34.2	35.5	38.8	-	33.4	34.6	37.9	-	31.7	32.9	36.0	-	29.4	30.4	33.3	-	29.4	30.4	33.3	-	29.4	30.4	33.3	-																

75	1350	MBh	40.7	41.9	45.4	48.7	39.8	40.9	44.3	47.6	38.8	40.0	43.3	46.4	37.9	39.0	42.2	45.3	36.0	37.0	40.1	43.0	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9	33.3	34.3	37.1	39.9
		S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42
		DT	23	21	17	12	23	22	18	12	23	22	18	12	23	22	18	12	23	21	18	12	23	21	16	11	23	21	16	11	23	21	16	11
		kW	2.24	2.29	2.37	2.45	2.43	2.48	2.57	2.66	2.59	2.65	2.74	2.84	2.73	2.80	2.89	3.00	2.85	2.92	3.02	3.13	2.96	3.03	3.14	3.25	2.96	3.03	3.14	3.25	2.96	3.03	3.14	3.25
		Amps	8.0	8.1	8.4	8.7	8.6	8.8	9.1	9.4	9.3	9.5	9.8	10.2	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.4	11.8	12.3	11.2	11.4	11.8	12.3	11.2	11.4	11.8	12.3
	1200	Hi PR	208	224	237	247	234	251	266	277	266	286	302	315	303	326	344	359	340	366	387	404	376	405	427	446	376	405	427	446	376	405	427	446
		Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	136	144	158	168	136	144	158	168
		MBh	39.5	40.7	44.0	47.3	38.6	39.7	43.0	46.2	37.7	38.8	42.0	45.1	36.8	37.9	41.0	44.0	34.9	36.0	38.9	41.8	32.4	33.3	36.1	38.7	32.4	33.3	36.1	38.7	32.4	33.3	36.1	38.7
		S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.82	0.62	0.40	0.90	0.81	0.62	0.40	0.91	0.82	0.62	0.40
		DT	24	22	18	13	24	22	18	13	24	22	18	13	25	23	19	13	24	22	18	13	23	21	17	12	23	21	17	12	23	21	17	12
1050	kW	2.23	2.28	2.35	2.43	2.41	2.46	2.55	2.63	2.57	2.63	2.72	2.81	2.71	2.77	2.87	2.97	2.83	2.90	3.00	3.10	2.93	3.00	3.11	3.22	2.93	3.00	3.11	3.22	2.93	3.00	3.11	3.22	
	Amps	7.9	8.1	8.3	8.6	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.1	9.8	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.3	11.7	12.2	11.1	11.3	11.7	12.2	11.1	11.3	11.7	12.2	
	Hi PR	206	222	234	244	231	249	263	274	263	283	299	312	300	322	341	355	337	363	383	400	372	401	423	441	372	401	423	441	372	401	423	441	
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166	134	143	156	166	134	143	156	166	
	MBh	36.5	37.6	40.7	43.6	35.6	36.7	39.7	42.6	34.8	35.8	38.8	41.6	33.9	34.9	37.8	40.6	32.2	33.2	35.9	38.6	29.9	30.7	33.3	35.7	29.9	30.7	33.3	35.7	29.9	30.7	33.3	35.7	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	2000	MBh	54.6	56.5	62.0	-	53.3	55.2	60.5	-	52.0	53.9	59.1	-	50.8	52.6	57.6	-	48.2	50.0	54.8	-	44.7	46.3	50.7	-
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-
		DT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
		kW	3.48	3.55	3.67	-	3.75	3.83	3.95	-	3.98	4.07	4.20	-	4.19	4.28	4.42	-	4.37	4.46	4.61	-	4.52	4.62	4.77	-
		Amps	13.0	13.3	13.8	-	14.1	14.4	14.9	-	15.3	15.7	16.2	-	16.4	16.8	17.4	-	17.5	17.9	18.5	-	18.5	19.0	19.7	-
	1800	Hi PR	206	222	235	-	232	249	263	-	263	283	299	-	300	323	341	-	338	363	384	-	373	401	424	-
		Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-
		MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-
		DT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-
1600	kW	3.46	3.53	3.65	-	3.73	3.81	3.93	-	3.96	4.05	4.18	-	4.17	4.26	4.40	-	4.34	4.44	4.58	-	4.49	4.59	4.75	-	
	Amps	12.9	13.2	13.7	-	14.0	14.3	14.8	-	15.2	15.6	16.1	-	16.3	16.7	17.3	-	17.4	17.8	18.4	-	18.4	18.9	19.5	-	
	Hi PR	205	221	233	-	230	248	261	-	262	282	297	-	298	321	339	-	335	361	381	-	370	399	421	-	
	Lo PR	106	112	123	-	112	119	130	-	116	123	135	-	122	130	142	-	128	136	148	-	132	141	154	-	
	MBh	51.1	52.9	58.0	-	49.9	51.7	56.6	-	48.7	50.5	55.3	-	47.5	49.2	53.9	-	45.1	46.8	51.2	-	41.8	43.3	47.5	-	

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
75	2000	MBh	55.5	57.1	61.8	66.4	54.2	55.8	60.4	64.8	52.9	54.5	59.0	63.3	51.6	53.1	57.5	61.7	49.0	50.5	54.6	58.6	45.4	46.8	50.6	54.3
		S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42
		DT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
		kW	3.51	3.58	3.70	3.81	3.78	3.86	3.98	4.11	4.02	4.10	4.24	4.38	4.23	4.32	4.46	4.61	4.40	4.50	4.65	4.81	4.56	4.66	4.82	4.98
		Amps	13.1	13.4	13.9	14.4	14.2	14.6	15.1	15.6	15.5	15.9	16.4	17.0	16.6	17.0	17.5	18.2	17.6	18.1	18.7	19.4	18.7	19.2	19.8	20.6
	1800	Hi PR	209	224	237	247	234	252	266	277	266	286	302	315	303	326	344	359	341	367	387	404	377	405	428	447
		Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
		MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8	44.7	46.1	49.9	53.5
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40
		DT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11
1600	kW	3.49	3.56	3.67	3.79	3.76	3.84	3.96	4.09	3.99	4.08	4.21	4.35	4.20	4.29	4.43	4.58	4.38	4.48	4.62	4.78	4.53	4.63	4.79	4.95	
	Amps	13.0	13.4	13.8	14.3	14.1	14.5	15.0	15.5	15.4	15.7	16.3	16.9	16.4	16.9	17.4	18.1	17.5	18.0	18.6	19.3	18.6	19.1	19.7	20.5	
	Hi PR	207	223	235	245	232	250	264	275	264	284	300	313	301	324	342	357	339	364	385	401	374	403	425	443	
	Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	
	MBh	51.9	53.5	57.9	62.1	50.7	52.2	56.5	60.7	49.5	51.0	55.2	59.2	48.3	49.7	53.8	57.8	45.9	47.3	51.1	54.9	42.5	43.8	47.4	50.8	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

DSZC180361A* / CA*F3642C6A*+TXV/ MBE1600**-1 — HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	44.5	42.2	39.7	37.1	35.4	34.3	31.9	29.4	27.5	25.4	23.4	22.0	21.2	19.1	16.9	14.7	12.6	10.3
ΔT	33.0	31.2	29.4	27.5	26.2	25.4	23.6	21.8	20.4	18.8	17.3	16.3	15.7	14.1	12.5	10.9	9.3	7.6
kW	2.81	2.75	2.69	2.63	2.6	2.57	2.52	2.46	2.43	2.37	2.32	2.28	2.26	2.20	2.14	2.08	2.02	1.97
Amps	12.8	11.8	11.1	10.4	10.0	9.8	9.2	8.7	8.3	8.0	7.6	7.4	7.3	6.9	6.4	6.0	5.5	4.9
COP	4.64	4.49	4.32	4.12	3.99	3.90	3.71	3.50	3.30	3.13	2.95	2.83	2.75	2.54	2.31	2.07	1.82	1.53
EER	15.9	15.3	14.8	14.1	13.6	13.3	12.7	12.0	11.3	10.7	10.1	9.7	9.4	8.7	7.9	7.1	6.2	5.2

DSZC180361A* / CA*F3642C6A*+TXV/ MBE1600**-1 — LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.8	29.2	27.4	25.6	24.5	23.7	22.0	20.3	18.0	16.6	15.3	14.5	13.9	12.5	11.1	9.7	8.3	6.8
ΔT	33.5	31.8	29.9	27.9	26.7	25.9	24.0	22.1	19.6	18.1	16.7	15.8	15.2	13.6	12.1	10.5	9.0	7.4
kW	1.98	1.94	1.90	1.86	1.8	1.81	1.77	1.73	1.78	1.74	1.69	1.67	1.65	1.60	1.56	1.51	1.47	1.42
Amps	9.5	8.8	8.2	7.7	7.5	7.3	6.9	6.5	6.2	6.0	5.7	5.5	5.5	5.2	4.8	4.5	4.2	3.7
COP	4.54	4.39	4.23	4.04	3.91	3.83	3.64	3.44	2.96	2.81	2.65	2.54	2.48	2.28	2.08	1.87	1.64	1.39
EER	15.5	15.0	14.4	13.8	13.4	13.1	12.4	11.7	10.1	9.6	9.1	8.7	8.5	7.8	7.1	6.4	5.6	4.7

DSZC180481A* / CA*F4860*6A*+TXV/ MBE2000**-1 — HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	62.2	58.9	55.4	51.8	49.5	48.0	44.6	41.1	38.9	35.9	33.0	31.2	30.0	27.0	23.9	20.8	17.8	14.6
ΔT	32.9	31.2	29.3	27.4	26.2	25.4	23.6	21.7	20.6	19.0	17.5	16.5	15.9	14.3	12.6	11.0	9.4	7.7
kW	3.80	3.72	3.64	3.56	3.5	3.49	3.41	3.33	3.28	3.20	3.12	3.07	3.04	2.96	2.89	2.81	2.73	2.66
Amps	17.0	15.7	14.7	13.8	13.2	13.0	12.2	11.5	11.0	10.5	10.0	9.7	9.6	9.1	8.4	7.9	7.2	6.4
COP	4.80	4.64	4.46	4.26	4.12	4.03	3.82	3.61	3.47	3.29	3.10	2.97	2.89	2.66	2.42	2.17	1.90	1.61
EER	16.4	15.8	15.2	14.5	14.1	13.8	13.1	12.3	11.9	11.2	10.6	10.2	9.9	9.1	8.3	7.4	6.5	5.5

DSZC180481A* / CA*F4860*6A*+TXV/ MBE2000**-1 — LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	43.8	41.4	39.0	36.5	34.8	33.7	31.3	28.9	27.0	25.0	23.0	21.7	20.9	18.7	16.6	14.5	12.4	10.1
ΔT	33.8	32.0	30.1	28.1	26.9	26.0	24.2	22.3	20.9	19.3	17.7	16.7	16.1	14.5	12.8	11.2	9.5	7.8
kW	2.67	2.62	2.56	2.50	2.5	2.44	2.39	2.33	2.44	2.38	2.32	2.28	2.26	2.19	2.13	2.07	2.01	1.95
Amps	12.7	11.7	10.9	10.2	9.8	9.6	9.0	8.5	8.1	7.7	7.2	7.0	6.9	6.5	6.0	5.6	5.1	4.5
COP	4.79	4.63	4.46	4.27	4.13	4.04	3.84	3.63	3.24	3.07	2.90	2.78	2.71	2.50	2.28	2.05	1.80	1.52
EER	16.4	15.8	15.2	14.6	14.1	13.8	13.1	12.4	11.1	10.5	9.9	9.5	9.3	8.5	7.8	7.0	6.2	5.2

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

DSZC180601B* / CAPF4961D6 / MBVC2000A — HIGH STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	71.0	67.2	63.3	59.2	56.5	54.7	50.9	46.9	43.6	40.3	37.1	35.0	33.7	30.2	26.8	23.4	20.0	16.3
ΔT	36.5	34.6	32.6	30.4	29.1	28.2	26.2	24.1	22.4	20.7	19.1	18.0	17.3	15.6	13.8	12.0	10.3	8.4
kW	4.57	4.48	4.39	4.30	4.2	4.21	4.12	4.03	4.52	4.41	4.31	4.24	4.20	4.09	3.99	3.88	3.77	3.67
Amps	21.4	19.8	18.5	17.3	16.7	16.4	15.4	14.6	14.0	13.3	12.6	12.3	12.2	11.5	10.7	10.1	9.3	8.3
COP	4.55	4.39	4.22	4.03	3.90	3.81	3.61	3.41	2.82	2.67	2.52	2.41	2.35	2.16	1.97	1.76	1.55	1.30
EER	15.5	15.0	14.4	13.8	13.3	13.0	12.3	11.6	9.6	9.1	8.6	8.2	8.0	7.4	6.7	6.0	5.3	4.5

DSZC180601B* / CAPF4961D6 / MBVC2000A — LOW STAGE

	OUTDOOR AMBIENT TEMPERATURE																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	49.8	47.1	44.4	41.5	39.6	38.4	35.6	32.9	29.8	27.5	25.3	23.9	23.0	20.7	18.3	16.0	13.6	11.2
ΔT	38.4	36.4	34.2	32.0	30.6	29.6	27.5	25.4	23.0	21.2	19.5	18.5	17.8	15.9	14.1	12.3	10.5	8.6
kW	3.41	3.33	3.26	3.19	3.1	3.12	3.05	2.97	3.37	3.28	3.20	3.15	3.11	3.03	2.94	2.86	2.77	2.69
Amps	16.8	15.6	14.6	13.7	13.2	12.9	12.2	11.6	11.1	10.6	10.1	9.8	9.7	9.2	8.6	8.0	7.4	6.7
COP	4.28	4.14	3.98	3.81	3.68	3.60	3.42	3.24	2.59	2.45	2.32	2.22	2.17	2.00	1.82	1.64	1.44	1.22
EER	14.6	14.1	13.6	13.0	12.6	12.3	11.7	11.1	8.8	8.4	7.9	7.6	7.4	6.8	6.2	5.6	4.9	4.2

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power



ENERGY STAR-CERTIFIED COMBINATIONS [^]

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^{>}				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
DSZC18 0361A*	CA*F3743*6D*+MBVC1600**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	35,000	9.50	20,400	1,250	4415195
DSZC18 0481A*	CA*F4961*6D*+MBVC2000**-1A*+TXV		47,500	35,600	18.0	13.0	44,000	35,200	47,500	9.50	29,600	1,750	4431905
DSZC18 0601B*	CA*F4961*6D*+MBVC2000**-1A*+TXV		56,500	40,000	17.0	12.6	52,500	41,000	56,500	9.30	35,000	1,800	4514555

[^] Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR[®] criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet ENERGY STAR requirements.

> Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240

⁵ HSPF = Heating Seasonal Performance Factor

⁶ Heating capacity at 17°F outdoor

⁷ CFM at High stage

⁸ CFM at Intermediate and low stage

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman brand gas furnace contains the EEP cooling time delay.

OTHER AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	Hi ⁴	HSPF ⁵	Low ⁶		
DSZC18 0361A*	AVPTC37D14A*		35,000	26,600	17.5	12.5	32,400	26,200	35,000	9.5	20,400	1,245	8996215
	AVPTC42D14A*		35,000	26,600	17.5	12.5	32,400	26,200	35,000	9.3	20,400	1,200	5933262
	AVPTC48D14A*		36,000	27,400	17.5	12.5	33,400	27,000	35,000	9.3	20,400	1,200	5933263
	CA*F3743*6D*+MBVC2000**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	34,800	9.3	20,400	1,250	4415237
	CA*F3743*6D*+TXV	G*VC80803B*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,150	9924188
	CA*F3743*6D*+TXV	G*VC80804C*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,250	9924191
	CA*F3743*6D*+TXV	G*VC80805D*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924194
	CA*F3743*6D*+TXV	G*VC80604B*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,260	5038606
	CA*F3743*6D*+TXV	G*VC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038668
	CA*F3743*6D*+TXV	A*VC80604B*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,260	5038728
	CA*F3743*6D*+TXV	A*VC80603B*B*	34,600	26,200	17.4	12.5	32,000	26,000	34,800	9.3	20,000	1,170	5038755
	CA*F3743*6D*+TXV	A*VC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038773
	CA*F3743*6D*+TXV	ADVC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,250	5038802
	CA*F3743*6D*+TXV	A*VC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498129
	CA*F3743*6D*+TXV	ADVC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,230	6498140
	CA*F3743*6D*+TXV	G*VC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498141
	CA*F3743*6D*+TXV	G*VC960403BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360734
	CA*F3743*6D*+TXV	G*VC960603BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360738
	CA*F3743*6D*+TXV	G*VC960803BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360742
	CA*F3743*6D*+TXV	G*VC960804CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360747
CA*F3743*6D*+TXV	G*VC961005CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360753	
CA*F3743*6D*+TXV	G*VM970603BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360770	

See Notes on Page 21.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS ^				TVA RATINGS ^3		HEATING RATINGS ^			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ^1	EER ^2	TOTAL	SENS.	HI ^4	HSPF ^5	LOW ^6		
DSZC18 0361A* (cont.)	CA*F3743*6D*+TXV	G*VM970803BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360776
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360781
	CA*F3743*6D*+TXV	G*VM971005CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360787
	CA*F3743*6D*+TXV	A*VC960403BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360800
	CA*F3743*6D*+TXV	A*VC960603BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360804
	CA*F3743*6D*+TXV	A*VC960803BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360808
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360812
	CA*F3743*6D*+TXV	A*VC961005CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360816
	CA*F3743*6D*+TXV	A*VM970603BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360828
	CA*F3743*6D*+TXV	A*VM970803BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360832
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360836
	CA*F3743*6D*+TXV	A*VM971005CNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360840
	CA*F3743*6D*+TXV	G*EC960603BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,215	7368191
	CA*F3743*6D*+TXV	G*EC960803BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,275	7368195
	CA*F3743*6D*+TXV	A*EC960603BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,215	7368205
	CA*F3743*6D*+TXV	A*EC960803BNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,275	7368209
	CA*F4860*6D*+TXV	G*VC80805D*B*	35,000	27,200	17.5	12.5	33,800	26,600	34,800	9.3	20,000	1,200	9924195
	CA*F4860*6D*+TXV	G*VC80805C*B*	35,000	26,600	17.5	12.5	32,400	26,200	34,800	9.3	20,000	1,250	5038698
	CA*F4860*6D*+TXV	ADVC80805C*B*	35,000	26,600	17.5	12.5	32,400	26,200	35,000	9.3	20,000	1,250	5038785
	CA*F4860*6D*+TXV	A*VC80805C*B*	35,000	26,600	17.5	12.5	32,400	26,200	34,800	9.3	20,000	1,250	5038794
	CA*F4961*6D*+MBVC1600**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	35,000	9.5	20,000	1,250	4431891
	CA*F4961*6D*+MBVC2000**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	35,000	9.3	20,400	1,250	4431892
	CA*F4961*6D*+TXV	G*VC80603B*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924186
	CA*F4961*6D*+TXV	G*VC80803B*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,150	9924189
	CA*F4961*6D*+TXV	G*VC80804C*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,250	9924192
	CA*F4961*6D*+TXV	G*VC80805D*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924196
	CA*F4961*6D*+TXV	G*VC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038607
	CA*F4961*6D*+TXV	G*VC80604B*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,260	5038699
	CA*F4961*6D*+TXV	A*VC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038729
	CA*F4961*6D*+TXV	ADVC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,250	5038730
	CA*F4961*6D*+TXV	A*VC80604B*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,260	5038795
	CA*F4961*6D*+TXV	A*VC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498142
	CA*F4961*6D*+TXV	ADVC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,230	6498153
	CA*F4961*6D*+TXV	G*VC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498154
	CA*F4961*6D*+TXV	G*VC960403BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360735
	CA*F4961*6D*+TXV	G*VC960603BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360739
	CA*F4961*6D*+TXV	G*VC960803BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360743
	CA*F4961*6D*+TXV	G*VC960804CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360748
	CA*F4961*6D*+TXV	G*VC961005CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360754
	CA*F4961*6D*+TXV	G*VM970603BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360771
	CA*F4961*6D*+TXV	G*VM970803BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360777
	CA*F4961*6D*+TXV	G*VM970804CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360782
	CA*F4961*6D*+TXV	G*VM971005CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360788
	CA*F4961*6D*+TXV	A*VC960403BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360801
	CA*F4961*6D*+TXV	A*VC960603BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360805
	CA*F4961*6D*+TXV	A*VC960803BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360809
	CA*F4961*6D*+TXV	A*VC960804CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360813
	CA*F4961*6D*+TXV	A*VC961005CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360817
CA*F4961*6D*+TXV	A*VM970603BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360829	
CA*F4961*6D*+TXV	A*VM970803BNA*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360833	
CA*F4961*6D*+TXV	A*VM970804CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360837	
CA*F4961*6D*+TXV	A*VM971005CNA*	35,000	26,600	17.0	12.5	32,400	26,200	36,000	9.0	20,000	1,200	7360841	
CA*F4961*6D*+TXV	G*EC960603BNA*	35,000	26,600	17.0	12.5	32,400	26,200	35,000	9.0	20,000	1,215	7368192	

See Notes on Page 21.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI ⁴	HSPF ⁵	LOW ⁶		
DSZC18 0361A* (cont.)	CA*F4961*6D*+TXV	G*EC960803BNA*	35,000	26,600	17.0	12.5	32,400	26,200	35,000	9.0	20,000	1,275	7368196
	CA*F4961*6D*+TXV	A*EC960603BNA*	35,000	26,600	17.0	12.5	32,400	26,200	35,000	9.0	20,000	1,215	7368206
	CA*F4961*6D*+TXV	A*EC960803BNA*	35,000	26,600	17.0	12.5	32,400	26,200	35,000	9.0	20,000	1,275	7368210
	CHPF3743C6B*+MBVC1600**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	35,000	9.5	20,400	1,250	3654787
	CHPF3743C6B*+TXV	G*VC80603B*B*	34,600	26,800	17.0	12.5	33,400	26,200	34,800	9.3	20,000	1,100	9924187
	CHPF3743C6B*+TXV	G*VC80803B*B*	34,600	26,800	17.0	12.5	33,400	26,200	34,800	9.3	20,000	1,150	9924190
	CHPF3743C6B*+TXV	G*VC80804C*B*	34,600	26,800	17.0	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924193
	CHPF3743C6B*+TXV	G*VC80805D*B*	34,600	26,800	17.0	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924197
	CHPF3743C6B*+TXV	G*VC80805C*B*	34,600	26,200	17.0	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038683
	CHPF3743C6B*+TXV	G*VC80604B*B*	34,600	26,200	17.0	12.5	32,000	26,000	34,800	9.3	20,000	1,260	5038711
	CHPF3743C6B*+TXV	A*VC80805C*B*	34,600	26,200	17.0	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038786
	CHPF3743C6B*+TXV	A*VC80604B*B*	34,600	26,200	17.0	12.5	32,000	26,000	34,800	9.3	20,000	1,260	5038803
	CHPF3743C6B*+TXV	A*VC81005C*B*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498155
	CHPF3743C6B*+TXV	G*VC81005C*B*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498159
	CHPF3743C6B*+TXV	G*VC960403BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360736
	CHPF3743C6B*+TXV	G*VC960603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360740
	CHPF3743C6B*+TXV	G*VC960803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360744
	CHPF3743C6B*+TXV	G*VC960804CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360750
	CHPF3743C6B*+TXV	G*VC961005CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360756
	CHPF3743C6B*+TXV	G*VM970603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360773
	CHPF3743C6B*+TXV	G*VM970803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360778
	CHPF3743C6B*+TXV	G*VM970804CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360784
	CHPF3743C6B*+TXV	G*VM971005CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360789
	CHPF3743C6B*+TXV	A*VC960403BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360802
	CHPF3743C6B*+TXV	A*VC960603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360806
	CHPF3743C6B*+TXV	A*VC960803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360810
	CHPF3743C6B*+TXV	A*VC960804CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360814
	CHPF3743C6B*+TXV	A*VC961005CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360818
	CHPF3743C6B*+TXV	A*VM970603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360830
	CHPF3743C6B*+TXV	A*VM970803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360834
	CHPF3743C6B*+TXV	A*VM970804CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360838
	CHPF3743C6B*+TXV	A*VM971005CNA*	34,600	26,200	16.5	12.5	32,000	26,000	35,000	9.0	20,000	1,200	7360842
	CHPF3743C6B*+TXV	G*EC960603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,215	7368193
	CHPF3743C6B*+TXV	G*EC960803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,275	7368197
	CHPF3743C6B*+TXV	A*EC960603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,215	7368207
	CHPF3743C6B*+TXV	A*EC960803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,275	7368211
	CHPF3743D6B*+MBVC2000**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	35,000	9.3	20,000	1,250	3654803
	CHPF3743D6B*+TXV	G*VC80805D*B*	34,600	26,800	17.0	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924377
	CHPF3743D6B*+TXV	G*VC80805C*B*	34,600	26,200	17.0	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038628
	CHPF3743D6B*+TXV	A*VC80805C*B*	34,600	26,200	17.0	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038746
	CHPF3743D6B*+TXV	A*VC81005C*B*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498160
	CHPF3743D6B*+TXV	G*VC81005C*B*	34,600	26,200	17.0	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498169
CHPF4860D6D*+MBVC2000**-1A*+TXV		35,000	26,600	18.0	13.0	32,400	26,200	35,000	9.3	20,000	1,250	3654817	
CHPF4860D6D*+TXV	G*VC80805D*B*	34,600	26,800	17.5	12.5	33,400	26,200	34,800	9.3	20,000	1,200	9924198	
CHPF4860D6D*+TXV	G*VC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038712	
CHPF4860D6D*+TXV	A*VC80805C*B*	34,600	26,200	17.5	12.5	32,000	26,000	34,800	9.3	20,000	1,250	5038804	
CHPF4860D6D*+TXV	A*VC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498170	
CHPF4860D6D*+TXV	G*VC81005C*B*	34,600	26,200	17.5	12.5	32,000	26,000	35,000	9.3	20,000	1,210	6498179	
CHPF4860D6D*+TXV	G*VC960403BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360737	
CHPF4860D6D*+TXV	G*VC960603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360741	
CHPF4860D6D*+TXV	G*VC960803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360745	
CHPF4860D6D*+TXV	G*VC960804CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360751	
CHPF4860D6D*+TXV	G*VC961005CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360757	

See Notes on Page 21.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI ⁴	HSPF ⁵	LOW ⁶		
DSZC18 0361A* (cont.)	CHPF4860D6D*+TXV	G*VM970603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360774
	CHPF4860D6D*+TXV	G*VM970803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360780
	CHPF4860D6D*+TXV	G*VM970804CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360785
	CHPF4860D6D*+TXV	G*VM971005CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360791
	CHPF4860D6D*+TXV	A*VC960403BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360803
	CHPF4860D6D*+TXV	A*VC960603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360807
	CHPF4860D6D*+TXV	A*VC960803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360811
	CHPF4860D6D*+TXV	A*VC960804CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360815
	CHPF4860D6D*+TXV	A*VC961005CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360819
	CHPF4860D6D*+TXV	A*VM970603BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360831
	CHPF4860D6D*+TXV	A*VM970803BNA*	34,600	26,200	16.5	12.0	32,000	26,000	35,000	9.0	20,000	1,200	7360835
	CHPF4860D6D*+TXV	A*VM970804CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360839
	CHPF4860D6D*+TXV	A*VM971005CNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,200	7360843
	CHPF4860D6D*+TXV	G*EC960603BNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,215	7368194
	CHPF4860D6D*+TXV	G*EC960803BNA*	35,000	26,600	17.0	12.5	32,400	26,200	35,000	9.0	20,000	1,275	7368198
	CHPF4860D6D*+TXV	A*EC960603BNA*	35,000	26,600	16.5	12.0	32,400	26,200	35,000	9.0	20,000	1,215	7368208
	CHPF4860D6D*+TXV	A*EC960803BNA*	35,000	26,600	17.0	12.5	32,400	26,200	35,000	9.0	20,000	1,275	7368212
DSZC18 0481A*	AVPTC48D14A*		47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,700	5933264
	AVPTC61D14A*		46,500	35,000	17.5	12.0	43,000	34,400	47,000	9.5	29,000	1,610	8996216
	CA*F4961*6D*+MBVC1600**-1A*+TXV		47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,750	4431904
	CA*F4961*6D*+TXV	G*VC80805D*B*	47,000	37,600	17.5	12.5	45,500	36,600	47,000	9.3	29,000	1,500	9924199
	CA*F4961*6D*+TXV	A*VC80805C*B*	47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,590	6498189
	CA*F4961*6D*+TXV	A*VC81005C*B*	47,000	35,400	17.0	12.2	43,500	34,800	47,000	9.3	29,000	1,610	6498190
	CA*F4961*6D*+TXV	ADVC80805C*B*	47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,580	6498198
	CA*F4961*6D*+TXV	ADVC81005C*B*	47,000	35,400	17.0	12.2	43,500	34,800	47,000	9.3	29,000	1,620	6498199
	CA*F4961*6D*+TXV	G*VC80805C*B*	47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,590	6498200
	CA*F4961*6D*+TXV	G*VC81005C*B*	47,000	35,400	17.0	12.2	43,500	34,800	47,000	9.3	29,000	1,610	6498201
	CA*F4961*6D*+TXV	G*VC960804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360758
	CA*F4961*6D*+TXV	G*VC961005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360761
	CA*F4961*6D*+TXV	G*VM970804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360792
	CA*F4961*6D*+TXV	G*VM971005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360794
	CA*F4961*6D*+TXV	A*VC960804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360820
	CA*F4961*6D*+TXV	A*VC961005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360822
	CA*F4961*6D*+TXV	A*VM970804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360844
	CA*F4961*6D*+TXV	A*VM971005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360846
	CA*F4961*6D*+TXV	G*VC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,600	7360852
	CA*F4961*6D*+TXV	A*VC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,600	7360854
	CA*F4961*6D*+TXV	G*EC961004CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,500	7368199
	CA*F4961*6D*+TXV	G*EC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,650	7368201
	CA*F4961*6D*+TXV	A*EC961004CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,500	7368213
	CA*F4961*6D*+TXV	A*EC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,650	7368215
	CHPF4860D6D*+MBVC2000**-1A*+TXV		47,500	35,600	18.0	13.0	44,000	35,200	47,500	9.5	29,600	1,750	3654899
	CHPF4860D6D*+TXV	G*VC80805D*B*	47,000	37,600	17.5	12.5	45,500	36,600	47,000	9.3	29,000	1,500	9924200
	CHPF4860D6D*+TXV	A*VC80805C*B*	47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,590	5265340
	CHPF4860D6D*+TXV	A*VC81005C*B*	47,000	35,400	17.0	12.2	43,500	34,800	47,000	9.3	29,000	1,610	5265341
	CHPF4860D6D*+TXV	G*VC80805C*B*	47,000	35,400	17.5	12.5	43,500	34,800	47,000	9.3	29,000	1,590	6498209
	CHPF4860D6D*+TXV	G*VC81005C*B*	47,000	35,400	17.0	12.2	43,500	34,800	47,000	9.3	29,000	1,610	6498210
	CHPF4860D6D*+TXV	G*VC960804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360760
	CHPF4860D6D*+TXV	G*VC961005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360763
	CHPF4860D6D*+TXV	G*VM970804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360793
CHPF4860D6D*+TXV	G*VM971005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360795	
CHPF4860D6D*+TXV	A*VC960804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360821	
CHPF4860D6D*+TXV	A*VC961005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360823	

See Notes on Page 21.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS [^]				TVA RATINGS ³		HEATING RATINGS [^]			CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL	SENS.	SEER ¹	EER ²	TOTAL	SENS.	HI ⁴	HSPF ⁵	LOW ⁶		
DSZC18 0481A* (cont.)	CHPF4860D6D*+TXV	A*VM970804CNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,500	7360845
	CHPF4860D6D*+TXV	A*VM971005CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,530	7360847
	CHPF4860D6D*+TXV	G*VC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,600	7360853
	CHPF4860D6D*+TXV	A*VC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,600	7360855
	CHPF4860D6D*+TXV	G*EC961004CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,500	7368200
	CHPF4860D6D*+TXV	G*EC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,650	7368202
	CHPF4860D6D*+TXV	A*EC961004CNA*	47,000	35,400	16.5	12.0	43,500	34,800	47,000	9.0	29,000	1,500	7368214
	CHPF4860D6D*+TXV	A*EC961205DNA*	47,000	35,400	17.0	12.5	43,500	34,800	47,000	9.0	29,000	1,650	7368216
DSZC18 0601B*	AVPTC60D14A*		56,000	40,000	16.5	12.0	52,000	40,500	56,000	9.0	34,600	1,800	5933265
	AVPTC61D14A*		55,000	39,000	16.5	12.2	51,000	40,000	56,000	9.5	34,600	1,800	8996217
	CA*F4961*6D*+TXV	G*VC81005C*B*	55,500	39,500	16.7	12.0	51,500	40,000	56,000	9.3	34,600	1,800	5038644
	CA*F4961*6D*+TXV	G*VC80805D*B*	55,500	41,500	16.7	12.0	53,500	40,500	55,500	9.0	34,400	1,700	9924201
	CA*F4961*6D*+TXV	G*VC80805C*B*	55,500	39,500	16.7	12.0	51,500	40,000	55,500	9.3	34,400	1,590	5038700
	CA*F4961*6D*+TXV	A*VC81005C*B*	55,500	39,500	16.7	12.0	51,500	40,000	56,000	9.3	34,600	1,800	5038758
	CA*F4961*6D*+TXV	ADVC81005C*B*	55,500	39,500	16.5	12.0	51,500	40,000	56,000	9.3	34,600	1,820	5038774
	CA*F4961*6D*+TXV	A*VC80805C*B*	55,500	39,500	16.7	12.0	51,500	40,000	55,500	9.3	34,400	1,590	5038796
	CA*F4961*6D*+TXV	ADVC80805C*B*	55,500	39,500	16.5	12.0	51,500	40,000	55,500	9.3	34,400	1,580	5038797
	CA*F4961*6D*+TXV	G*VC961005CNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360764
	CA*F4961*6D*+TXV	G*VC961205DNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360767
	CA*F4961*6D*+TXV	G*VM971005CNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360796
	CA*F4961*6D*+TXV	A*VC961005CNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360824
	CA*F4961*6D*+TXV	A*VC961205DNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360826
	CA*F4961*6D*+TXV	A*VM971005CNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360848
	CA*F4961*6D*+TXV	G*VM971205DNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7364851
	CA*F4961*6D*+TXV	A*VM971205DNA*	55,000	39,000	16.0	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7364853
	CA*F4961*6D*+TXV	G*EC961205DNA*	55,500	39,500	16.0	12.0	51,500	40,000	56,000	9.0	34,000	1,650	7368203
	CA*F4961*6D*+TXV	A*EC961205DNA*	55,500	39,500	16.0	12.0	51,500	40,000	56,000	9.0	34,000	1,650	7368217
	CHPF4860D6D*+MBVC2000*-1A*+TXV		55,500	39,500	17.0	12.8	51,500	40,000	55,500	9.3	34,000	1,600	4236556
	CHPF4860D6D*+TXV	G*VC80805D*B*	55,500	41,500	16.5	12.0	53,500	40,500	55,500	9.0	34,200	1,700	9924202
	CHPF4860D6D*+TXV	G*VC81005C*B*	55,000	39,000	16.9	12.0	51,000	40,000	56,000	9.3	34,400	1,800	5038608
	CHPF4860D6D*+TXV	G*VC80805C*B*	55,500	39,500	16.5	12.0	51,500	40,000	55,500	9.3	34,200	1,590	5038713
	CHPF4860D6D*+TXV	A*VC81005C*B*	55,000	39,000	16.9	12.0	51,000	40,000	56,000	9.3	34,400	1,800	5038731
	CHPF4860D6D*+TXV	A*VC80805C*B*	55,500	39,500	16.5	12.0	51,500	40,000	55,500	9.3	34,200	1,590	5038806
	CHPF4860D6D*+TXV	G*VC961005CNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360766
	CHPF4860D6D*+TXV	G*VC961205DNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360769
	CHPF4860D6D*+TXV	G*VM971005CNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360797
	CHPF4860D6D*+TXV	A*VC961005CNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360825
	CHPF4860D6D*+TXV	A*VC961205DNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360827
	CHPF4860D6D*+TXV	A*VM971005CNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7360849
	CHPF4860D6D*+TXV	G*VM971205DNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7364852
CHPF4860D6D*+TXV	A*VM971205DNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,600	7364854	
CHPF4860D6D*+TXV	G*EC961205DNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,650	7368204	
CHPF4860D6D*+TXV	A*EC961205DNA*	55,000	39,000	15.5	12.0	51,000	40,000	56,000	9.0	34,000	1,650	7368218	

[^] Rated in accordance with ANSI/AHRI Standard 210/240

¹ Seasonal Energy Efficiency Ratio

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁵ HSPF = Heating Seasonal Performance Factor

⁷ CFM at High stage

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F


⁴ Rated heating capacity at 47°F outdoor per AHRI 210/240

⁶ Heating capacity at 17°F outdoor


⁸ CFM at Intermediate and low stage

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching outdoor unit to indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman brand gas furnace contains the EEP cooling time delay.

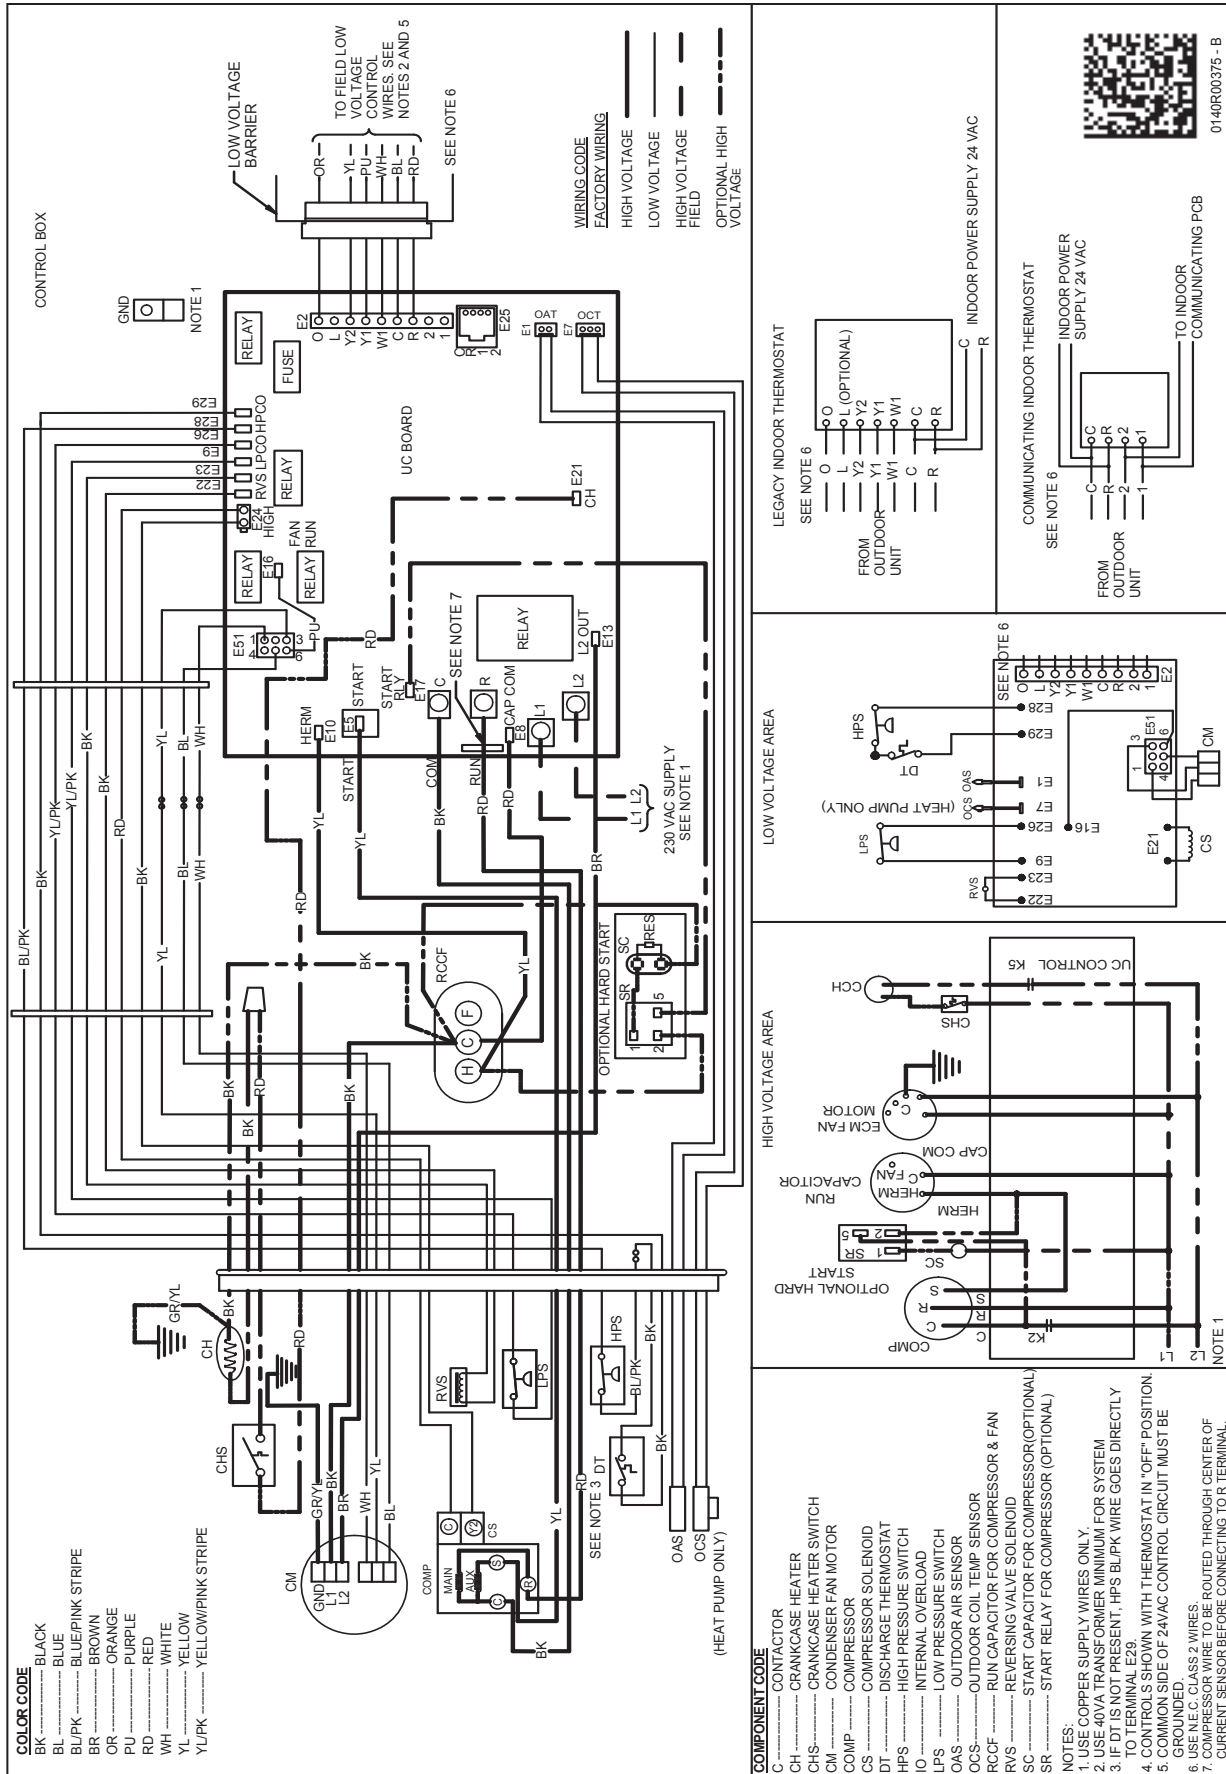

DIMENSIONS

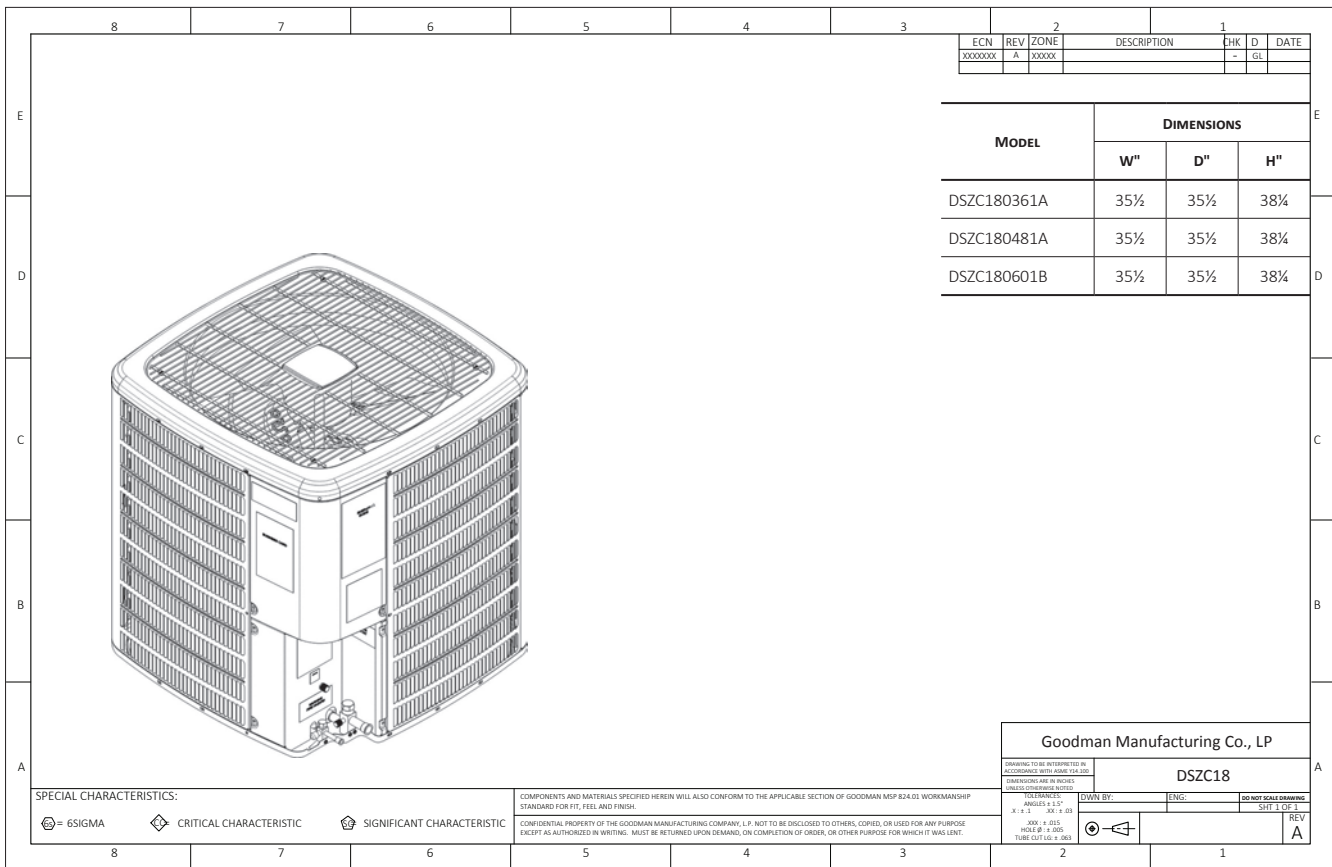

ACCESSORIES

MODEL	DESCRIPTION	DSZC18 036**	DSZC18 048**	DSZC18 060**
ABK-20	Anchor Bracket Kit*			
B1141643 ¹	24V Transformer	X	X	X
CSR-U-2	Hard-start Kit	X		
CSR-U-3	Hard-start Kit		X	X
FSK01A ²	Freeze Protection Kit	X	X	X
OT18-60A ³	Outdoor Thermostat/Lockout Thermostat	X	X	X
TX2N4	TXV Kit			
TX2N4A	TXV Kit			
TX3N4	TXV Kit	X		
TX5N4	TXV Kit		X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Available in 24V legacy mode only. This feature is integrated in the communicating mode.

² Installed on indoor coil

³ Available in 24V legacy mode only. This feature is integrated in the communicating mode. Required for heat pump applications where ambient temperature falls below 0°F with 50% or higher relative humidity.

Note: Maximum number of installed accessories at the same time is limited by the size of the unit's control box.