

Reach-In Half Door Model - Refrigerator

HALF DOOR REFRIGERATION



CR1-2HD-HC



CR2-4HD-HC

| Model | Size |
|------------|-----------------------|
| CR1-2HD-HC | One Door, 23 Cu-Ft |
| CR2-4HD-HC | Two Doors, 49 Cu-Ft |
| CR3-6HD-HC | Three Doors, 72 Cu-Ft |

STANDARD FEATURES

- CFC free refrigerant and foam with self contained capillary tube system
- Electronic thermostat and digital LED temperature display for accurate control
- Self-closing doors that remain open past 90°
- Magnetic gasket can be replaced without a tool
- Door Locks
- Larger fan motors and blades for more efficient air flow for fast recovery times
- Four casters, two front locking
- Certified to NSF7 requirements for open food storage
- Adjustable heavy duty epoxy coated wire shelves
- Condensate heating element built into condensate pan to evaporate excess and expel freon heat
- Easy slide out compressor housing for service
- Bottom mount raises the floor for ease of adding and removing product
- Warranty: 2 years parts and labor
additional 3 years- compressor

*No suitable for installation in non-commercial or residential applications.

| Items | Description | Items | Description |
|-------------------|---|----------------------|--|
| External top/side | Stainless Steel | Temperature control | Solid State T-stat with Digital Display |
| Door | Stainless Steel | Comply to standard | ANSI/NSF-7, UL, Energy Star (CR1-2HD, CR2-4HD) |
| External back | 430 stainless steel | Refrigerating system | Capillary tube |
| Cabinet internal | Aluminum – white | Refrigerant | R290 |
| Internal floor | 304 stainless steel | Temp. Range in box | 34°F — 38°F |
| Insulation | Polyurethane (CFC free) | Evaporator/Condenser | Aluminum + Copper |
| Shelves | Heavy duty, PVC coating – 3 or 4 layers | Condensing unit | Bottom |
| Lighting | LED | Door lock | Yes |






DETAILS AND DIMENSIONS



CR1-2HD-HC



CR2-4HD-HC

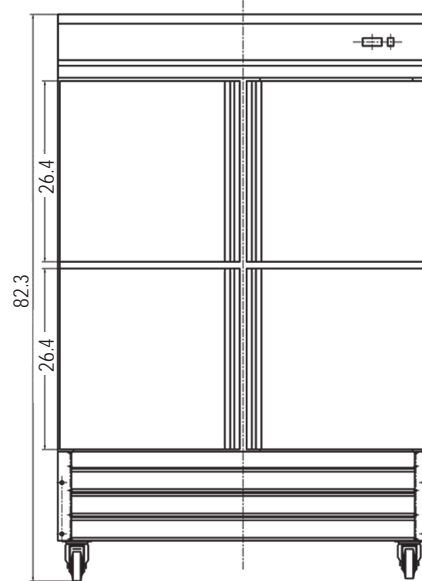

CR3-6HD-HC

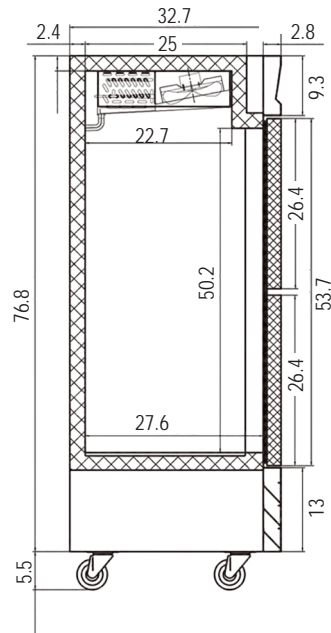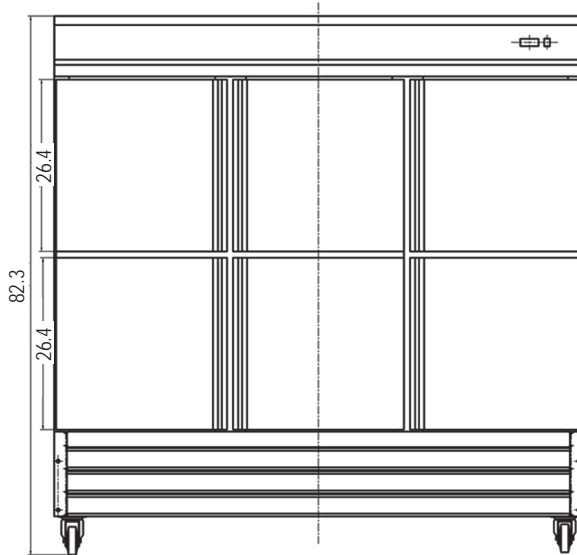

| Model | # of Doors | Storage CAP (Cu-ft) | Shelves | Shelves Sizes (in) | Cabinet Dim (in) | | | HP | Voltage /Hz /ph | Amp | NEMA Plug | Cord Lgth (ft) | Crated Weight (lbs) |
|------------|------------|---------------------|---------|--------------------|------------------|------|------|-----|-----------------|-----|-----------|----------------|---------------------|
| | | | | | W | D | H | | | | | | |
| CR1-2HD-HC | 2 | 23 | 3 | 24.3/21.6 | 26.8 | 32.7 | 82.3 | 1/8 | 115/60/1 | 3 | 5-15P | 8.2 | 350 |
| CR2-4HD-HC | 4 | 49 | 6 | 24.3/21.6 | 53.9 | 32.7 | 82.3 | 1/2 | 115/60/1 | 4.5 | 5-15P | 8.2 | 518 |
| CR3-6HD-HC | 6 | 72 | 9 | 24.3/23.6 | 81.0 | 32.7 | 82.3 | 3/4 | 115/60/1 | 7.5 | 5-15P | 8.2 | 669 |