



*torquUp*  
**THE ALL  
AROUND SOLUTION**

 **ESVATE<sup>®</sup>**  
CORPORATION  
Perú: [ventas@esvate.com](mailto:ventas@esvate.com) / +51 959370697  
[www.esvate.com](http://www.esvate.com)

**TXU LOW PROFILE TORQUE WRENCH**

# TXU

## UNI-SWIVEL LOW PROFILE HYDRAULIC TORQUE WRENCH


# THE WRENCH WITH A TWIST


NOT ONLY IS THE WRENCH ITSELF ROTATABLE AROUND EVERY APPLICATION ... SO IS THE UNI-SWIVEL. WE RE-WROTE THE BOOK WITH THE TXU WHEN IT COMES TO BEING THE MOST VERSATILE LIMITED CLEARANCE HYDRAULIC WRENCH. EVERY COMPONENT IS ENGINEERED FOR HIGH-TORQUE PERFORMANCE AND DURABILITY TO DELIVER JOB-SITE RESULTS ACCURATELY AND ON SCHEDULE. THE TXU IS THE ONLY TOOL IN THE JOB BOX THAT WILL GIVE YOU FREEDOM WHEN FACED WITH LIMITATIONS.



### THE POWER INSIDE



1. PATENTED "PEANUT-SHAPED" CYLINDER
2. ENGAGEMENT ROD
3. NEVER-LOCK DRIVE PAWL
4. MULTI-TOOTH RATCHET
5. ONE PIECE DRIVE PLATE
6. LINK PIN
7. IN-LINE REACTION PAD
8. STEEL ALIGNMENT PIN
9. COMPLETELY FLAT DESIGN
10. QUICK CONNECT COUPLERS
11. 180° X 360° UNI-SWIVEL
12. PROPRIETARY PISTON SEAL
13. SLIDER PREVENTS WEAR OF PISTON

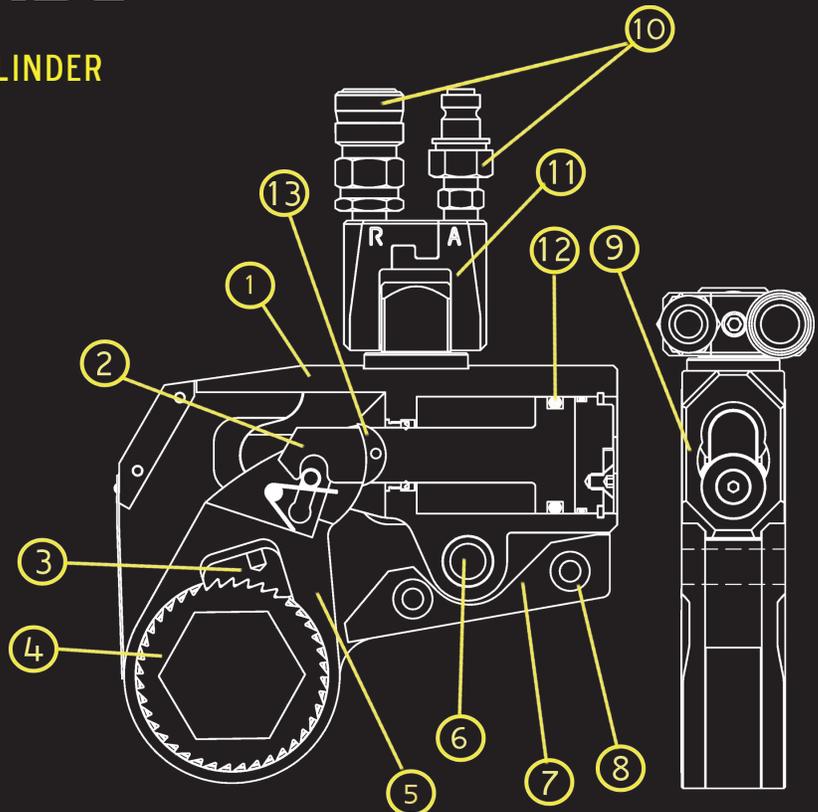

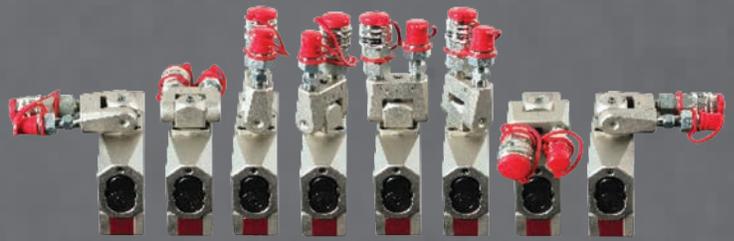

WWW.TORCUP.COM

**POWER ENGINEERED**

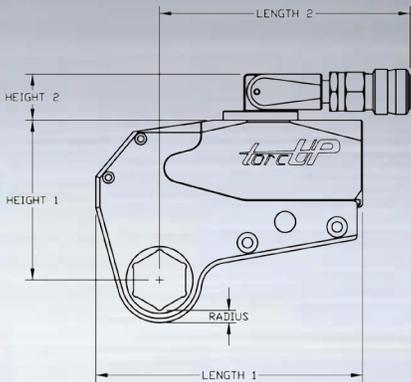

MODEL NUMBER	TXU-2	TXU-4	TXU-8	TXU-16
MIN. TORQUE (ft/lbs)	192	395	830	1560
MAX. TORQUE (ft/lbs)	1928	3950	8630	16600
MIN. TORQUE (nm)	260	535	1125	2115
MAX. TORQUE (nm)	2614	5355	11699	22503
CYLINDER WEIGHT (lbs)	4.0	6.9	12.5	16
CYLINDER WEIGHT (kg)	1.8	3.1	5.7	7.3
LINK WEIGHT FROM (lbs)	2.4	5.4	11.9	21.0
LINK WEIGHT TO (lbs)	3.5	7.6	14.5	28.0
LINK WEIGHT FROM (kgs)	1.0	2.4	5.5	9.5
LINK WEIGHT TO (kgs)	1.5	3.4	6.5	13.0
LENGTH 1 (in)	6.45	7.87	10.18	12.93
LENGTH 1 (mm)	163.8	199.9	258.6	328.4
LENGTH 2 (in)	5.99	6.58	7.34	8.2
LENGTH 2 (mm)	152.4	167.1	186.4	208.2
WIDTH 1 (in)	1.25	1.63	2.05	2.5
WIDTH 1 (mm)	31.8	41.4	52.1	63.5
WIDTH 2 (in)	2.19	2.26	2.26	2.26
WIDTH 2 (mm)	55.6	57.4	57.4	57.4
RADIUS RANGE FROM (in)	0.37	0.41	0.56	0.68
RADIUS RANGE TO (in)	0.59	0.77	0.93	1.68
RADIUS RANGE FROM (mm)	9.6	10.5	14.2	17.1
RADIUS RANGE TO (mm)	15.0	18.7	21.0	25.9
HEIGHT 1 (in)	3.39	4.93	6.18	7.58
HEIGHT 1 (mm)	86.3	125.2	157	192.5
HEIGHT 2 (in)	1.11	1.30	1.30	1.30
HEIGHT 2 (mm)	28.2	33.0	33.0	33.0
HEX RANGE FROM	3/4"/19mm	1"/27mm	1 7/8"/49mm	2 3/16"/55mm
HEX RANGE TO	2 9/16"/65mm	3 1/8"/80mm	4 5/8"/120mm	5 5/16"/135mm



**TXU** SERIES UNI-SWIVEL  
LOW PROFILE  
HYDRAULIC TORQUE WRENCH

**ADAPT** - IN CONFINED AREAS  
**ADJUST** - AROUND 360 DEGREES  
**ANTICIPATE** - ALL POSITIONAL OBSTRUCTIONS

LOW POINT  
REACTION PADDLE



BOX END  
SPANNER WRENCH



INLINE REACTION  
ARM



HEX TO SQUARE  
DRIVE ADAPTER



TOOL HANDLE



HEX REDUCER



**Worldwide Headquarters**

1025 Conroy Place  
Easton, PA 18040 USA  
TOLL FREE: 1-888-TorcUP-1  
TELEPHONE: 1-610-250-5800  
FAX: 1-610-250-2700

[www.torcup.com](http://www.torcup.com)



**TXU SERIES**

Made In USA

Four Models From 192 ft/lbs to  
16,000 ft/lbs

Every Unit Calibrated In  
ISO17025 Laboratory



CARRYING  
CASE



Catalog 2017