
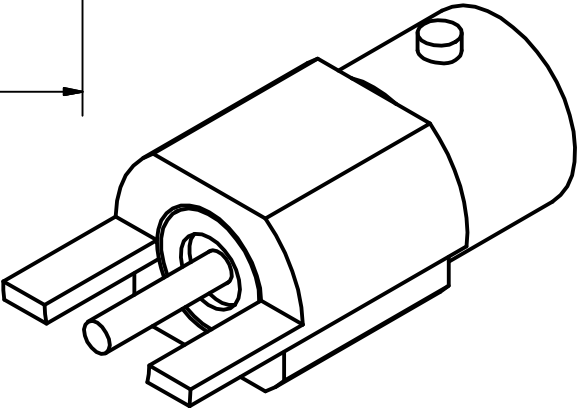
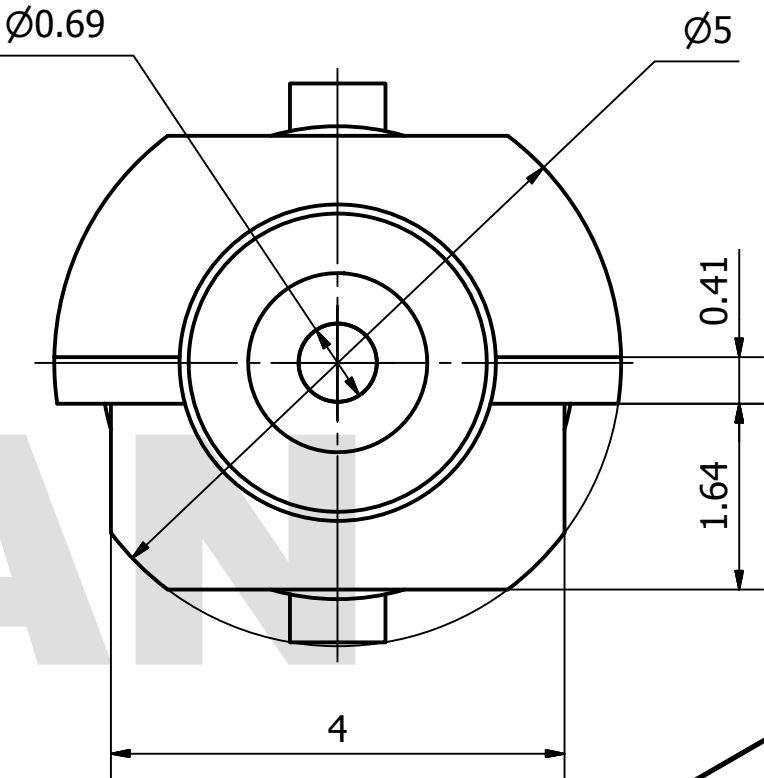


PRODUCT DATA SHEET

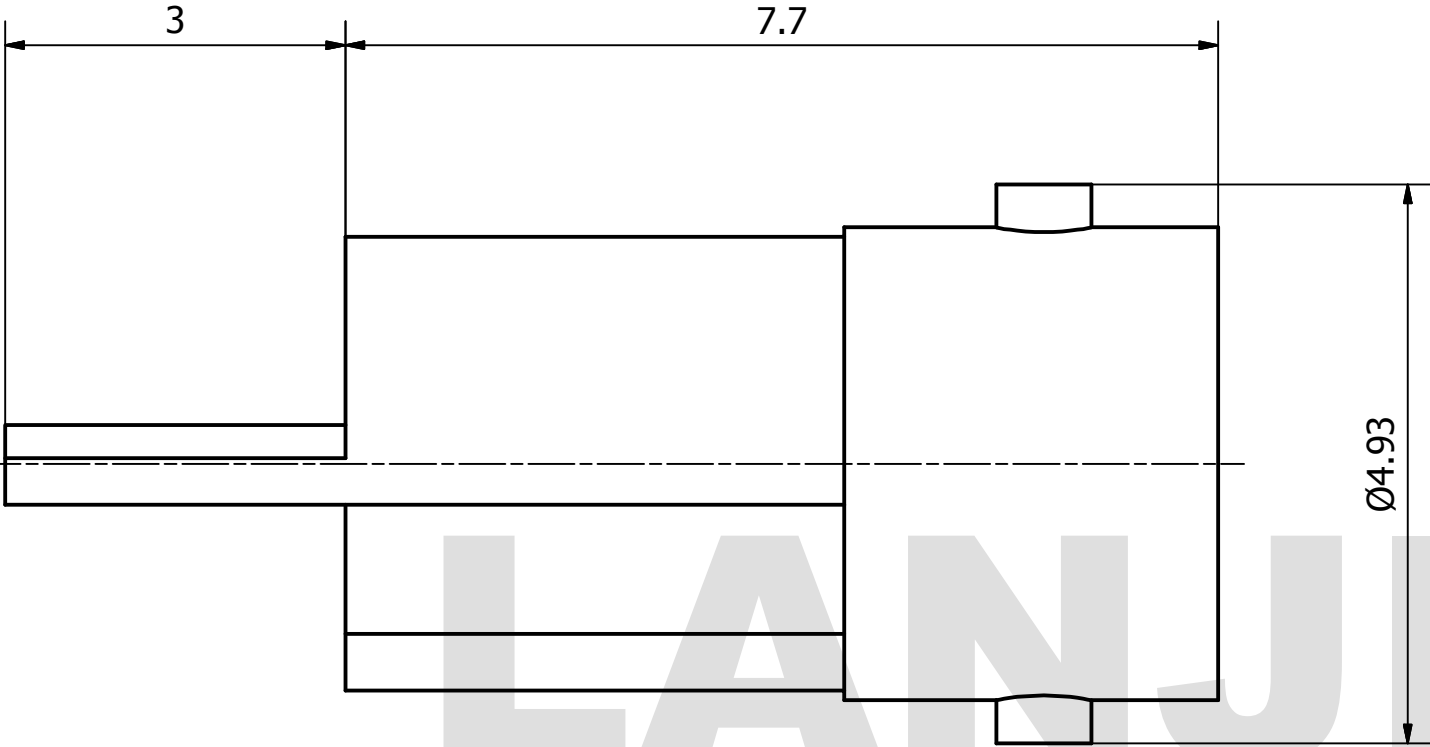

MATERIAL:
BODY: STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300
CONTACT: BERYLLIUM COPPER PER ASTM B196.
ALLOY NO. UNS C17300
INSULATOR: PTFE PER ASTM D1710

PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 40 GHz
VSWR: ≤1.30

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :				LANJIAN  ELECTRONICS 38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM					
	TOLERANCES :					
	X.X	± 0.20	ANGULAR : ± 1°		DEBURR AND	
	X.XX	± 0.10	FILLETS R/C : ± 0.10		BREAK SHARP	
	X.XXX	± 0.01	SURFACE FINISH : Ra 1.6		EDGES	
		NAME	DATE	SIGNATURE		
	DRAWN					
	CHK'D					
	APPV'D					
	MFG					
PROJECTION		SIZE	SCALE		DWG No.	REV.
		A3	15 : 1		GCPZ3.650.G.011	
DO NOT SCALE THE DRAWING					PAGE	
					1 / 1	