




TEXTILENE
BRAND FABRIC
nano™ 95

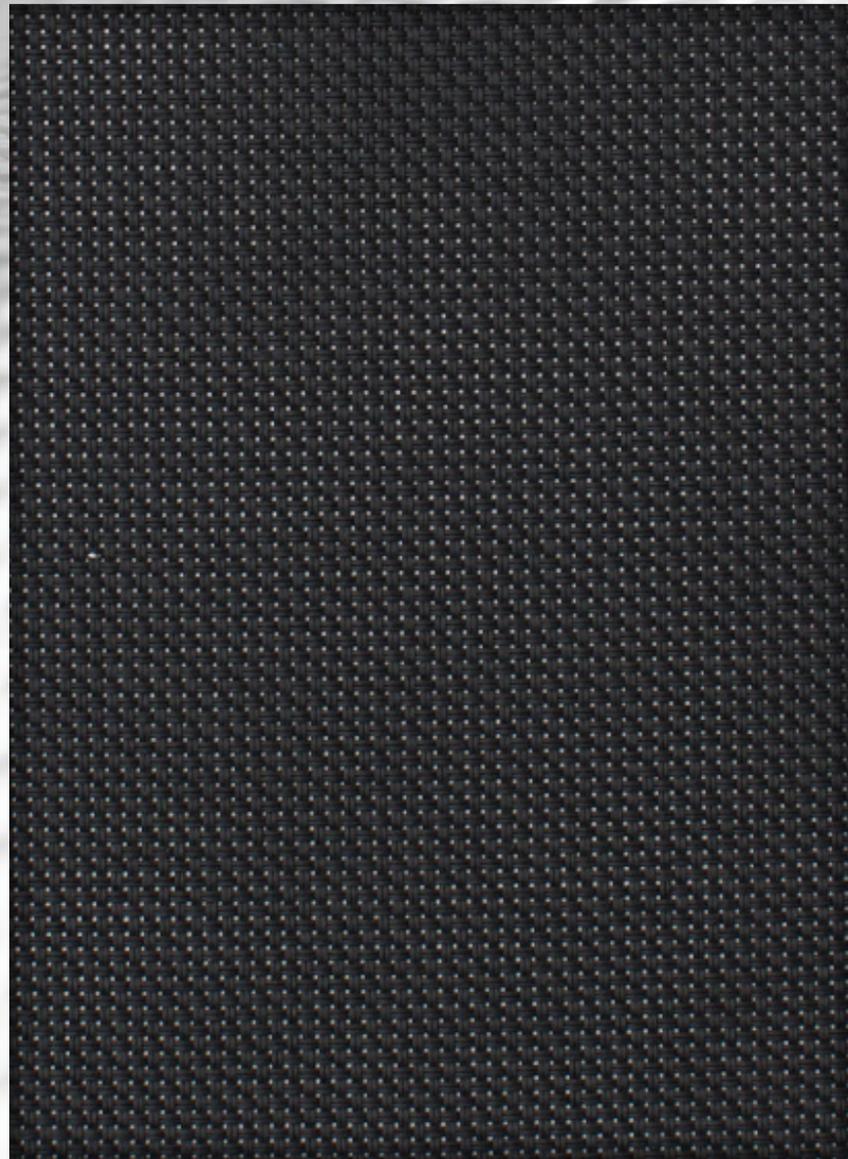

Due to the technical limitations of digital cameras and inconsistencies of display monitors, the characteristics and colors of the fabrics seen on your screen may be slightly different than the actual product.

T18FVS026
Flat Black

TEXTILENE® nano™ 95 is a durable, yet lightweight synthetic fabric. It is lighter and finer with the same technical qualities as the original TEXTILENE®. TEXTILENE® nano™ 95 is excellent for exterior and interior use. It is flame resistant, fade resistant, and can reduce energy costs while blocking up to 95% of the sun's harmful rays.

Specifications

REACH Compliant - Regulated by Registration, Evaluation, Authorization and Restriction of Chemicals. REACH places greater responsibility on industry to manage the risks that chemicals may pose to human health and the environment.

Children's Toy Act - Does not contain harmful phthalates listed under Section 108 of the Consumer Product Safety Improvement Act of 2008 (CPSIA).

Fire Classification - Passes California U.S. Title 19 (small scale), NFPA701-2015 TM#1 (small scale), NFPA 101 (Class A Rating), UBC (Class 1), BS 5867 2008 Part 2 Type B Performance, NFPA 701 TM #2 (large scale), and CAN/ULC-S 109-03 (large and small scale).

Environmental Certification - GREENGUARD gold certified. Acceptable for use in environments such as schools and healthcare facilities. Complies with requirements of the State of California's Department of Public Health "Standard Method for Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1 (2010)" (also known as California Section 01350).

RoHS Compliant - Free of Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent chromium (Hex-Cr), Polybrominated biphenyls (PBB), and Polybrominated diphenyl ethers (PBDE).

Bacteria and Fungal Resistance - Passes ASTM E 2180, ASTM G21. Includes specially formulated antimicrobial.



Technical Data

Item Number: T18FVS, T18FVT

Product Description: A woven fabric using .014" diameter vinyl coated 420 denier polyester core yarns woven in the warp and fill.

Attribute	ASTM	Warp	Fill	Typical
Construction, end/inch	D3775-17	36.0 ±0.5	34.0 ±0.5	
Weight, oz/yd ²	D3776-09			14.7
Weight, g/m ²	D3776-09			498.5
Tensile Strength (grab), lbf / daN	D5034-09	423.6 / 192.1	382.2 / 173.4	
Tensile Strength (strip), lbf / daN	D5035-11	218.5 / 99.1	188.4 / 85.5	
Tear Strength (trapezoidal), lbf / daN	D1117-99	58.4 / 26.5	42.2 / 19.1	
Elongation, %	D5035-11	12.7	11.6	
Abrasion Resistance (CST10/500 cycles/ with no added weight)	D3884-09	No Exposure of Core Yarn		
Flammability Rating		CA Title 19 & NFPA 701		
Weatherability, 1200 hours	G154-16	No Discoloration		
Mildew Resistance	G21-13	Pass		
Thickness, inches / mm	D1777-15			0.026 / 0.66

The above results are a representation of real data from single test samples. Presently no specification is incorporated.

Style	Total Solar			Visible			Insulating Glass			Insulating Glass		
	Ts	Rs	As	Ts	Rs	As	1/2" Clr.	1" Clr.	1" HA	1/2" Clr.	1" Clr.	1" HA
Flat Black Profile Angle 0	8	4	88	8	4	88	0.26	0.21	0.16	0.20	0.13	0.11
Flat Black Profile Angle 45	5	8	87	6	9	85	0.15	0.15	0.15	0.11	0.11	0.11

DISTRIBUTED OR MANUFACTURED BY:

*Custom colors and widths available. Minimum order of 1000 yds. Upcharges may apply. ** Available in 33.3 lrd rolls.




White
T18FVS025 x 126"

Bone
T18FVT057 x 126"

Sable
T18FVT056 x 126"

Stone Texture
T18FVT058 x 126"

Shadow Texture
T18FVT055 x 126"

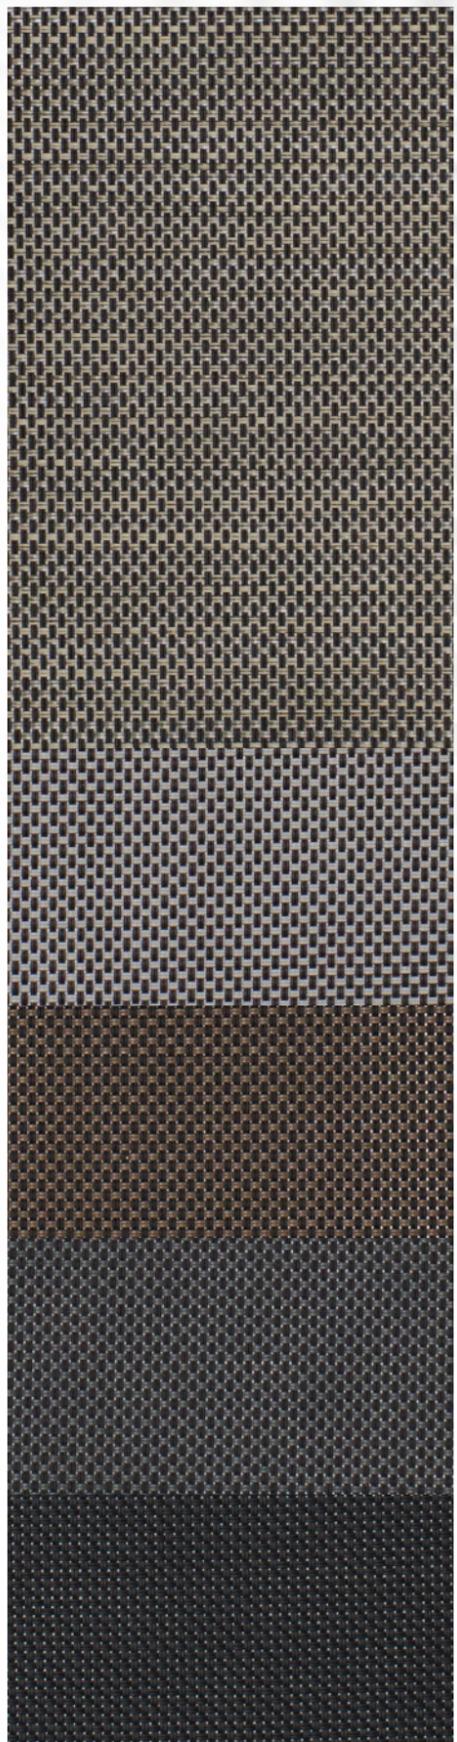

Espresso Texture
T18FVT061 x 126"

Granite
T18FVT059 x 126"

Tobacco
T18FVT054 x 126"

Charcoal
T18FVT060 x 126"

Flat Black
T18FVS026 x 126"



Due to the technical limitations of digital cameras and inconsistencies of display monitors, the characteristics and colors of the fabrics seen on your screen may be slightly different than the actual product.

T18FVS026
Flat Black