

SPECIFICATIONS:

Impedance: 50 Ohm

Frequency: 2-18 GHz

VSWR:

Input: 1.50 max.

Output: 1.50 max.

Isolation: 17 dB min.

Insertion Loss: 1dB max.


Amplitude Balance: 0.3 dB max.

Phase Balance: 5.0° max.

Power: 30 watts

Operating temp. : -55°C - + 105°C

Part	Material	Plating
SMA Connectors	Stainless Steel	Passivated
Contacts	Beryllium Copper	Gold
Insulators	PTFE	—
Housing	Aluminum	Iridite

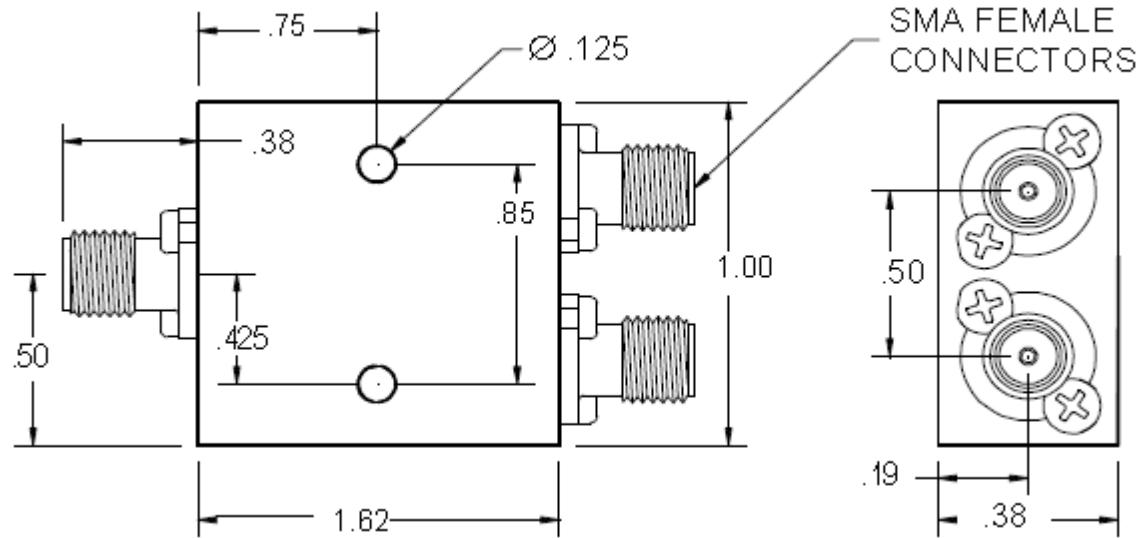

Dimensions are for reference only, and are subject to change without notice.

PRF
Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

	PART NUMBER	PRF-PD122018
08/23/2013	DESCRIPTION	SMA 2 WAY POWER DIVIDER 2-18 GHz, 30 WATT
APPROVED		
A. Ianacci		