

Piston pumps (grease)

Mechanic drive



FHX-2


Grease lubrication pumps

Technical data

Output rate:	optional 1,5 or 3 cm ³ /stroke
Reservoir content:	1,2l
Material:	plastic transparent
Operating pressure:	max. 300 bar (at 1,5 cm ³) max. 150 bar (at 3 cm ³)
Lubricant:	greases up to NLGI 2 (greases with solid contents only on demand)
Operating temp.:	0 to +70 °C
Number of outlets:	1
Type of outlet:	male stud coupling see order key for pipe-Ø
Installation position:	vertical, as shown
Weight:	max. 3,7 kg (without grease filling)



Symbol



Order key for series 2534

2534 15 3 3 000


Type-no.	2534				
Code-no.	2534				
Output rate (cm³/stroke)	1,5	3			
Code-no.	15	30			
Position of lever	2	2			
Position of pressure connection	1	3			
Position of filling connection	3	1			
Code-no.	3	4			
Pressure connection Ød (mm)	6	8	10		
Code-no.	1	2	3		
Special versionen				Code	
Standard (fill-in connection closed)				000	
fill-in connection with conical nipple acc. to DIN 71412				001	
fill-in connection with filling coupling				032	

© BEKA 2014 All rights reserved!


Subject to alterations!

1090200394

06-2-70-03 state: 09.14EN

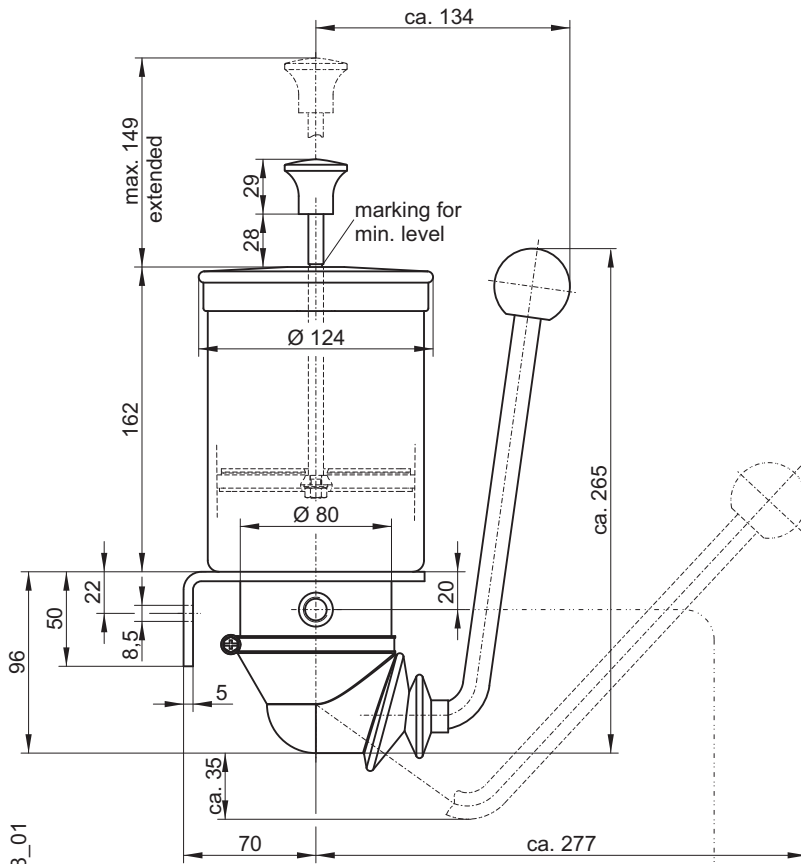

FAZ01838_01

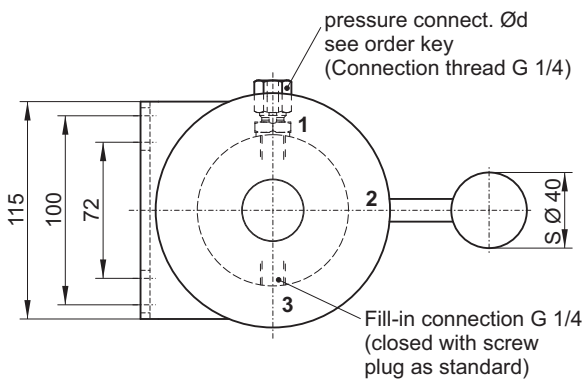

Position of lever is on pos. 2 (standard) and pressure or fill-in connection optionally on pos 1 or 3 (other versions on request).

Accessory


(see order key for special version)

Fill-in connection version

filling coupling,

Order-no.:

21590061006



Conical nipple acc. to DIN 71412,


Order-no.:

0971412011113

Cap for nipple GPN 985,

Order-no.:

1004010021



FAZ04360_00