## Pride Lifts & Ramps

## **SPECIFICATIONS**

<b>Pride</b> ® Lifts & Ramps	Backpacker <sup>®</sup> Plus Interior Lift	Backpacker <sup>®</sup> MV Interior Lift	Backpacker <sup>®</sup> AVP Interior Lift	Outlander Exterior Lift	Outlander DE Exterior Lift	Outlander XL Exterior Lift	Outlander LP Exterior Lift	Outlander TM Exterior Lift	Commander 400 Exterior Lift	PrideBoom 250 <sup>4, 8, 9</sup>	PT-150 Power Tote Mini	Caddy Manual Wheelchair Exterior Carrier	Olympian AutoLift	Milford Person Lift
BASE WEIGHT 5	155 lbs.	191 lbs.	193 lbs.	93 lbs.	88 lbs.	103 lbs.	10" -76 lbs. 14" -75 lbs.	76 lbs.	109 lbs.	58 lbs. (Straight Arm) <sup>17</sup> 65 lbs. (Offset Arm) <sup>17</sup>	47 lbs.	13 lbs.	22 lbs. or 29 lbs.	18 lbs.
MAXIMUM SCOOTER/PC OVERALL WEIGHT	350 lbs.	350 lbs.	350 lbs.	380 lbs. <sup>13, 16</sup>	380 lbs.13,16	380 lbs. <sup>13, 16</sup>	350 lbs.	150 lbs.	400 lbs.	250 lbs.	150 lbs.	100 lbs.	260 lbs. or 440 lbs.	330 lbs. max.
MAXIMUM PRODUCT WIDTH	27"	27"	27"	28"	27"	27"	27"	24"	N/A	N/A	22"	N/A	N/A	N/A
OVERALL PLATFORM LENGTH	44" (43" usable surface)	44" (43" usable surface)	42"- 34" adjustable (41"- 33" usable surface)	49.25" (41" usable surface)	51" (42" usable surface)	56.75" (49" usable surface)	19"	37"	N/A	N/A	36"	N/A	16" - 24"	N/A
MAXIMUM TRAVEL DISTANCE FROM THE GROUND		37"	37"	20"	20"	20"	20"	21"	70"	50"	20"	N/A	36" Vehicle Dependent	22.5"
MOTOR	Sealed 12 Volt DC	Sealed 12 Volt DC	Sealed 12 Volt DC	Sealed 12 Volt DC	Sealed 12 Volt DC	Sealed 12 Volt DC	Sealed 12 Volt DC	Sealed 12 Volt DC	12 Volt DC	12 Volt DC	Sealed 12 Volt DC	Must manually lift 50% of the weight of the wheelchair to store	12 Volt DC	12 Volt DC
WARRANTY	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	3-Year Transferable	1-Year Transferable	1-Year Transferable
HITCH CLASS <sup>6</sup>	N/A	N/A	N/A	Class II 10 , III 15 & IV13	Class II 10 , III 15 & IV13	Class II 10 , III 15 & IV13	Class II 10 , III 15 & IV13	Class II 10 , III 15 & IV13	N/A	N/A	Class I <sup>7</sup> , II <sup>10</sup> , III <sup>15</sup> & IV <sup>13</sup>	Class I <sup>1</sup>	N/A	N/A
OPTIONS	Battery pack w/charger, Retractable strap kit	Battery pack w/charger, Retractable strap kit	Battery pack w/charger, Retractable strap kit	Battery pack w/charger, Swing-away mount <sup>11, 14</sup>	Battery pack w/charger, Swing-away mount <sup>11, 14</sup>	Battery pack w/charger, Swing-away mount <sup>11, 14</sup>	Battery pack w/charger, Swing-away mount <sup>11, 14</sup>	Swing-away adaptor	N/A	Battery pack w/charger	License plate kit, Battery pack w/charger, Swing-away mount <sup>11, 12</sup>	N/A	Brilliance Package: Brilliant Blue or Radiant Red	Sling Size & Type, Wall Bracket, Smartbase
VEHICLE PLATFORM	Minivan, Full-size van <sup>4</sup> and Crossover	Full-size van, Minivan, SUV and Crossover	Full-size van, Minivan, SUV and Crossover				Full-size van, Mini-van, Truck, Sedan, SUV and Crossover				Full-size van, Minivan, Truck, Sedan, SUV and Crossover	Full-size van, Minivan, Truck, Sedan, SUV and Crossover	Full-size van, Minivan, SUV and Crossover	Full-size van, Minivan, Sedan, SUV and Crossover
LIFTS CURRENT PRIDE <sup>®</sup> PRODUCTS <sup>2,3</sup>	with contoured, Specialty & Synergy <sup>®</sup> seating, except: Pursuit <sup>®</sup> , Pursuit <sup>®</sup> XL, Maxima 3 & 4, 1420 & 1650 Call for details or visit	with contoured, Specialty & Synergy® seating, except: Pursuit®, Pursuit® XL, Maxima 3 & 4, 1420 & 1650 Call for details or visit www.prideliftsandramps. com with power positioning	All Pride* Scooters & Pride*/Quantum* PWCs & Synergy* seating, except: Pursuit*, Pursuit*, Pursuit*, XL, Maxima & 4, 1420 & 1650 Call for details or visit www.pridellikandramps. com with power positioning systems and large scooters.	& Synergy® seating, except: Pursuit®, Pursuit® XL, Maxima 3 & 4, 1420 & 1650 Call for details or visit www.prideliftsandramps. com with power positioning	Maxima 3 & 4, Victory® 9 3 & 4, Victory® 10 3 & 4	Pursuit*, Maxima 4	Jazzy <sup>e</sup> 1113 ATS, Jazzy Select <sup>®</sup> Series, I <sub>6</sub> Quantum <sup>®</sup> 610 & Q6 Edge <sup>®</sup>	All Pride* Travel Mobility Scooters	All Pride <sup>®</sup> Scooters, except: Pursuit <sup>®</sup> , Pursuit <sup>®</sup> XL Check with your authorized Pride Provider, as lifting is based on your vehicle	All Pride® Scooters, except: Maxima 3 & 4, Pursuit® & Pursuit® XL All Pride® & Quantum® PWCs except: 06 Edge®, 060002 & Jazy® 1650 Check with your Authorized Pride® Provider, as lifting is based on your vehicle.	Go-Go Elite Traveller® 3, Go-Go Elite Traveller® Plus 3, Go-Go® Ultra X 3	Litestream <sup>®</sup> XF, Pride <sup>®</sup> Stylus <sup>®</sup> & Folding wheelchairs	All Pride <sup>®</sup> Scooters, Pride <sup>®</sup> & Quantum <sup>®</sup> e <sup>®</sup> XCs (Dependent on Storage Area)	NA

- 1. If vehicle is equipped with a Class II or Class III hitch,
- trequires a hitch reducer, additional charges apply.
  Lifting weight does not include accessories or certain upgraded seating. Please contact Customer Service for greater detail.

D


- Vehicle dependent.
  Vehicle dependent.
  Requires vehicle modification.
  Does not include any accessories or hardware.
  Hitch weight carrying capacity varies by vehicle.
  Call for details.
- 7. Class I hitch must accept 1.25" of square tube. Boom arm angle adjustability of 0°, 5°, 10°, 12° and 15°.

TCE

Mobility Products Co.

LIVE YOUR BEST®

9. Horizontal strap adjustment of 21" to 35" (in 1" increments). Weight capacity reduced to 190 lbs. max.
 Class III and IV only.
 Weight capacity reduced to 113 lbs. Standard Class IV receiver only.
 3. Standard Class IV receiver only.
 3.25 lbs. weight capacity.
 3.50 lbs. maximum product weight with a Class III hitch.
 16. Vehicle requires Class IV hitch with a tongue weight of at least 500 lbs. 17. Includes post weight.

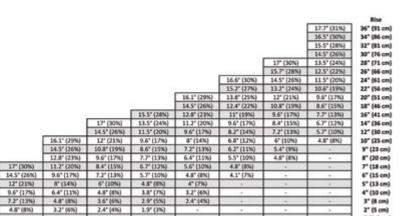


4' (122 cm) 3' (91 cm) 5' (152 cm) 6' (183 cm) 7' (213 cm) 8' (244 cm)

Single Fold Ramos

## Rubber Threshold Ramps Specifications

RISE	TOTAL LENGTH	USABLE WIDTH	OVERALL WIDTH	TOTAL WEIGHT		
1"	10.43"	36"	39"	9.5 lbs.	The Rubber Threshold	
1.5"	17.33"	36"	41"	21.5 lbs.	Ramp has a maximum incline of 4° (7%), which	
2"	24.23"	36"	42.5"	37 lbs.	meets the requirement	
2.5"	31.13"	36"	44.2"	55 lbs.	established by the ADA.	
3"	38.63"	36"	46"	78 lbs.		

 $\overbrace{+10.43\,\mathrm{in.}}^{1\,\mathrm{in.}} \xrightarrow{1\,\mathrm{in.}}_{-1\,\mathrm{e.g.in.}} \xrightarrow{1\,\mathrm{in.}}_{+1\,\mathrm{e.g.in.}} \xrightarrow{2\,\mathrm{in.}}_{+1\,\mathrm{e.g.in.}} \xrightarrow{2\,\mathrm{in.}}_{+1\,\mathrm{e.g.in.}} \xrightarrow{3\,\mathrm{in.}}_{+1\,\mathrm{e.g.in.}} \xrightarrow{3\,\mathrm{in.}}_{+1\,\mathrm{e.g.in.}}$ 




10' (30 Multi-Fold Ramos

1" (2.5 cm)

CA-PLRGUIDE-08-04-14

The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed & range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3 %.



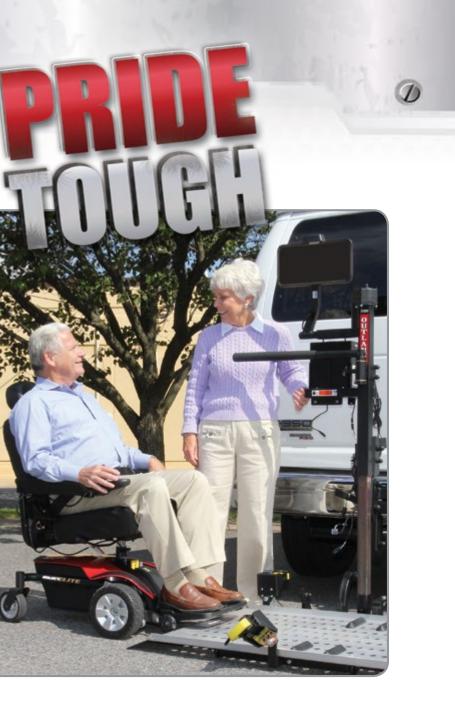



## LIFTS & RAMPS GUIDE

Beamsville, Ontario • 888-570-1113

D



for more information.