


SPECIFICATIONS:

Impedance: 50 Ohm
 Frequency: DC-18 GHz
 VSWR: 1.20:1 Max.
 Operating temp. : -55°C - +125°C
 Power Rating: 2 watts

Part	Material	Plating
Body	Stainless Steel	Passivated
Contact	Beryllium Copper	Gold
Insulator	PTFE	N/A

RoHS Compliant

SMA MALE

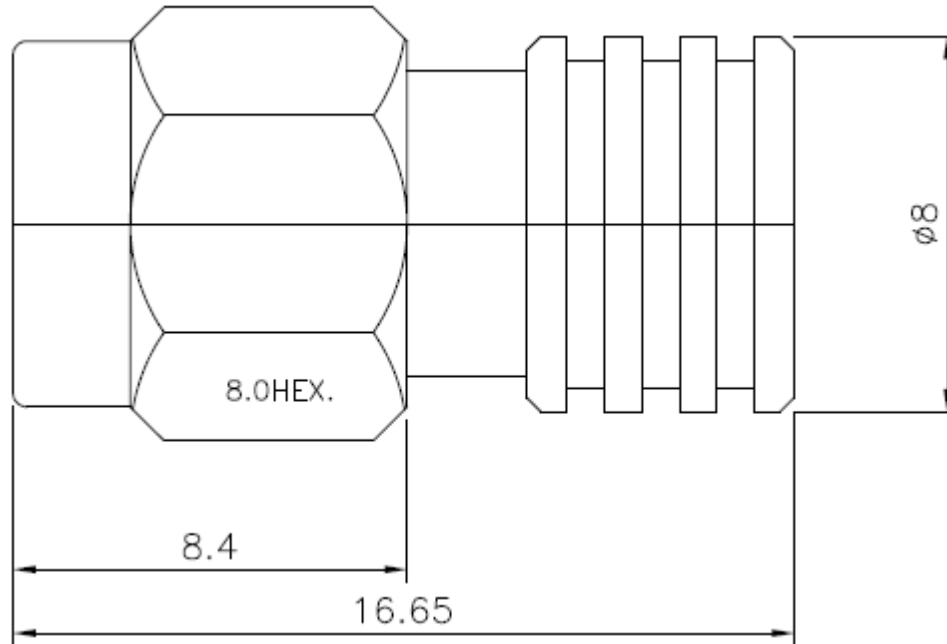

Dimensions are for reference only, and are subject to change without notice.



Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

07/14/2012
 APPROVED
 A. Ianacci

PART NUMBER	PRF-TE1M218-SP
DESCRIPTION	SMA MALE TERMINATION DC-18 GHz, 2 WATT