






Remove lid screws

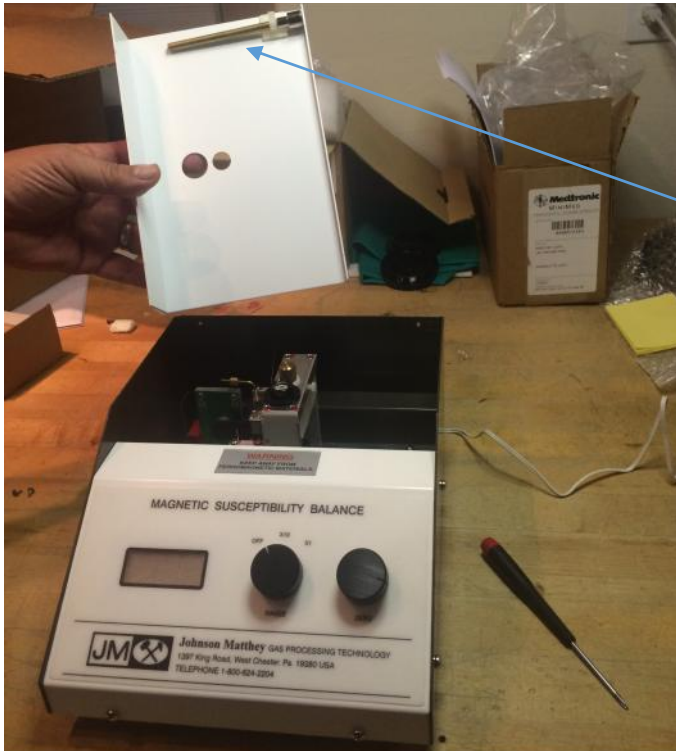


Tube guide under lid

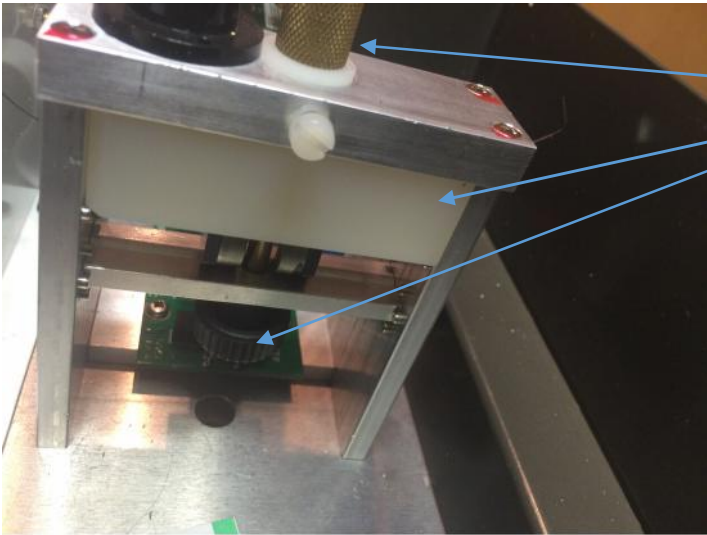


Travel clamp

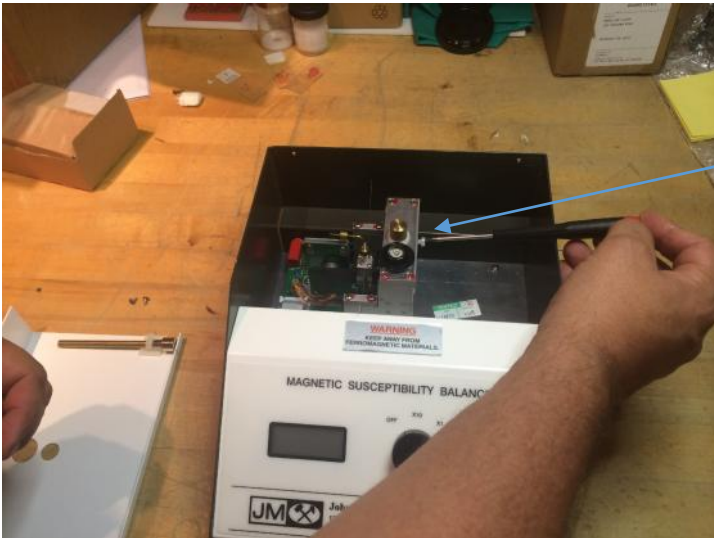

Loosen nylon screw

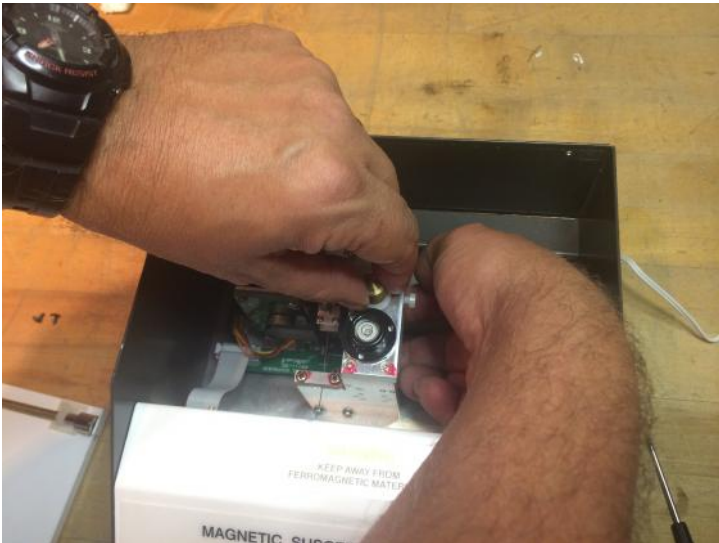


Loosen travel clamp

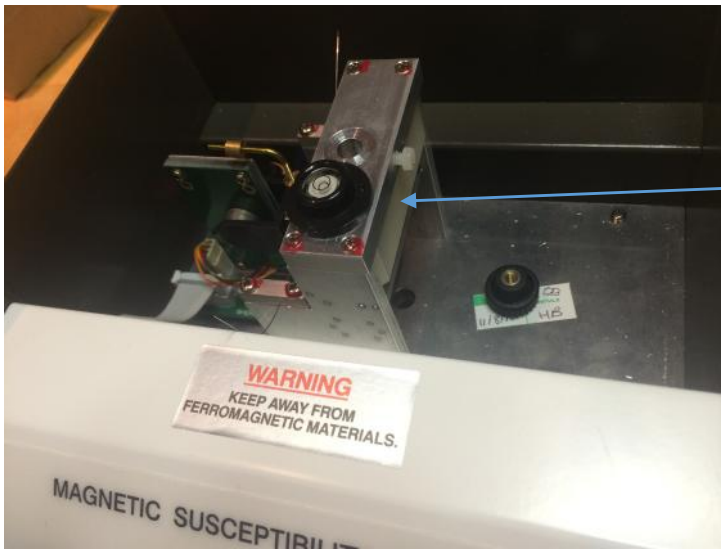

block




Remove block

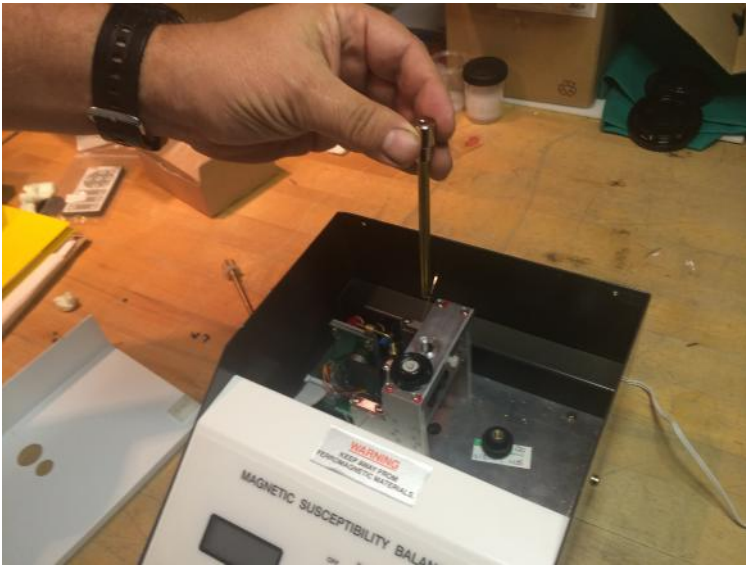

Install tube guide



Tighten screw

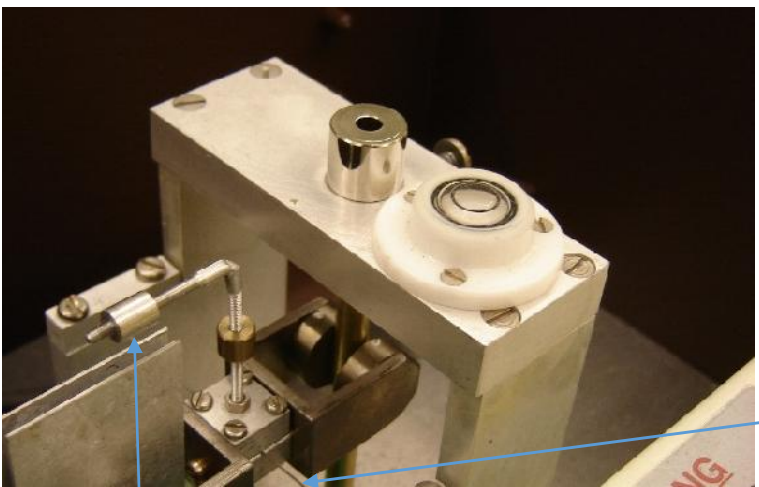

Counter weight

Torsion wire