


PRODUCT DATA SHEET

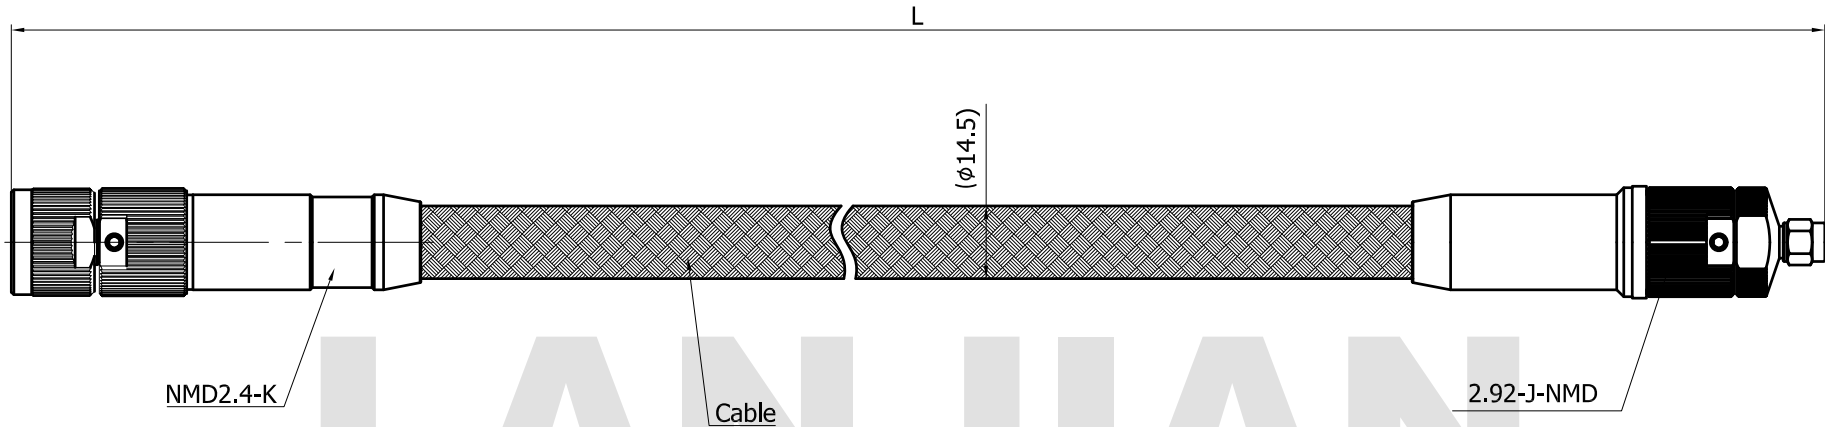

MATERIAL:

BODY: STAINLESS STEEL
 CONTACT: BERYLLIUM COPPERBRASS
 INSULATOR: PEI

PERFORMANCE:

IMPEDANCE: 50 OHMS
 FREQUENCY: 50GHz
 VSWR: ≤1.30

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM		
	TOLERANCES :		
	X.X	±0.20	ANGULAR : ±1°
	X.XX	±0.10	FILLETS R/C : ±0.10
	X.XXX	±0.01	SURFACE FINISH : Ra 1.6
			DEBURR AND BREAK SHARP EDGES
		NAME	DATE
	DRAWN	X.C.W	08/18/2023
	CHK'D	H.Z.Y	08/18/2023
APPV'D	H.Z.Y	08/18/2023	
MFG			
PROJECTION	SIZE	SCALE	
	A3	3:1	

38 Hengtong Road, Xinqu Dingmao
 Zhenjiang, 212009, Jiangsu, P. R. China

TITLE	
Z40SSPN-NMD2.4K/2.92J-NMD-L cable assembly	
DWG No.	REV.
	A
DO NOT SCALE THE DRAWING	
	PAGE 1 / 1