

Specifications


Frequency range: DC-4GHz

Nominal Impedance: 50 Ohm

VSWR: 1 .20:1 max. @ 4 GHz

Oper. Temperature range ; -65C- +125C

RoHS Compliant

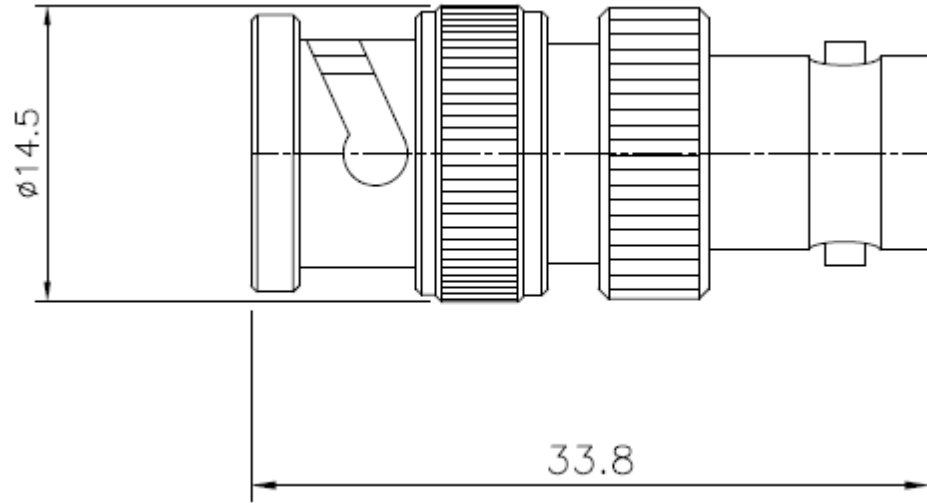

<u>Adapter Part</u>	<u>Material</u>	<u>Plating</u>
Coupling Cap	Zinc	Nickel
Body	Brass	Nickel
Center contact	Beryllium Copper	Gold
Insulator	PTFE	N/A



Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premierf.com
 www.premierf.com

Dimensions in mm	PART NUMBER	PRF-AD3M3F
11/04/2012	DESCRIPTION	BNC MALE TO BNC FEMALE ADAPTER, DC-4 GHz
APPROVED		
C. Smith		