



NSF/ANSI 61

WHERE QUALITY COMES FIRST

INTRODUCING the **NEW** Zilmet USA

Hydro-Plus Bottom Connection Well Tank



technical features:

- 150 PSI Rated
- All Weather Epoxy-polyester Powder Coated Paint
- SS Connector
- Polypropylene Base for All Weather Applications
- 5 year warranty on all models

(HydroPlus BC)

■ **material description**

description	material
shell	carbon steel
connection	stainless steel
fixed membrane	butyl**
material of base	polypropylene
tank color	blue
base color	grey

** for potable water applications

■ **operating conditions**

max. operating pressure	150 psi
operating temperature	210 °F
factory precharge	38 psi

■ technical and dimensional data

Model	Capacity	Diameter	Height	Base Diameter	Connection Height	Connection Size	Precharge
	gallons	inches (D)	inches (H)	inches (B)	inches (E)	NPT (C)	psi
ZHP202BC	21.1	17.7	26.9	16.8	1.6	1"	38
ZHP202BVBC	21.1	17.7	27.9	16.8	1.6	1"	38
ZHP203BC	27.7	17.7	29.2	16.8	1.6	1 1/4"	38
ZHP34BC	34.1	19.7	33.9	16.8	1.6	1 1/4"	38
ZHP204BC	39.6	19.7	38.3	16.8	1.6	1 1/4"	38
ZHP250BC	54.7	19.7	49.7	16.8	1.6	1 1/4"	38
ZHP302BC	79.3	24.8	46.9	16.8	2.1	1 1/4"	38
ZHP351BC	119.0	24.8	65.9	16.8	2.1	1 1/4"	38


Model	System Drawdown	
	30-50 psi	40-60 psi
ZHP202BC/ZHP202BVBC	7.2	6.2
ZHP203BC	9.5	8.2
ZHP34BC	11.6	10.1
ZHP204BC	13.5	11.7
ZHP250BC	18.6	16.1
ZHP302BC	27.0	23.4
ZHP351BC	40.6	35.1

■ zilmet well tank sizing chart

Gallons per Minute	30/50 psig		40/60 psig	
	1 min	2 min	1 min	2 min
GPM				
5	ZHP202BC/202BVBC	ZHP34BC	ZHP202BC/202BVBC	ZHP34BC
10	ZHP34BC	ZHP250BC	ZHP34BC	ZHP302BC
12	ZHP204BC	ZHP302BC	ZHP204BC	ZHP302BC
15	ZHP204BC	ZHP302BC	ZHP250BC	ZHP351BC
20	ZHP250BC	ZHP351BC	ZHP302BC	ZHP302BC (2)
25	ZHP302BC	ZHP302BC (2)	ZHP302BC	ZHP302BC (2)
30	ZHP302BC	ZHP302BC (2)	ZHP351BC	ZHP351BC (2)
35	ZHP351BC	ZHP351BC (2)	ZHP351BC	ZHP351BC (2)

* Use this chart to properly size your well tank to prevent excessive wear and tear on your well pump and to reduce energy consumption. (2) indicates - two tanks required.

■ technical drawing

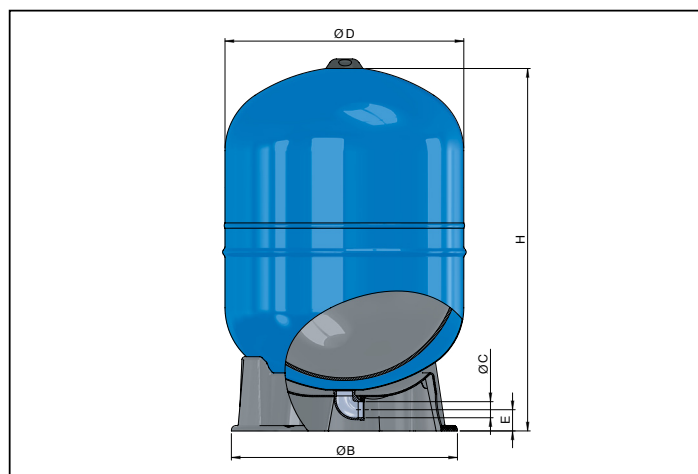

Rev. March 2020



North American Headquarters

Zilmet USA
400 Frenchtown Road
East Greenwich, RI 02818
Tel. 401-884-4943
info@zilmetusa.com
www.zilmetusa.com

Headquarters

Via del Santo, 242 - 35010 Limena (PD) - Italy
Tel. +39 049 7664901
Fax +39 049 767321
www.zilmet.it
zilmet@zilmet.it

Production plants - Italy

Limena (PD) Via del Santo, 242
Via Visco, 2 • Via Colpi, 30
Via Tamburin, 15/17
Bagnoli di Sopra (PD) - Via V Strada, 21/23

Branches

Zilmet Deutschland GmbH
www.zilmet.de
Zilmet USA
www.zilmetusa.com
Zilmet UK
www.zilmet.co.uk