

DECRA®

Shingle XD®

Experience the DECRA Difference



STEEL ROOFING DESIGNED WITH THE CONTRACTOR IN MIND

DECRA®


Shingle XD®

THICKER, BOLDER
MORE DIMENSIONAL


- ◆ Corrugated Design for Strength
- ◆ Stronger, More Seamless Sidelaps
- ◆ Unique Hidden Fastener System (installs with nails or screws)
- ◆ Direct to Deck Saves Time and Money
- ◆ “Cut & Tuck”™ Technology (no special tools required)
- ◆ Thicker, Bolder, More Dimensional Look
- ◆ Tear-off may not be required (see local code)
- ◆ Lifetime Limited Warranty

DECRA® Shingle XD®

Components:

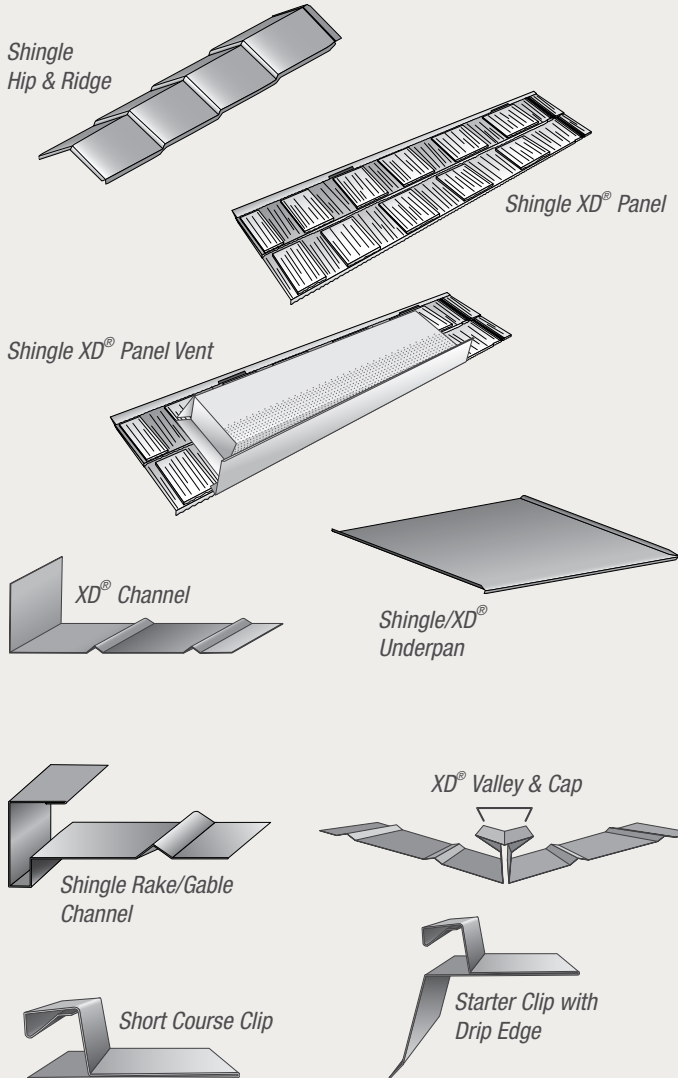

Color Blends:

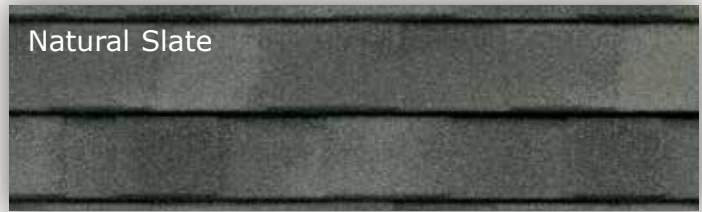

Due to the printing process, colors may vary from actual product. Please refer to an actual full panel product sample before ordering.

Look for our complete line of venting and debris guard accessories, designed exclusively for use with DECRA Roofing Systems.

Specifications:

Minimum Pitch ▶	4:12
Panel Size ▶	14-1/8" x 52-3/8"
Installed Exposure ▶	12-1/4" x 49-1/2"
Panels per Square ▶	23.8
Installed Weight ▶	150 lbs./sq.

Lifetime Limited Warranty; 120 mph Wind Warranty; Highest Impact Resistance to Hail; Freeze/Thaw Resistant; Fire Safe; UL File #R14710; Florida Building Code, Miami-Dade County NOA, CCMC and ICC-ES reports available at www.decra.com.

DECRA®

Stone Coated Steel Roofing Systems

877.GO.DECRA [463.3272] | www.decra.com

