


PRODUCT DATA SHEET

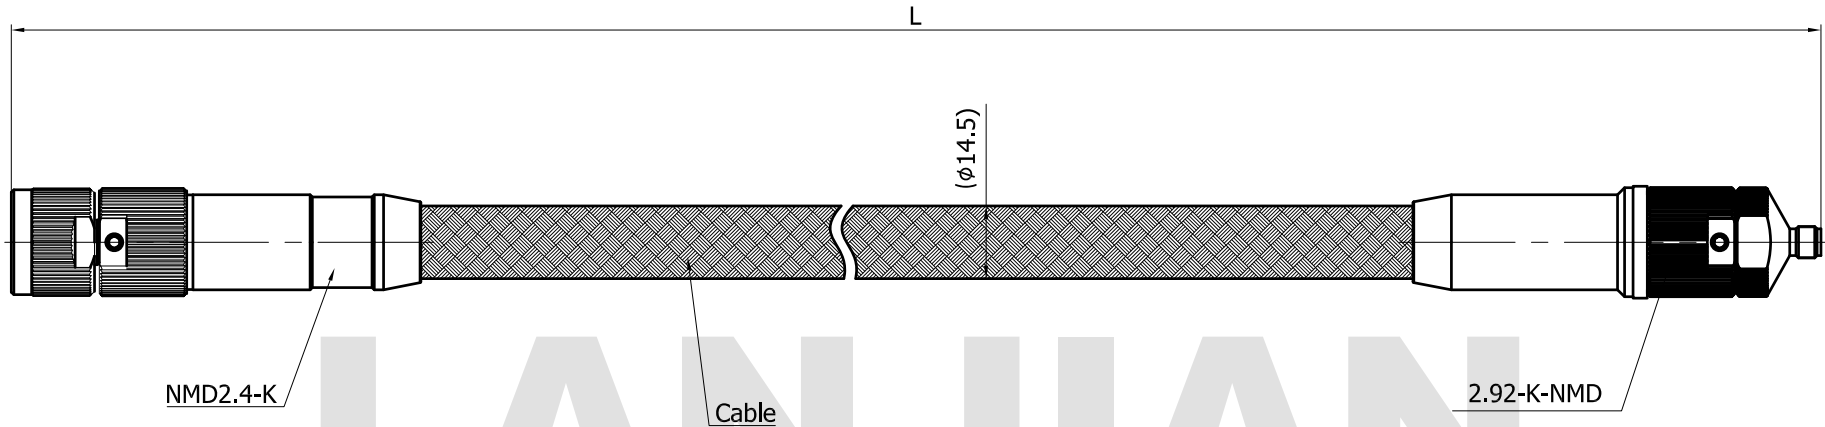

LANJIAN

MATERIAL:

BODY: STAINLESS STEEL
 CONTACT: BERYLLIUM COPPERBRASS
 INSULATOR: PEI

PERFORMANCE:

IMPEDANCE: 50 OHMS
 FREQUENCY: 50GHz
 VSWR: ≤ 1.30

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			LANJIAN ELECTRONICS 38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM				
	TOLERANCES :				
	X.X	± 0.20	ANGULAR : $\pm 1^\circ$	DEBURR AND BREAK SHARP EDGES	
	X.XX	± 0.10	FILLET'S R/C : ± 0.10		
	X.XXX	± 0.01	SURFACE FINISH : Ra 1.6		
		NAME	DATE	SIGNATURE	TITLE Z40SSPN-NMD2.4K/2.92K-NMD-L cable assembly
	DRAWN	X.C.W	08/18/2023		
	CHK'D	H.Z.Y	08/18/2023		
	APPV'D	H.Z.Y	08/18/2023		
MFG				DWG No.	REV. A
PROJECTION		SIZE	SCALE	DO NOT SCALE THE DRAWING	
		A3	3:1	PAGE 1 / 1	