



A-Series Roof Stairs

- Designed according to the following safety regulations: OSHA, ASAE, ANSI, NFPA, AS1657-2003
- Variable pitch design to accommodate roofs from 30° - 45°
- 30" x 11" step tread with a 6.8" - 9" rise between steps
- Designed for uniform transitions from the A-Series Roof Stairs to an A-Series Roof Deck

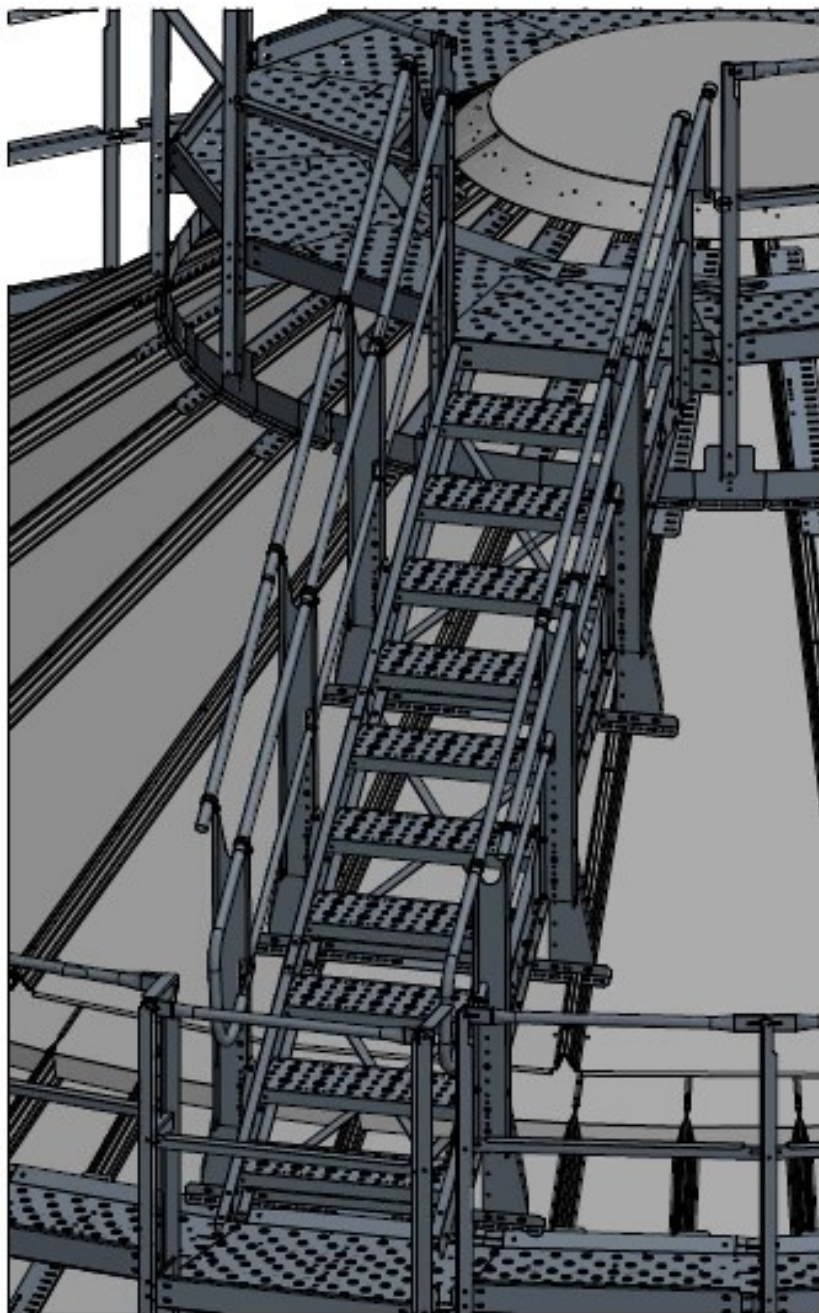

A-Series Roof Stairs

- Mounts to the top of the roof rib with 2 bolts per section
- 1 ½" tube handrail connected with a vinyl coated P clamp for smooth hand holds
- Handrail height is 36" - 38"
- 42" Guardrail is standard to meet OSHA regulations
- Can be used as a free-standing system to access a mezzanine or platform

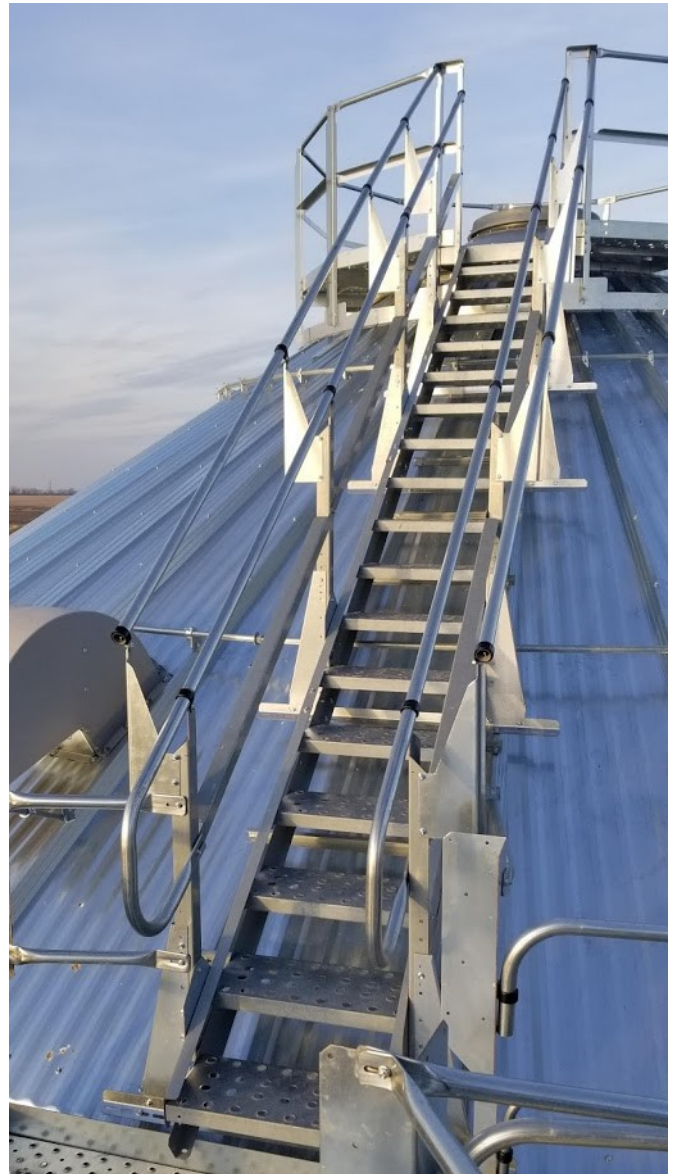

Greene Galvanized Stairs

41774 Main Street; PO Box 191

East Lynn IL 60932

Phone: 217-375-4244 Fax: 217-375-4245

Web: www.greenestairs.com

GREENE
GALVANIZED STAIRS