

- PARTITIONS

- OPERABLE WALLS

- ACCORDION DOORS

- UBC 8-2/NFPA 265/ CLASS A

HYTEXRIB®

- POLYESTER RECYCLED

POST-CONSUMER

ACOUSTICAL FABRIC

FOR VERTICAL SURFACES

COMMITMENT TO ENVIRONMENT

Creating premium fabrics from post-consumer recycled plastic bottles



PRODUCED FROM POST-CONSUMER RECYCLED POLYESTER FIBERS

• 100% RECYCLABLE • VOC FREE • ODS FREE • PVC FREE



HUF COR Inc.

P.O. Box 5591, 2101 Kennedy Rd.

Janesville, WI 53547

Tel: 608-756-1241 or 800-356-6968

FAX: 608-756-1246

Website: www.hufcor.com

Email: info@hufcor.com

Creating premium fabrics from post-consumer recycled plastic bottles

COMMITMENT TO ENVIRONMENT



PRODUCED FROM POST-CONSUMER

RECYCLED POLYESTER

RESINS AND FIBERS

- 100% RECYCLABLE
- VOC FREE • ODS FREE
- PVC FREE

ENGINEERED

ACOUSTICAL

FABRIC

FOR VERTICAL

SURFACES

UBC 8-2 / NFPA 265

H

Y

T

E


X

R

I

B[®]

QUICK SPECS

CONTENT	BACKING	FACE WEIGHT	WIDTH	ROLL SIZE	FLAMMABILITY
 Post-Consumer Solution dyed Polyester staple fiber	Fused Poly	24 ounces/ linear yard	54"	33 yards	Passes UBC #8-2 Class A/ASTM E-84 Passes NFPA 265



Fosshield[®] Antimicrobial Technology – silver & copper ions are incorporated into the polyester fiber and naturally attack microbes.





HYTEX RIB®



BEACH 19-87



CHAMPAGNE 24-54



FROTH 24-01



AMBER 24-15



ANTIQUÉ 24-11



OCHER 19-51



CHINESE CORAL 19-10



CREAM 19-07



TAFFY 19-17




FAWN 19-19


ACOUSTICAL FABRIC FOR VERTICAL SURFACES



PARCHMENT 24-03

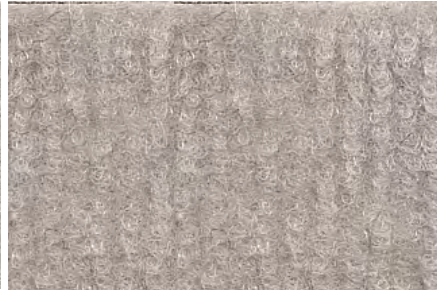

HAZEY DAY 24-07

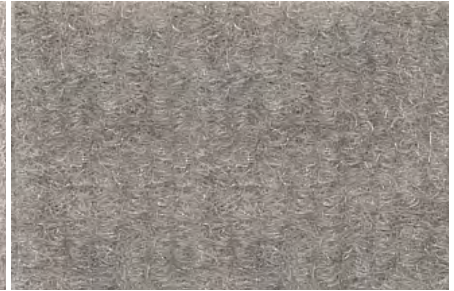

TAUPE 19-62



IVORY 19-02



MARBLE 19-61



OYSTER SHELL 24-12



LICHEN 24-25



BUTTERNUT TREE 24-27



PUMICE 19-28



PUTTY 19-53



COCOA 24-50



SANDALWOOD 19-08



SAGE 19-32




MIST 19-04




PEWTER 19-58

PARTITIONS • OPERABLE WALLS ACCORDION DOORS

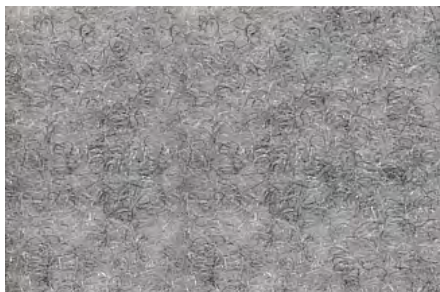


SILVER 19-16

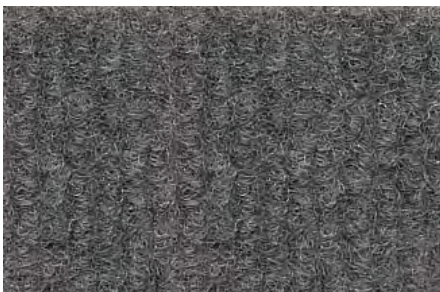


GUNMETAL GREY 24-06




AGEAN 19-93

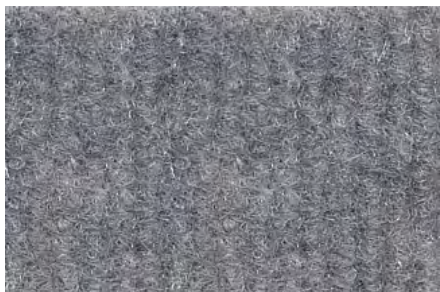

SLATE 24-14

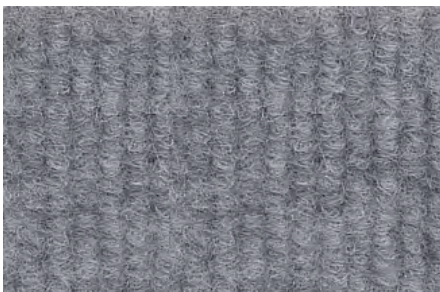

FLAGSTONE 19-22

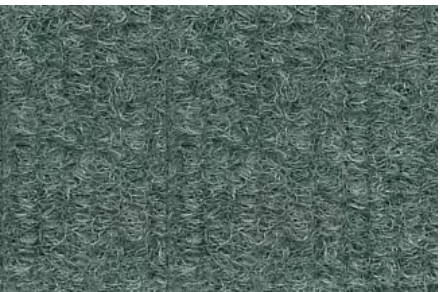


MOSS GREEN 19-15



CAMOUFLAGE 24-53



BLOODSTONE 24-20

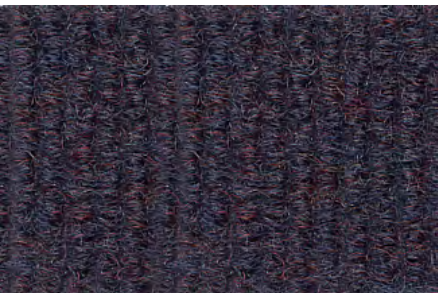

SAPPHIRE 24-19



SUMATRA 19-85




RUBY 24-23



NAVY 19-27



CHARCOAL 19-57

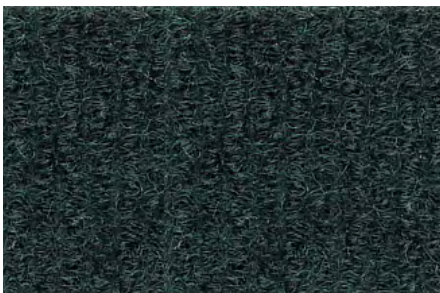

EMERALD 19-21



BLACK 19-33

HYTEXRIB®



ACOUSTICAL FABRIC FOR VERTICAL SURFACES PARTITIONS • OPERABLE WALLS • ACCORDION DOORS

A dimensional fabric produced with post-consumer recycled fiber offering exceptional performance, unmatched fade resistance, and a fire/smoke retardant Class A rating. It is lightweight and easy to install and maintain. HytexRib® is moisture resistant, mildew, rot, and bacteria resistant and is nonallergenic.

- **eco-fi** Polyester staple fiber. High strength fibers which are resistant to shrinking and stretching. Highly durable. 100% recycled content from water & soda bottles. Averages 90% post-consumer content.
- Easy to clean and maintain.
- Fiber does not absorb moisture.
- Acoustical qualities: NRC rating .25 per ASTM C423
- Velcro compatible, pill resistant.
- UL classification: Only Hytex needlepunch acoustical fabrics carry the UL label.
- Passes NFPA 265 Corner Burn Test. It is the standard test method for evaluating room fire growth contribution of Textile Wallcovering.
- Solution dyed. Resists sun, fading - colors are fast to most destructive agents.

APPLICATIONS

DESIGNERS	HEALTH CARE	HOSPITALITY	CORPORATE	INSTITUTIONAL	ENTERTAINMENT
Commercial Interiors Market	Retirement Facilities Nursing Homes Hospitals Nurses Stations	Ball Rooms Conference Rooms Meeting Rooms	Executive Conference Rooms General Offices	Schools (Auditorium) Government & Mass Trans. Buildings Day Care Centers	Theatres Recreational Centers

Acoustical Panels • Tack Boards • Elevators • Ceiling Tiles • Office Partitions • Chair Rails

SPECIFICATIONS

CONTENT	BACKING	WEIGHT	WIDTH	ROLL SIZE	FLAMMABILITY
eco-fi Post-Consumer Recycled Solution Dyed Polyester Staple Fiber	Fused Poly	24 ounces / face weight	54"	33 yards	Passes NFPA 265 Class A/ASTM E-84
NRC (ASTM C-423) .25 over gypsum board	MOISTURE REGAIN (ASTM D-2654) .5%	COLORFASTNESS TO LIGHT (AATCC-16A) Class 5 - 100 hours	ABRASION RESISTANCE (ASTM D-4158) Voluntary Prod. TS198 Full Commercial Serviceability		

Fosshield® Antimicrobial Technology – silver & copper ions are incorporated into the polyester fiber and naturally attack microbes. Fosshield® inhibits the growth of bacteria, mold and fungus, providing permanent protection. Ions bind to any microbes that may be present on the fiber and disable their critical functions (metabolism, respirations, and reproduction). Typical examples of microbes of common concern are Methicillin-resistant Staphylococcus aureus (MRSA), the Human rhinovirus (common cold), Streptococcus pyogenes (strep), Legionella pneumophila (Legionnaires disease), Human Coronavirus (SARS surrogate), and Feline Calicivirus (Norwalk virus). Fosshield® is the technology incorporated into the FDA cleared SpectraShield® 9500 N95 surgical respirator mask. In the FDA testing, Fosshield® began microbe prevention immediately and eliminated 99.99% of certain odor-causing bacteria after one hour of contact with the respirator surface.

UNDERWRITERS LABORATORIES INC.
CLASSIFIED WALLCOVERING SURFACE BURNING CHARACTERISTICS
 Applied to inorganic reinforced cement board with Sairmix-7 super duty high temperature mortar at an application rate of 55 square feet per gallon

Flame Spread 15	Smoke Developed 85
--------------------	-----------------------

NOTE: The numerical flame spread rating and other test results referenced herein are not intended to reflect hazards presented by this or any other material under actual fire conditions.

Installation and maintenance instructions are enclosed with every HytexRib® shipment and should be carefully read prior to installation. For best results, it is recommended that a qualified textile wallcovering installer be employed.



HYTEX®
HYTEX INDUSTRIES INC.
 58 YORK AVENUE, RANDOLPH, MA 02368-1828
 (781) 963-4400 • FAX (781) 986-5956
 WWW.HYTEX.COM