


**Sustainable Coils LLC**  
**Replacement Coil Solutions!**

**STOCK REPLACEMENT A-COIL**

Revision Date: 10/09/2023

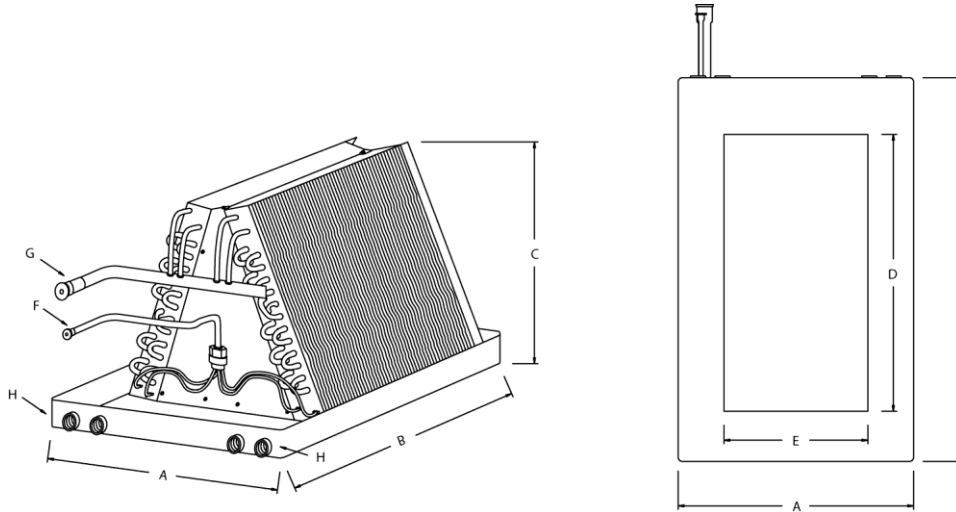

COIL MODEL	COIL WEIGHT	A	B	C	D	E	F	G	H
1024A13	20	13	19 1/2	10 1/2	15 1/2	5 1/2	3/8	3/4	3/4
1024A16	22	16	19 1/2	10 1/2	15 1/2	8 1/2	3/8	3/4	3/4
1036A13	25	13	19 1/2	14 1/2	15 1/2	5 1/2	3/8	3/4	3/4
1036A16	28	16	19 1/2	14 1/2	15 1/2	8 1/2	3/8	3/4	3/4
1036A20	30	20	19 1/2	14 1/2	15 1/2	12 1/2	3/8	3/4	3/4
1048A16	33	16	19 1/2	18 1/2	15 1/2	8 1/2	3/8	7/8	3/4
1048A20	35	20	19 1/2	18 1/2	15 1/2	12 1/2	3/8	7/8	3/4
1048A23	37	23	19 1/2	18 1/2	15 1/2	15 1/2	3/8	7/8	3/4
1060A20	41	20	19 1/2	22 1/2	15 1/2	12 1/2	3/8	7/8	3/4
1060A23	43	23	19 1/2	22 1/2	15 1/2	15 1/2	3/8	7/8	3/4

Low profile 3 row replacement coils

3/8" O.D., CU-122 60 helical copper tube, .016 back wall

2,500 PSI burst pressure minimum

Aluminum end plates to protect against rust corrosion

Aluminum fins spaced at 14 FPI for proper air flow in replacement applications

Plastic drain pans in popular widths; nylon resin is 5VFR rated and U.V. safe

Piston metered for R-410A application, additional R-22 piston available upon request

R-22 and R-410A expansion valve kits (loose or installed) available upon request

Pre-swaged refrigerant connections, shipped with dry nitrogen holding charge

Expanded IRV: 1024A=98.26, 1036A=137.56, 1048A=176.87, 1060A=216.17

Five year replacement warranty

Visit our website [www.SustainableCoils.com](http://www.SustainableCoils.com) for further information regarding our complete product line.

Telephone: (903) 881-6006

Fax: (903) 881-6008

email: [sales@SustainableCoils.com](mailto:sales@SustainableCoils.com)