


PALLET FORK ATTACHMENT



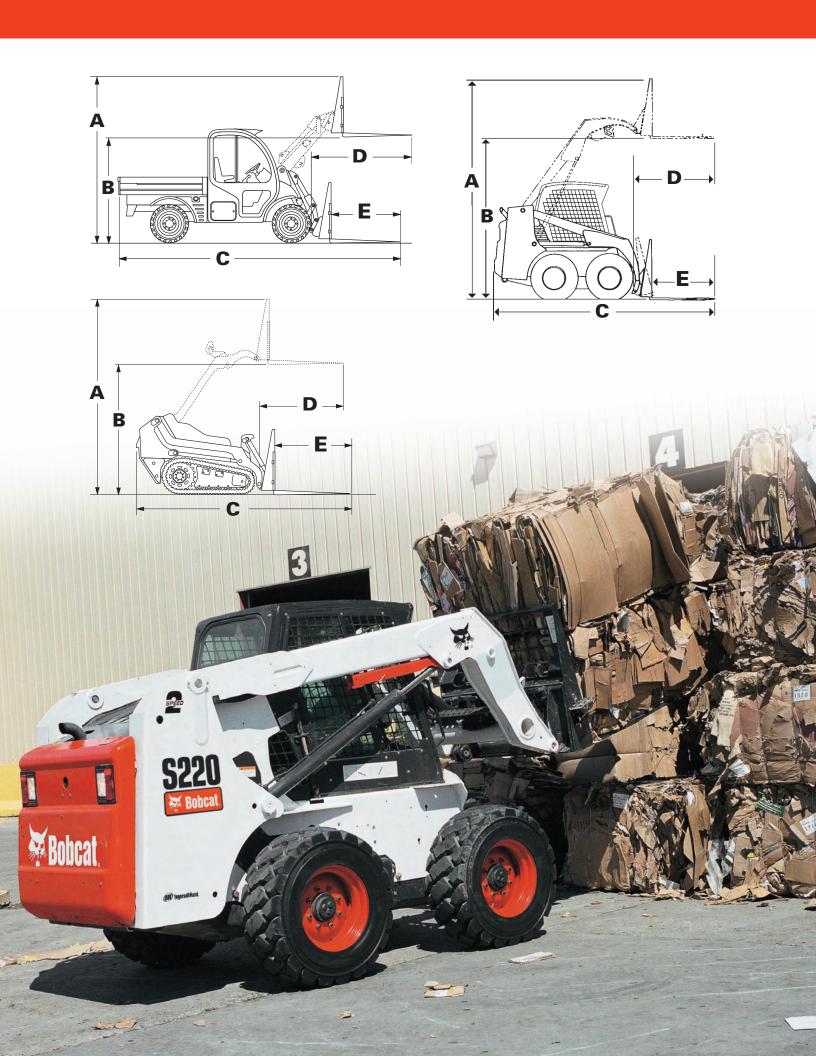

Specifications

PALLET FORK SPECIFICATIONS						
Frame	Frame Width	Frame Height	Frame Weight	Tooth Length	Tooth Wt. (set of 2)	Total Weight
Small	37 in.	34.5 in.	105 lb.	30 in. 36 in.	130 lb. 147 lb.	235 lb. 252 lb.
Standard	46 in.	39 in.	200 lb.	30 in. 36 in. 42 in. 48 in.	130 lb. 147 lb. 164 lb. 181 lb.	330 lb. 347 lb. 364 lb. 381 lb.
Heavy-Duty	60 in.	49 in.	470 lb.	42 in. 48 in.	214 lb. 238 lb.	684 lb. 708 lb.

SMALL PALLET FORK (with 36 in. teeth)					
Loader Size	A	В	C	D	E
MT52	101 in.	66 in.	110 in.	45 in.	36 in.
MT55	101 in.	66 in.	113 in.	51 in.	36 in.
463	124 in.	90 in.	120 in.	40 in.	36 in.

STANDARD PALLET FORK (with 48 in. teeth)					
Loader Size	Α	В	C	D	E
553	137 in.	98 in.	142 in.	55 in.	48 in.
S100	137 in.	98 in.	_	58 in.	48 in.
S130	142 in.	103 in.	150 in.	61 in.	48 in.
S150/S160	148 in.	109 in.	156 in.	57 in.	48 in.
S175/S185	151 in.	113 in.	156 in.	67 in.	48 in.
S205	151 in.	112 in.	156 in.	68 in.	48 in.
S220	156 in.	116 in.	169 in.	62 in.	48 in.
S250*	156 in.	123 in.	169 in.	70 in.	48 in.
T140	143 in.	104 in.	150 in.	61 in.	48 in.
T180	151 in.	109 in.	156 in.	57 in.	48 in.
T190	151 in.	112 in.	158 in.	68 in.	48 in.
5600-C	117 in.	77 in.	202 in.	79 in.	48 in.
5600-D	117 in.	79 in.	202 in.	78 in.	48 in.

HEAVY-DUTY PALLET FORK (with 48 in. teeth)					
Loader Size	Α	В	C	D	E
S220	167 in.	117 in.	169 in.	70 in.	48 in.
S250*	173 in.	123 in.	169 in.	78 in.	48 in.
S300*	171 in.	123 in.	172 in.	78 in.	48 in.
S330	171 in.	123 in.	172 in.	77 in.	48 in.
A300*	171 in.	123 in.	172 in.	78 in.	48 in.
T250	166 in.	117 in.	169 in.	70 in.	48 in.
T300/T320*	173 in.	123 in.	169 in.	78 in.	48 in.

^{*}Dimensions A and B will be 2 inches less on machines older than K-series







Bobcat® Hydraulic Pallet Fork

Specifications

HYDRAULIC PALLET FORK RATINGS WT. 24.00 in. 2700 lb. 1350 lb. (610 kg) 3000 lb 1680 lb. (760 kg)

HYDRAULIC PALLET FORK SPECIFICATIONS

Frame

Weight

383 lb.

Frame

Height

39 in.

Frame

Width

48 in.

Frame

Hydraulic

3 - 1 - 7		
900 lb.	360 lb.	(160 kg)
1300 lb.	550 lb.	(250 kg)
1500 lb.	655 lb.	(295 kg)
1700 lb.	845 lb.	(380 kg)
1900 lb.	990 lb.	(450 kg)
2100 lb.	1050 lb.	(475 kg)
2300 lb.	1150 lb.	(520 kg)
2500 lb.	1250 lb.	(565 kg)

Tooth

Lengths

42 in.

48 in.

Tooth Wt.

(set of 2)

164 lb.

181 lb.

Total

Weight

547 lb.

564 lb.

- · Adjust fork spacing with fingertip controls inside the cab
- Two hydraulic cylinders adjust outside spacing width from 40.25 in. to 12 in.
- Two sizes of forks to choose from: 42 in. and 48 in.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

The Bobcat Attachments Advantage: Bobcat attachments are engineered and manufactured to fit Bobcat loaders for optimum job performance, dependability and durability.



Bobcat Pallet Fork Attachment fits these carrier models:

Mini Track Loaders: MT52 MT55

Skid-Steer Loaders:

S100 S130 S150 **S160**

S185 S205

S220 S250 S300 S330

Compact Track Loaders: T140

T180 T190 T250 T300 T320

All-Wheel Steer Loaders: A300

Utility Work Machine: 5600

Bobcat Hydraulic Pallet Fork Attachment fits these carrier models:

Skid-Steer Loaders:

S130 S150 **S160**

S185

S205 S220 S250

S300 S330

Compact Track Loaders:

T140 T180 T190

T250 T300 T320

All-Wheel Steer Loaders: A300

