


# PRODUCT DATA SHEET

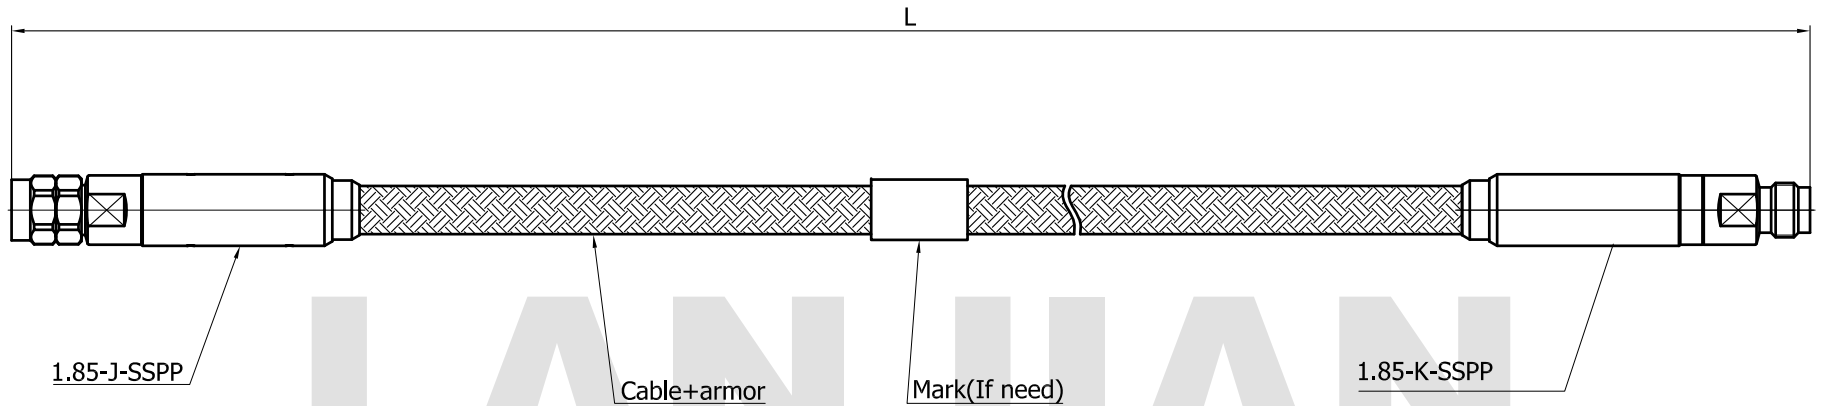

LANJIAN

**MATERIAL:**

BODY: STAINLESS STEEL  
 CONTACT: BERYLLIUM COPPERBRASS  
 INSULATOR: PEI

**PERFORMANCE:**

IMPEDANCE: 50 OHMS  
 FREQUENCY: 65GHz  
 VSWR: ≤1.35  
 OPERATING TEMPERATURE: -40°C~+150°C  
 MINIMUM BEND RADIUS: 28.6mm (INSTALLATION)

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM				
	TOLERANCES :				
	X.X	±0.20	ANGULAR : ±1°		DEBURR AND BREAK SHARP EDGES
	X.XX	±0.10	FILLET'S R/C : ±0.10		
	X.XXX	±0.01	SURFACE FINISH : Ra 1.6		
	NAME	DATE	SIGNATURE		
DRAWN	X.C.W	09/28/2020			
CHK'D	H.Z.Y	09/28/2020			
APP'V'D	H.Z.Y	09/28/2020			
MFG					
PROJECTION		SIZE	SCALE	TITLE <b>Z3506SSPP-1.85J/1.85K-L</b> cable assembly	
		A3	1:1		
DO NOT SCALE THE DRAWING				REV. <b>A</b> PAGE 1 / 1	