

Please Print This Page and have all operators read the instructions before using your Lumber Buddy™ portable workstation.

Assembly Instructions

Tools required: Two 15/16” wrenches

1. Remove all packaging from your Lumber Buddy™ unit.
2. To attach the feet to your Lumber Buddy™ unit, lift your unit using a forklift to a comfortable working height.
3. Depending on the unit you have received, your legs will be one of two places:




8LB18N unit:
feet will be located in each of the extension pockets.



8LB18NEXT unit:
feet will be located two in each side extension.


4. Slide a leg upward into the square tube on each corner of your Lumber Buddy™ unit.

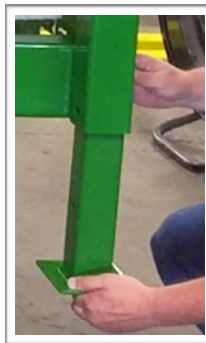

5. Insert a bolt and secure tightly with the washer and nut using your wrench.



6. Remove hardware for uprights transported in a bundle on top of your unit. Remove uprights (shown above) to attach to the top of your Lumber Buddy™ unit.

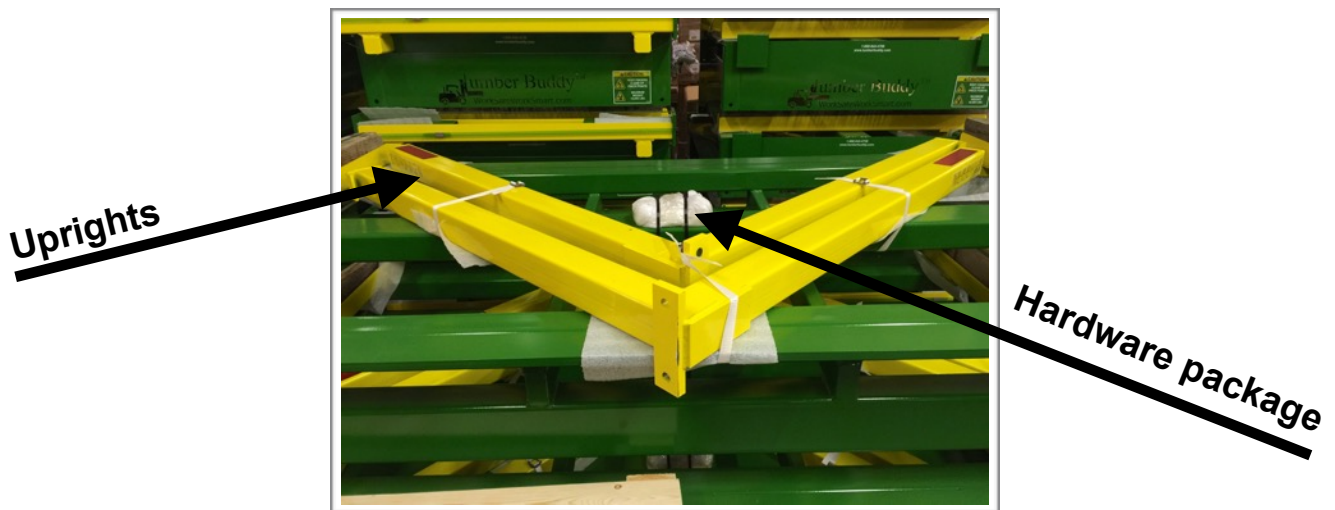

(Repeat the last two steps until all four (4) legs are attached to your unit)

7. Place the upright at the desired position on the platform sliding the front notch over the lip at the front of the base. Then nest the back plate squarely on the back of the unit.



8. For maximum clearance, position the upright with bottom plate flush with inside of the leg.



9. Make sure the upright is square on the base unit (parallel to the ends of the platform) at your desired location.

10. Tighten bolts securely.



11. Do a final check of all parts to ensure that all bolts are securely tightened and all pins are in place.

12. Review instructions for safe operations of your Lumber Buddy™ productivity platform.

13. Instructions and other documentation are available at LumberBuddy.com or by calling 888-844-4708.

Direct: 417-661-4386

Fax: 253-590-2875

Email: info@worksafeworksmart.com

Toll Free: 888-844-4708