


INSTRUCTIONS D'TTACH DETHATCHER WHEEL KIT (DTWK)

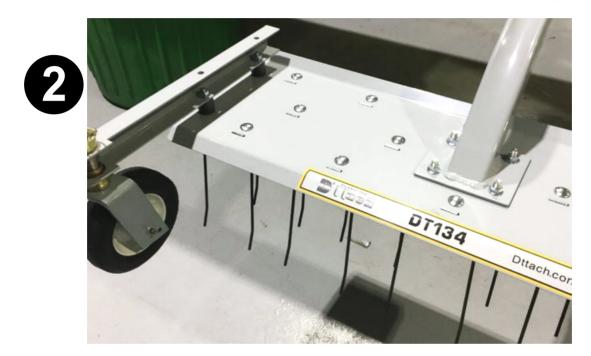

Install the DT Series Dethatcher attachment and lower to the operating position.

Align and install wheel assembly #2 on the *right side of the dethatcher using carriage bolts (as pictured above).

The head of the bolt should be under the dethatcher plate and feed through the grey spacer between the dethatcher plate and caster arm. Secure the caster arm with a flange nut using a 9/16 wrench.

Repeat on *left side using assembly #1.

*mentioned right & left is always referred to as the operator

**position of caster assemblies 1 & 2 may vary upon position of installer. Open sides of assemblies should face each other.

Visit www.dttach.com/support.html

for Product Support, IPL's, Product Literature, Instructions & Tutorial Videos D'ttach MFG 83-A Comsewogue Rd, E. Setauket, NY 11733 631-642-7445

