



Sheet size:




A	49 1/2" (1260 mm) max.
	19 3/4" (500 mm) min.
B	36 1/4" (920 mm) max.
* ₁	35 3/4" (907 mm) max.
	13 7/8" (350 mm) min.

Cutting size:




C	49 3/16" (1250 mm) max.
D	35 7/16" (900 mm) max.

Gripper margin:

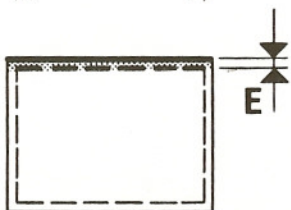


E	25/64" - 11/16" (10-18 mm) form "up"
	1/2" - 3/4" (12-19 mm) form "down"
* ₁	7/32" - 7/16" (5,5-11,5 mm)

Die-cutting material:

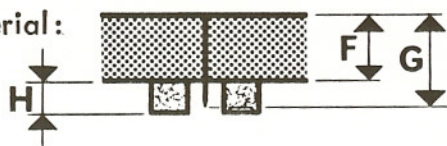

F	45/64" (18 mm)
G	15/16" (23,8 mm)
H	17/64" (7 mm)

Stripping material:

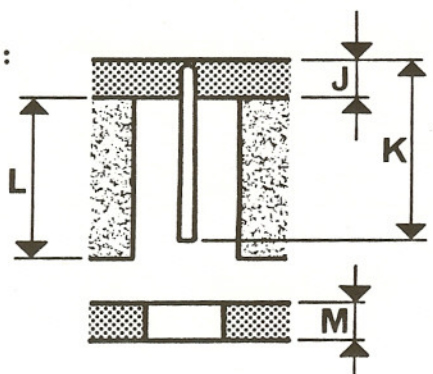

J	5/8" (15 mm)
K	2" (50 mm)
L	1 1/2" - 1 9/16" (37 - 40 mm)
M	25/64" (10 mm)

Die-cut material:

paper
paperboard
B-flute

	.004" (90 g/m ²) min.
	.060" (1,5 mm) max.
* ₂	.120" (3 mm) max.

Unit data:

power of main drive motor
total connected load
total connected load
net weight

	11 HP
	26 KVA
* ₃	48 KVA
	42'000 lbs. (19'000 kg) approx.

Performance:



guaranteed impression strength
production speed

	550 US tons max.
	5000 s/h max.

* Special equipment:

- 1) machine modified for stripping without gripper margin
- 2) machine modified for stripping corrugated board
- 3) machine SP 1260-EGC for hot embossing

PLAN D'ENCOMBREMENT - SPACE REQUIREMENTS - PLATZBEDARF

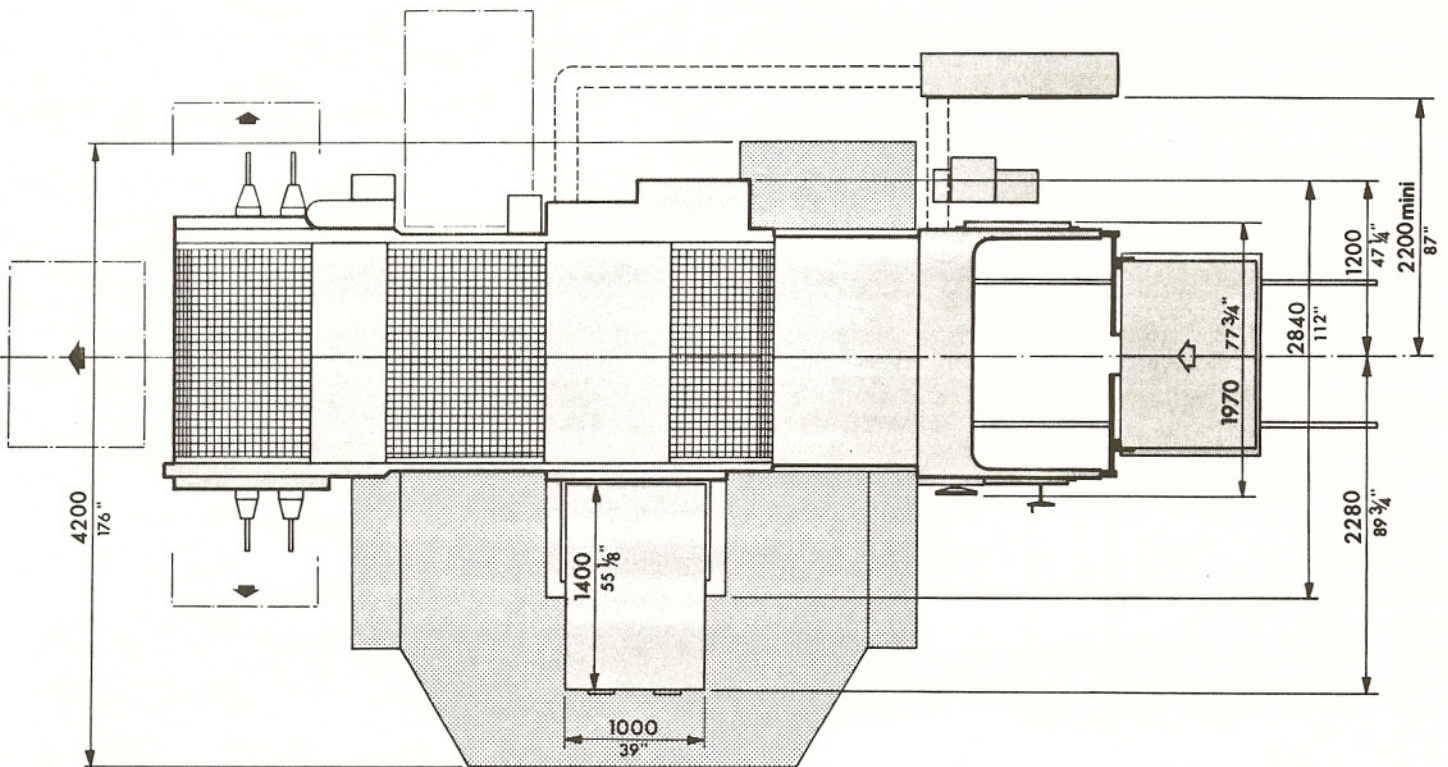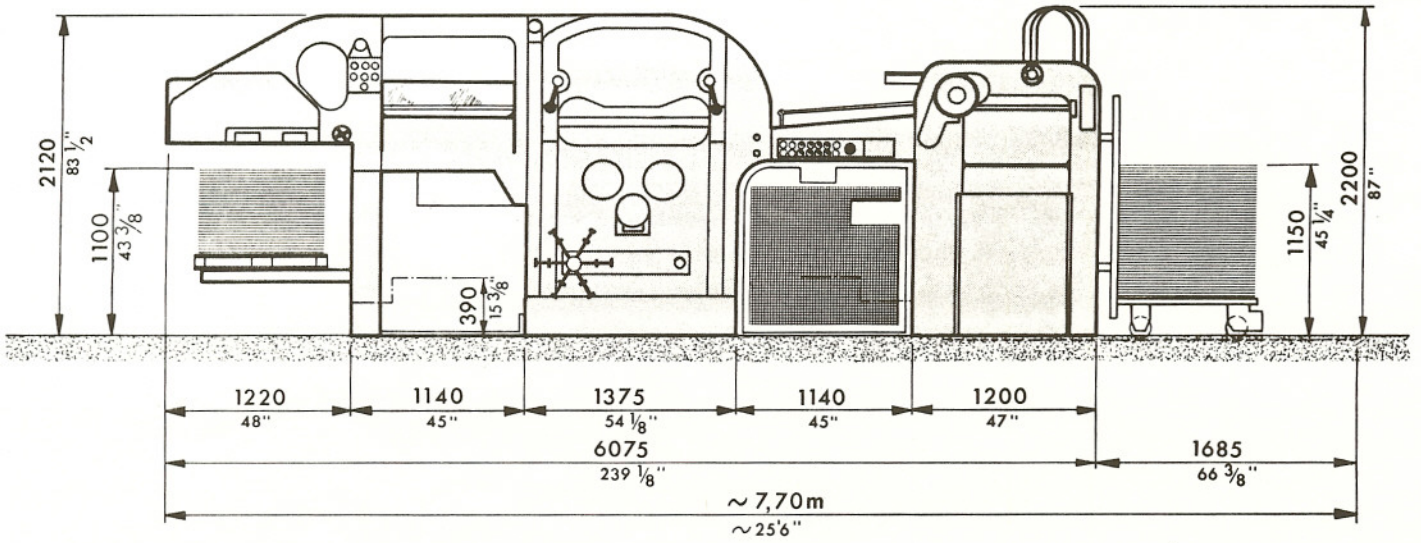

SP 1260-E