

HORIZONTAL MASTER TESTER

WHEN IT'S YOUR RESPONSIBILITY TO BE RIGHT, BE RIGHT.




CAPACITIES: 200 LB.IN. TO 600 LB. FT.

RS-232 OUTPUT OF READINGS

FEATURES AND BENEFITS

- NTEP certified Class II/III electronics deliver NIST certified accuracy that is unmatched in horizontal master testers with 10,000,000 counts and 10 display updates per second
- The sturdy welded steel plate construction of the mechanical subassembly delivers many years of dependable service
- Software interface is easy to use and optimized for fast, efficient calibration of torque wrenches
- Unit is easy calibrated to stated accuracy with Precision Instruments' test bars and Class F test weights
- Displays in units of lb.ft., lb.in., oz.in., N·m, kg·m, and kg·com.
- Made in the USA

Electronic testers from Precision Instruments offer superb accuracy and flexibility in an easy to use package. The vertical and horizontal testers utilize NIST electronics to ensure compliance with calibration traceability standards. Plus, RS-232 output of readings allows the unit to be integrated into applications that customers develop. The TMH600F horizontal tester includes three transducers in 200 lb.in., 100 lb.ft. and 600 lb.ft. capacities.

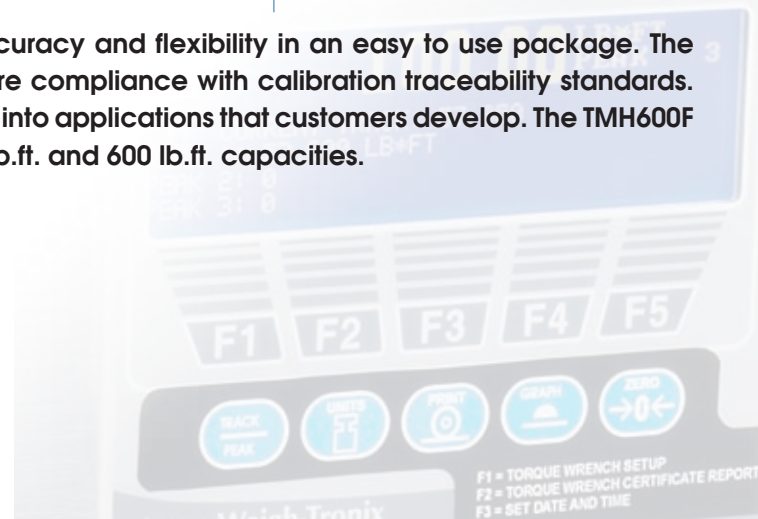

HORIZONTAL and VERTICAL MASTER TESTER

TRANSDUCERS FOR USE WITH THE TMH LOADER			
Stock Code	Capacity	Female sq. dr. inches	Length, inches
TT2F200H	200 lb.in.	3/8	5 1/2
TT3F100F	100 lb.ft.	1/2	5 1/2
TT4F600F	600 lb.ft.	3/4	5 1/2

Special scales not listed may be available upon request. Please contact your Precision Instruments' sales representative for more information. For more detailed information regarding specifications, dimensions, etc., please consult our website at: www.torqwrench.com.

VERTICAL MASTER TESTER



The TMV5F1000F 1,000 lb.ft. Vertical Master Tester.

Precision Instruments' digital test equipment meets every need for the most demanding calibration requirements.

VERTICAL MASTER TESTERS					
Stock Code	Capacity	Female sq. dr. inches	Depth, inches	Width, inches	Height, inches
TMV3F100H	100 lb.in.	1/2	21	27	37 1/2
TMV3F50F	50 lb.ft.	1/2	21	27	37 1/2
TMV5F1000F	1000 lb.ft.	1	25	36	72
TMV6F2000F	2000 lb.ft.	1 1/2	25	48 1/2	72
TMV6F5000F	5000 lb.ft.	1 1/2	30	65	79

Special scales not listed may be available upon request. Please contact your Precision Instruments' sales representative for more information. For more detailed information regarding specifications, dimensions, etc., please consult our website at: www.torqwrench.com.

CAPACITIES: 100 LB.IN. TO 5,000 LB.FT.
ACCY: 0.25 & 0.01% CLOCKWISE & COUNTERCLOCKWISE