

Premier Industries Inc

(Fax:605-356-8072) Cell: Wayne:712-251-7186 Korey:712-223-7859 Sheena:712-212-1432


Email: wayne@premierindinc.com; sales@premierindinc.com; sheena@premierindinc.com

HS-K2 Series

High Bright LED Linear High Bay



HS-HB200W-K2 (4 modules)

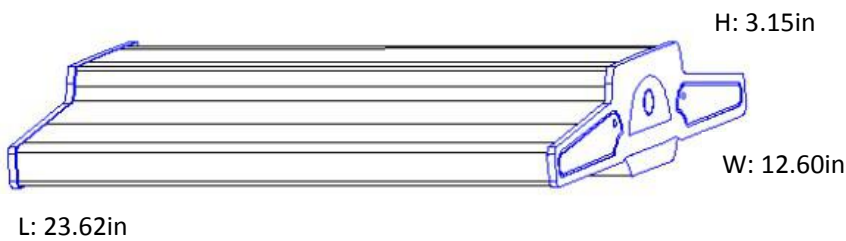

All Dimensions are in[inches]


Electro-Optical Characteristics

Features

Input Voltage(typ)	AC100-277V
Tested@(Voltage)	120Vac
Power Consumption	200w
Current Consumption	3.3A
Efficacy:(Lm/w)	170
Lumens	34000lm
Total Ft-Cd	-cd
Power Factor	0.95
CRI(Ra)	80
CCT	3000-6500K
Viewing Angle	60/90/120°
LED source	PHILIPS 3030Leds

Operating Temperature	-40°C to +55°C
Dimmable	YES (0-10V)
Housing Material	high heat-conducting aviation aluminum
Lens Material	PC
Housing Color	White/Black
Driver	MEANWELL
Protection Rating	IP66
Warranty	7Years
SMD LED/Qty.	308pcs
Net weight	6.5kg
Outer carton size(cm)	68.5*37.5*15cm
G.W per ctn	8.4kg

HS-HB250W-K2 (4 modules)

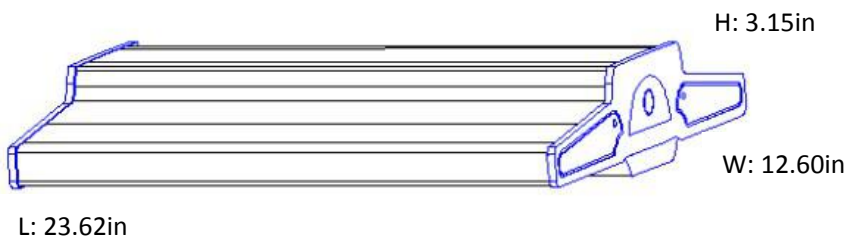

All Dimensions are in[inches]

Electro-Optical Characteristics

Features

Input Voltage(typ)	AC100-277V
Tested@(Voltage)	120Vac
Power Consumption	250w
Current Consumption	3.3A
Efficacy:(Lm/w)	170
Lumens	42500lm
Total Ft-Cd	-cd
Power Factor	0.95
CRI(Ra)	80
CCT	3000-6500K
Viewing Angle	60/90/120°
LED source	PHILIPS 3030Leds

Operating Temperature	-40°C to +55°C
Dimmable	YES (0-10V)
Housing Material	high heat-conducting aviation aluminum
Lens Material	PC
Housing Color	White/Black
Driver	MEANWELL
Protection Rating	IP66
Warranty	7Years
SMD LED/Qty.	308pcs
Net weight	6.5kg
Outer carton size(cm)	68.5*37.5*15cm
G.W per ctn	8.4kg

HS-HB300W-K2 (6 modules)



H: 3.15in



L: 35.43in

W: 12.60in

All Dimensions are in[inches]



Electro-Optical Characteristics

Features

Input Voltage(typ)	AC100-277V
Tested@(Voltage)	120Vac
Power Consumption	300w
Current Consumption	3.3A
Efficacy:(Lm/w)	170
Lumens	51000lm
Total Ft-Cd	-cd
Power Factor	0.95
CRI(Ra)	80
CCT	3000-6500K
Viewing Angle	60/90/120°
LED source	PHILIPS 3030Leds

Operating Temperature	-40°C to +55°C
Dimmable	YES (0-10V)
Housing Material	high heat-conducting aviation aluminum
Lens Material	PC
Housing Color	White/Black
Driver	MEANWELL
Protection Rating	IP66
Warranty	7Years
SMD LED/Qty.	462pcs
Net weight	9.5kg
Outer carton size(cm)	98.5*37.5*15cm
G.W per ctn	11kg

HS-HB360W-K2 (6 modules)

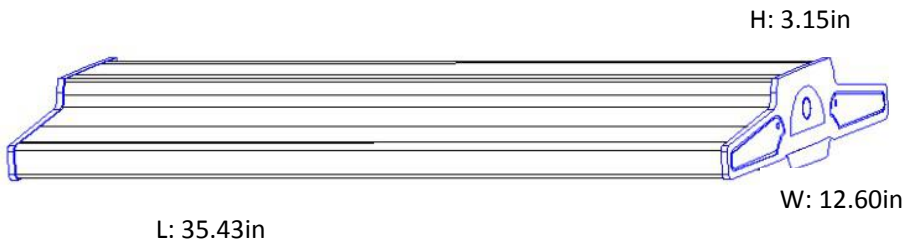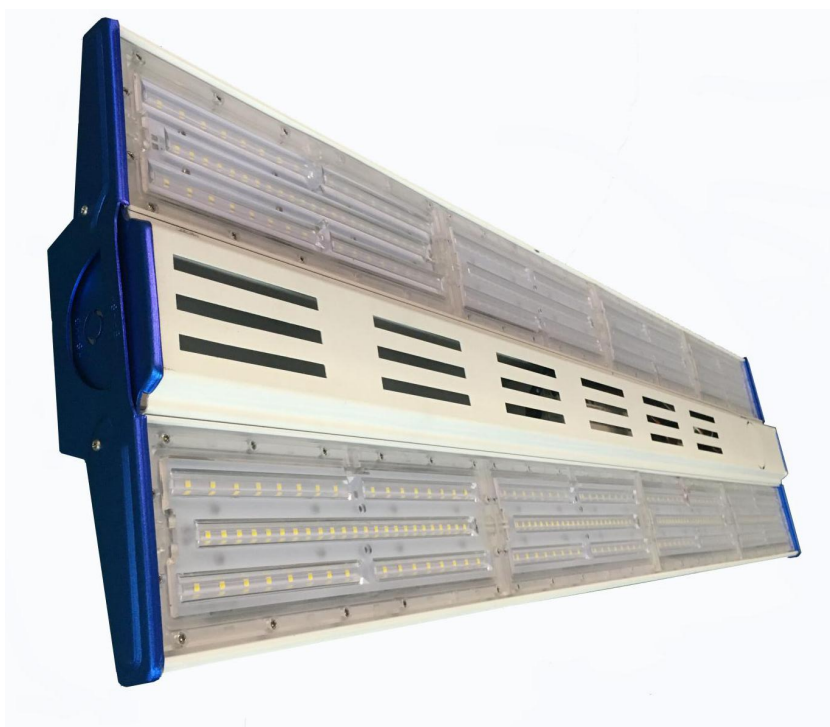

All Dimensions are in[inches

○ Electro-Optical Characteristics

Input Voltage(typ)	AC100-277V
Tested@(Voltage)	120Vac
Power Consumption	360w
Current Consumption	3.3A
Efficacy:(Lm/w)	170
Lumens	61200lm
Total Ft-Cd	-cd
Power Factor	0.95
CRI(Ra)	80
CCT	3000-6500K
Viewing Angle	60/90/120°
LED source	PHILIPS 3030Leds


○ Features

Operating Temperature	-40°C to +55°C
Dimmable	YES (0-10V)
Housing Material	high heat-conducting aviation aluminum
Lens Material	PC
Housing Color	White/Black
Driver	MEANWELL
Protection Rating	IP66
Warranty	7Years
SMD LED/Qty.	462pcs
Net weight	9.5kg
Outer carton size(cm)	98.5*37.5*15cm
G.W per ctn	11kg

HS-HB400W-K2 (8 modules)



H: 3.15in



L: 47.24in

W: 12.60in

All Dimensions are in[mm]


○ Electro-Optical Characteristics

Input Voltage(typ)	AC100-277V
Tested@(Voltage)	120Vac
Power Consumption	400w
Current Consumption	0.83A
Efficacy:(Lm/w)	170
Lumens	68000lm
Total Ft-Cd	-cd
Power Factor	0.95
CRI(Ra)	80
CCT	3000-6500K
Viewing Angle	60/90/120°
LED source	PHILIPS 3030Leds

○ Features

Operating Temperature	-40°C to +55°C
Dimmable	YES (0-10V)
Housing Material	high heat-conducting aviation aluminum
Lens Material	PC
Housing Color	White/Black
Driver	MEANWELL
Protection Rating	IP66
Warranty	7Years
SMD LED/Qty.	616pcs
Net weight	12.3kg
Outer carton size(cm)	128*37.5*15cm
G.W per ctn	14.4kg

HS-HB500W-K2 (8 modules)

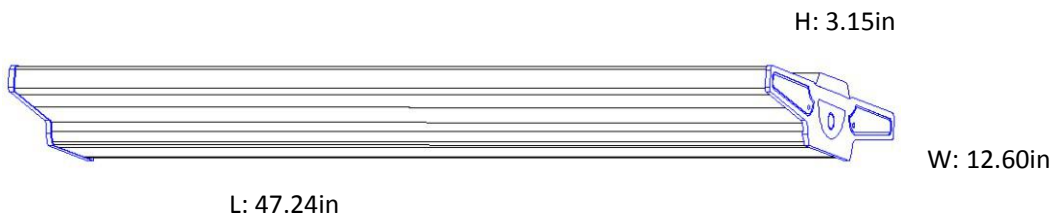

All Dimensions are in[inches]

Electro-Optical Characteristics

Input Voltage(typ)	AC100-277V
Tested@(Voltage)	120Vac
Power Consumption	500w
Current Consumption	0.83A
Efficacy:(Lm/w)	170
Lumens	85000lm
Total Ft-Cd	-cd
Power Factor	0.95
CRI(Ra)	80
CCT	3000-6500K
Viewing Angle	60/90/120°
LED source	PHILIPS 3030Leds

Features

Operating Temperature	-40°C to +55°C
Dimmable	YES (0-10V)
Housing Material	high heat-conducting aviation aluminum
Lens Material	PC
Housing Color	White/Black
Driver	MEANWELL
Protection Rating	IP66
Warranty	7Years
SMD LED/Qty.	616pcs
Net weight	12.3kg
Outer carton size(cm)	128*37.5*15cm
G.W per ctn	14.4kg