



FACTORY LEDS

Panel Series




2x4, 2x2 and 1x4 FT

- ◆ Damp Rated
- ◆ CRI Ra80
- ◆ CCT 4000K, 5000K
- ◆ 120– 347 VAC
- ◆ -25 to +40 C Operating T.
- ◆ 5 years warranty
- ◆ 1.8 inch height
- ◆ 0-10V Dimming (recommended dimmers, DIVA-DTV Lutron, IP710-DL Leviton)
- ◆ THD<20%
- ◆ Power Factor >.90
- ◆ 50,000 Hrs, L70

Part Number	PAN-6KLM50	PAN-4KLM40	PAN-4KLM40
Lumen Output	5,500 LM	4,400 LM	4000 LM
Wattage	50W	40W	40W
Luminous Efficacy	110 LM/W		
Size	2x4 ft (47.7x23.7In)	2x2 ft (23.7x23.7In)	1x4 ft (47.7x11.7In)
Weight (CTN)	12.kg (2)	9kg (2)	9kg (2)
Beam Angle	120 °		
Certification	cULus, DLC, CE RoHS		



Ordering Info	Part Number	CCT
Default	PAN-XXXXXXX	4000K
EG. PAN-6KLM50-4K		5000K

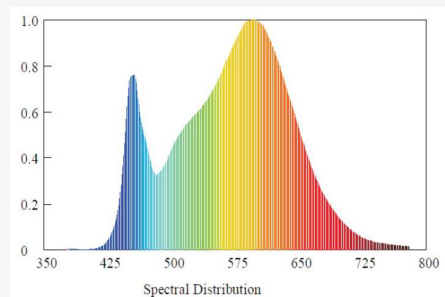

2x4 Panel Photo Luminance

	Illuminance at a Distance	
	Center Beam LUX	Beam Width
8.3ft	290.43 LUX	25.3ft 24.7ft
16.7ft	72.61 LUX	50.7ft 49.4ft
25.0ft	32.27 LUX	76.0ft 74.1ft
33.3ft	18.15 LUX	101.4ft 98.8ft
41.7ft	11.62 LUX	126.7ft 123.5ft
50.0ft	8.07 LUX	152.0ft 148.2ft

■ Vert. Spread: 113.3° ■ Horiz. Spread: 112.0°

Factory LED Lights Inc.

Head Office: 276 Sunset Point, Cochrane AB T4C0K9
www.factoryleds.com vic@factoryleds.com

(587)-333-1832 Canada
(214)-396-2232 USA



FACTORY LEDS