

Specifications


Frequency range: DC-4GHz

Nominal Impedance: 50 Ohm

VSWR: 1 .20:1 max. @ 4 GHz

Oper. Temperature range ; -65C- +125C

RoHS Compliant

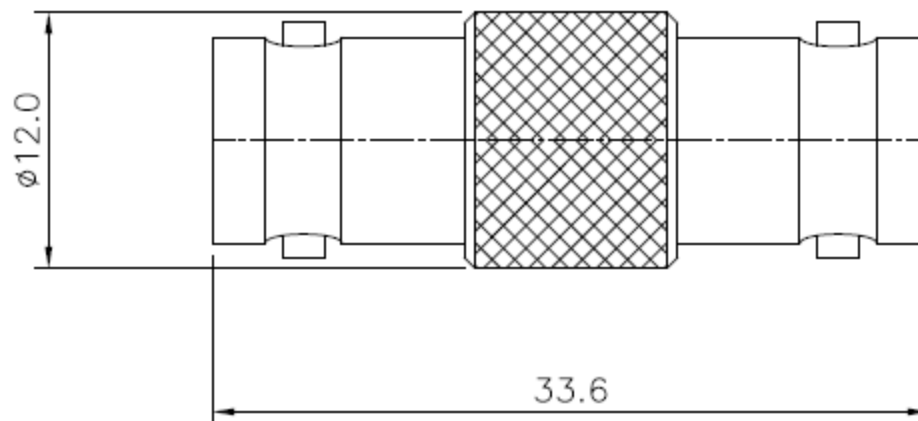

Adapter Part

Material

Plating

Body	Brass	Nickel
Center contact	Beryllium Copper	Gold
Insulator	PTFE	N/A



Premier RF

17 Roslyn CT
Patchogue, NY 11772
PH: 631-447-3804
sales@premierRF.com
www.premierRF.com

Dimensions in mm	PART NUMBER	PRF-AD3F3F
11/04/2012	DESCRIPTION	BNC FEMALE TO BNC FEMALE ADAPTER, DC-4 GHz
APPROVED		
C. Smith		