


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

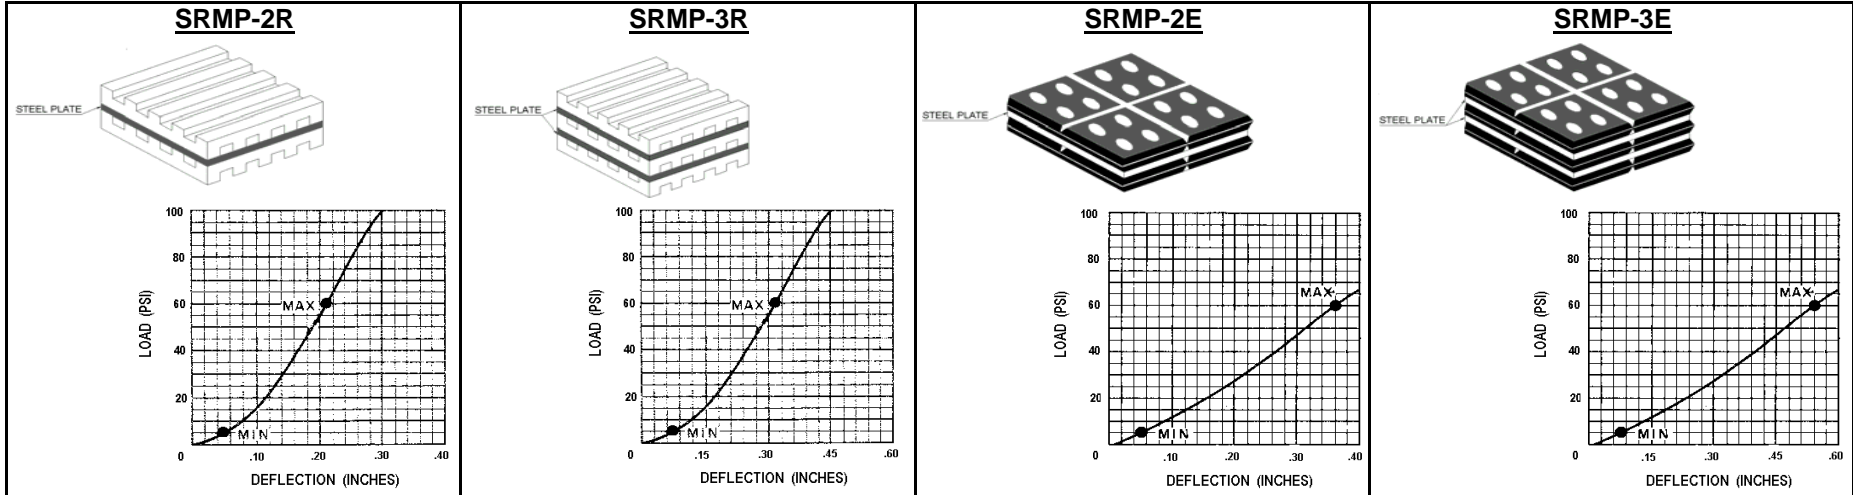

APPLICATION

* Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)

NOTES

1. Material: Special Rubber
2. Maximum loading: 60 lbs/sq.in.
3. Working range: 15 to 55 lbs/sq.in.

FEATURES

- * Alternate High-Low rib construction or exclusive "waffle pad" design with inbuilt suction cups provide excellent gripping properties.
- * No bolting required.
- * Simple field installation.

MODEL	SIZE (inches)
SRMP-2R 0606	6" x 6" x 13/16"
SRMP-2R 0404	4" x 4" x 13/16"
SRMP-2R 0303	3" x 3" x 13/16"
SRMP-3R 0606	6" x 6" x 1 1/4"
SRMP-3R 0404	4" x 4" x 1 1/4"
SRMP-3R 0303	3" x 3" x 1 1/4"
SRMP-2E 0606	6" x 6" x 1 9/16"
SRMP-2E 0404	4" x 4" x 1 9/16"
SRMP-3E 0606	6" x 6" x 2 3/8"
SRMP-3E 0404	4" x 4" x 2 3/8"

<u>Notes / Remarks :</u>	Project :	Title : SRMP Steel-Rubber Mounting Pad	<u>Drawing no.</u> S-2200.31
	Client :		
	Consultant :		
	Representative :		
			Rev. 1