


Sustainable Coils LLC

Replacement Coil Solutions!

MOBILE HOME COILS

Revision Date: 10/09/2023

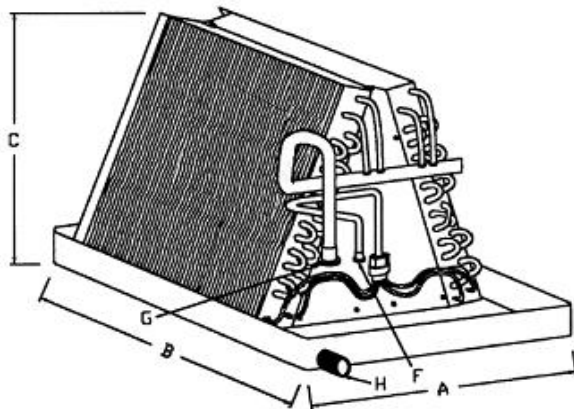

COIL MODEL	COIL WEIGHT	A	B	C	F	G	H
1024A-MH	24	18	19 1/2	16 1/2	3/8	3/4	3/4
1036A-MH	30	18	19 1/2	14 1/2	3/8	3/4	3/4
1036A-FED/FEV	34	15 3/4	20 5/8	14 1/2	3/8	3/4	3/4
1048A-MH	36	18	19 1/2	18 1/2	3/8	7/8	3/4
1048A-FED/FEV	40	15 3/4	20 5/8	18 1/2	3/8	7/8	3/4
1064A-MH	41	18	19 1/2	18 1/2	3/8	7/8	3/4
1448A-MH+4X4	36	18	19 1/2	18 1/2	3/8	7/8	3/4
1449A-MH+4X4	42	18	19 1/2	18 1/2	3/8	7/8	3/4

- Hairpin Tube:** 3/8" O.D., CU-122 60 helical copper tube, .016 back wall
2,500 PSI burst pressure minimum
- Rows/FPI:** 2 rows, 14 FPI: 1024A-MH
3 rows, 14 FPI: 1036A-MH, 1048A-MH, 1448A-MH4X4
1036A-FED/FEV, 1048A-FED/FEV
4 rows, 12 FPI: 1064A-MH, 1449A-MH+4X4
- End Plates:** Aluminum
- Metering:** Piston metered for R-410A refrigerant, additional R-22 piston optional
1448A-MH+4X4, 1049A-MH+4X4 includes factory installed R410A TXV
- Refrigerant connections:** Pre-swaged
- Expanded IRV (cu. In.):** 1024A=104.81, 1036A=137.56, 1048A=176.87, 1064A=235.82
1448A-MH+4X4=176.87, 1449A-MH+4X4=235.82
- Drain Pan:** Nylon resin pans are 5VFR rated and U.V. safe
FED/FEV drain pans are metal
- Holding Charge:** Dry nitrogen
- Warranty:** Five year replacement

Please visit our website www.SustainableCoils.com for further information regarding our complete product line.

Telephone: (903) 881-6006

Fax: (903) 881-6008

email: sales@sustainablecoils.com