


ORDERING INFORMATION:

The attenuator can be ordered with different foil configurations. Please use the codes provided below when ordering. Please call or e-mail to ask about any other customization required.

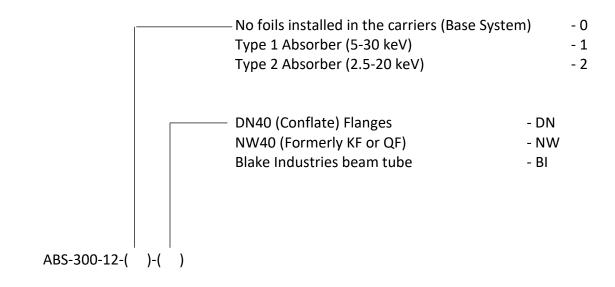

For example, a chamber configured for 5-30 keV with DN40 flanges would be denoted by: ABS-300-12-1-DN