



Kim AR Archetype w/o Sensor



Kim AR Archetype with Sensor

Specifications

- Wattage - 48W/56W/84W
- Weight - 15 lbs
- Input Total Power - 56W/62W/92W
- Lumens - 4968/5867/7932@4500 Kelvin
- Luminated Area - 20ft: 85ft x 85ft ;24ft : 118ft x 118ft ; 30ft : 138ft x 138ft
- Illuminance Uniformity - >0.6
- Input Voltage - 110/115-220/277/480
- Input Voltage - ≥90%
- Current - Single 325 mA
- Meanwell Drivers - HLG-60H/HLG-120H
- LED Single Power - 1W/1.5W
- Lumen Per Watt - ≥110Lm/W
- Environmental Temperature - 95F~122F
- Lamp Temperature - <122F
- Efficiency - >90%
- CRI - >70
- Power Factor - >0.95
- IP - IP65

Features

- Custom LED retrofit kit for the Kim AR Archetype Series fixtures.
- Five Kelvin options to choose from: 3000k or 3500k, 4000k or 4500k, 5000k for allowing the best choice for each application.
- Retrofit kit comes completely assembled for simple snap-in installation.
- 5 year warranty.




Ordering Information

EXAMPLE: LD2SE-56W-4K-<277-T5

| Template | Sensor | Wattage | Kelvin | Max Voltage | Lens |
|----------|-----------------------|---------|------------|-------------|------|
| LD2 | SE (Enlighted Sensor) | 48W | 3k or 3.5k | 277V | T2 |
| | None (Standard) | 56W | 4k or 4.5k | 480V | T3 |
| | | 84W | 5k | | T5 |




Photometrics Showing Type-5 Distribution

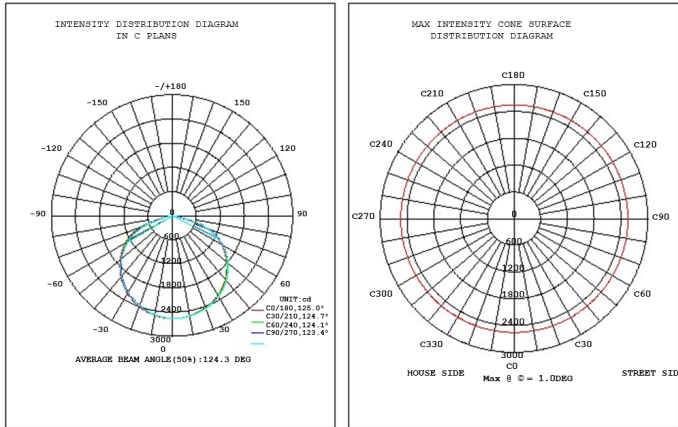

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2014-04-26

θ Range: 0 - 90DEG
θ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.262
Humidity:65.0%
Test Distance:9.970m [K=1.0000]

Photometrics Showing Type-2 Distribution

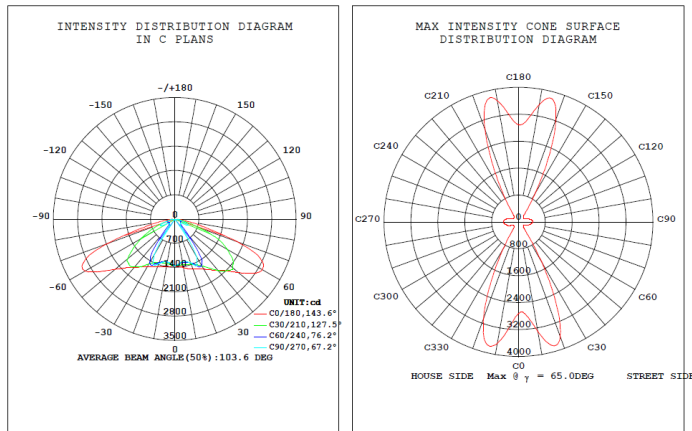

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operator:冯强
Test Date:2012-07-30

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.262
Humidity:65.0%
Test Distance:9.970m [K=1.0000]
Remarks: 56W GLC-LD01