


The Brightest and Toughest T5-6 Lamp Fluorescent Fixture on the Market

Description


- 93.7% Efficiency Miro-4 Super Reflector for T5-6 Lamp.
- Durable .063 Aluminum is Tog-Locked for maximum strength. (No assembly required).
- Fixture is well vented for maximum heat dissipation and longer electrical component life.
- Knockouts for end wiring and occupancy sensors. Optional Gripper hanging system.
- Wire guard or Acrylic lens will take the hit from balls and hockey pucks.
- Life time warranty on fixture housing.
- Size 4" High x 18 5/8" Wide x 48 1/2" Long x .063 Aluminum or 22 Gage Galvanized Steel.

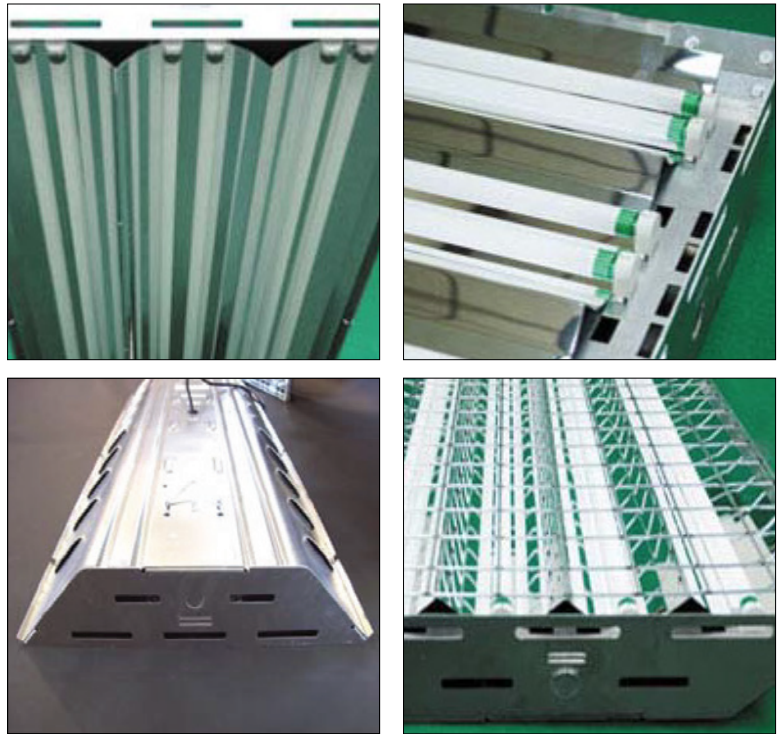

BL-T5-6L Ordering Information: (Example: BL-T5-6L/277/A/W6/L7/15P/ACL/LI/GHK6)

Lamp	Specify Voltage	Specify Fixture	Whip & Plug		Options		
4 4L	120 to 480	Steel	ST	6'	W6	Lamp Included	LI
6 6L		Aluminum	AL	9'	W9	Wire Guard	WG
8 8L				12'	W12	Acrylic Lens	ACL
				20'	W20	Pendent Mount Bracket	PM
				15 Amp 125V	L5-15P	Gripper Hanging Kit	GHK
				15 Amp 277V	L7-15P		6'
				20 Amp 480V	L8-20P		8'
							10'
							12'

T5-6 Lamp IES File

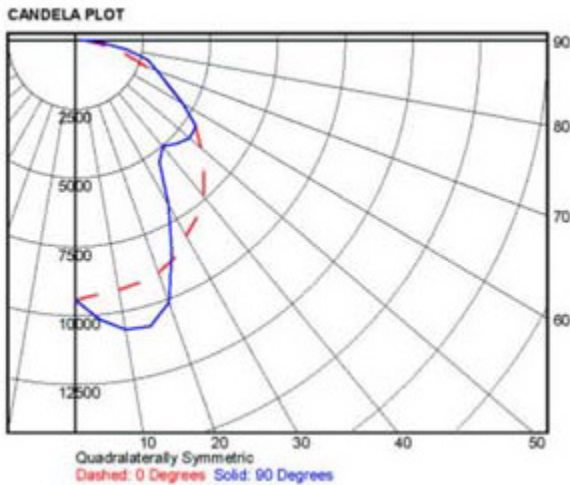

SUMMARY DATA

EFFICIENCY (Total): 93.7 %
 EFFICIENCY (Downlight): 93.7 %
 EFFICIENCY (Uplight): 0.0 %
 CIE CLASSIFICATION: DIRECT
 SPACING CRITERION (0-Deg.): 1.30
 SPACING CRITERION (90-Deg.): 1.12
 LUMENS/LAMP: 5000
 NO. OF LAMPS: 6
 LUMINOUS OPENING: RECTANGULAR
 Width: 1.55 (Feet)
 Length: 4.05
 Height: 0.00
 INPUT WATTS: 354
 RP-1-63 VDT CONFORMANCE: NON-CONFORMIN

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0 - 30	8059.8	26.9	28.7
0 - 40	12546.3	41.8	44.6
0 - 60	21245.7	70.8	75.6
60 - 90	6855.3	22.9	24.4
0 - 90	28101.0	93.7	100.0
90 - 180	0.0	0.0	0.0
0 - 180	28101.0	93.7	100.0



PATENTED

www.bestlights.com



Fixture Warranty

Best Lights, Inc. warranty fixtures to be free from defects in material and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts. Light bulbs and ballast on separate warranty.