



FACTORY LEDS

High Bay Commercial



- ◆ IP65 Protection Rating
- ◆ CRI Ra80
- ◆ Tempered Glass
- ◆ Meanwell Driver
- ◆ CCT 4000K, 5000K
- ◆ 100-277 VAC,
Optional 277- 480 VAC
- ◆ -30 to +50 C
Operating Temperature
- ◆ 5 years warranty



Part Number	FLD-HBC-16KLM120	FLD-HBC-21KLM150	FLD-HBC-28KLM200	FLD-HBC-32KLM240	FLD-HBC-40KLM300
Lumen Output	16,000 LM	21,000 LM	28,000 LM	32,400 LM	40,500 LM
Wattage	120W	150W	200W	240W	300W
Efficacy	140 LM/W			150 LM/W	
Size	45 x 27 x 46 CM				
Weight	17.4 lbs (7.9Kg)				
Beam Angle	50° , 90° , 120° (90° Standard)			30° ,60° , 90° (90° Standard)	
HID Equivalent	250W	400W	400-600W	700W	1000W
Certification	cULus, DLC , CE RoHS				

Ordering Info	Part Number	CCT	Angle	Mounting	Options
Default	FLD-HBC-XXXXXXX	5000K	90 °	Eye Hook	Occupancy Control
EG. FLD-HBC-21KLM150-5000K-90-Eye-1-10V Dim		4000K	120 °	U Bracket	1-10V Dimming
			30 °	Pendant	Zigbee Control
			50 °		Photo Sensor
			60 °		DALI

Factory LED Lights Inc.

Head Office: 276 Sunset Point, Cochrane AB T4C0K9
 www.factoryleds.com vic@factoryleds.com

(587)-333-1832 Canada
 (214)-396-2232 USA





FACTORY LEDS



FACTORY LEDS

High Bay Commercial

Standard
Eye Hook
Mounting

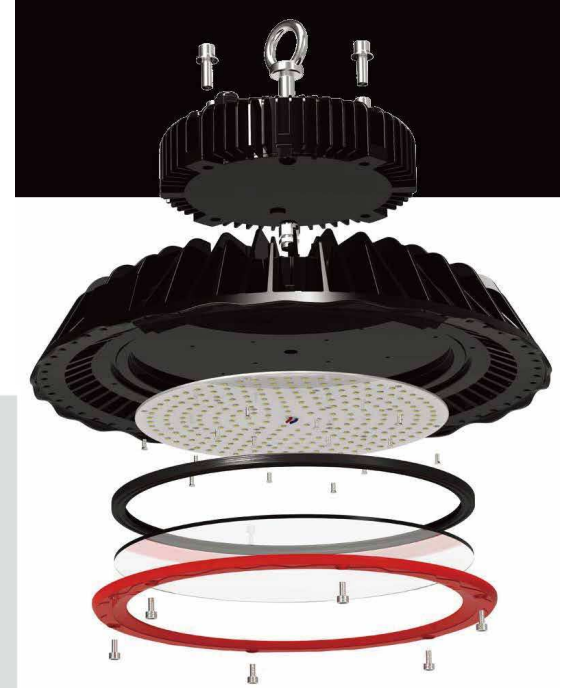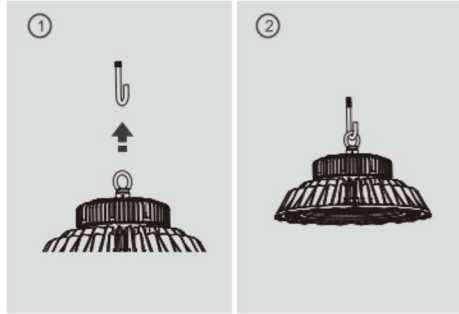

Optional - U Bracket or Pendant Mounting



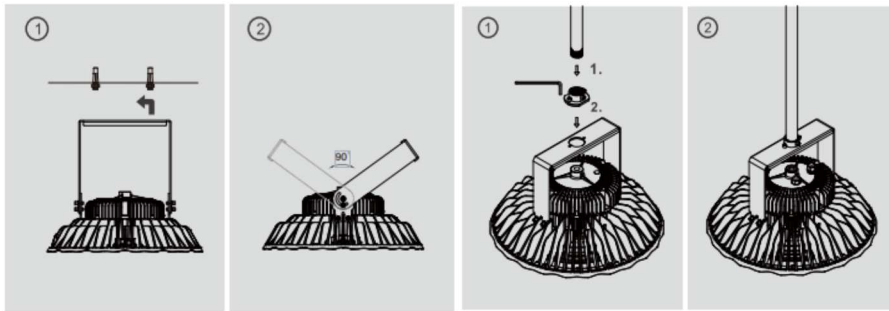


Photo Metric for 150 to 200W


No Lens



90 Deg



120 Deg



50 Deg






Photo Metric for 240W and 300W


90 Deg




60 Deg



30 Deg



Superior Heat Distribution

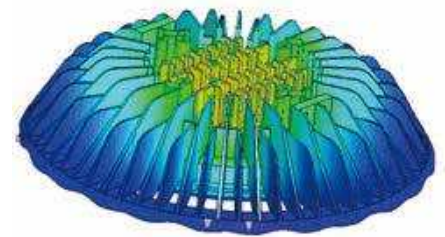

Factory LED Lights Inc.

Head Office: 276 Sunset Point, Cochrane AB T4C0K9
Warehouse: Bay 7 -7519 30th St SE, Calgary AB T2C1V4

(587)-333-1832 Canada

(214)-396-2232 USA

www.factoryleds.com
vic@factoryleds.com



FACTORY LEDS