
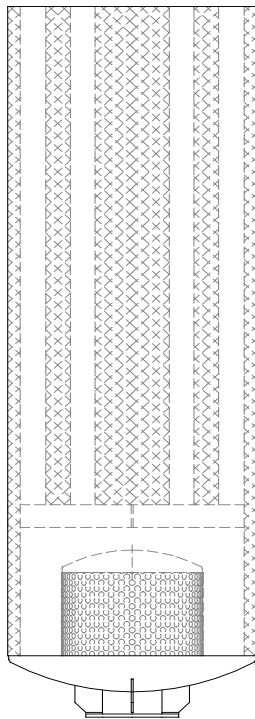


VANEC

Model 561 Vent & Blowdown Silencer




Standard Features:

- ✓ All Steel Welded Construction
- ✓ Quality Fabrication Techniques
- ✓ Condensate Drain
- ✓ Fiberglass Absorptive Pack
- ✓ Plate Flanges to Match ASA 125# Flanges
- ✓ Prime Coated Exterior Surfaces

Optional Features:

- ✓ Materials as Specified
- ✓ Finish as Specified
- ✓ Mounting Brackets or Support
- ✓ Threaded Connections Available
- ✓ Companion Flanges
- ✓ Flange Drilling as Specified

Typical Performance

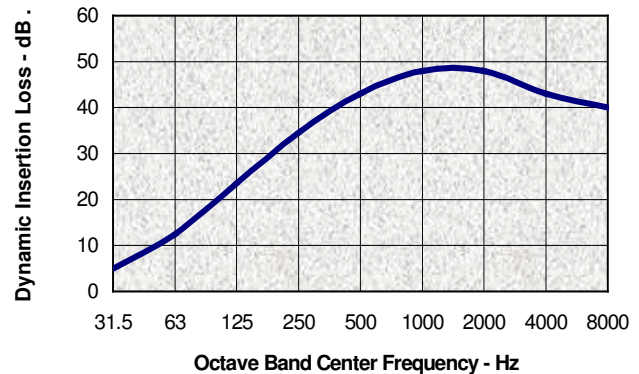


Application:

The **VANEC** Model 561 Vent and Blowdown Silencer is designed for use in suppressing the noise associated with venting high-pressure gas or steam to atmospheric pressure.

The Model 561 Vent & Blowdown Silencer, when properly applied, will reduce the gas discharge noise to a community acceptable level for dwellings located further than 1600 ft. from the vent or blowdown. Silencer performance will depend upon actual operating conditions.

The **VANEC** Model 561 Vent and Blowdown Silencer is usually mounted vertically, but could also be mounted horizontally.

Issue: 10/2002

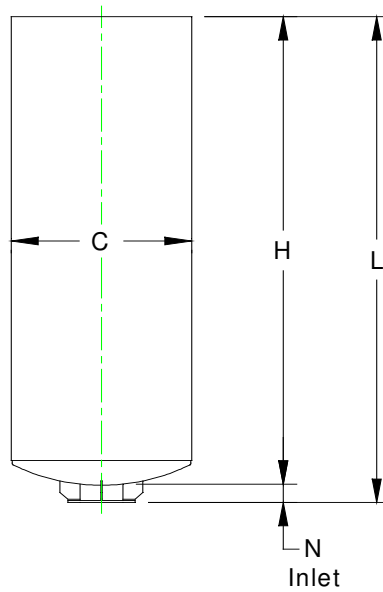

VANEC Model 561

Size	Dimensions in Inches				Est.Wt. Lbs.
	C	H	L	N	
561-12	22	75	79	4	610
561-14	24	82	86	4	710
561-16	28	83	87	4	1,020
561-18	30	95	99	4	1,220
561-20	32	102	106	4	1,380
561-24	36	114	118	4	1,880
561-26	42	121	125	4	2,420
561-28	48	122	126	4	2,720
561-32	54	129	133	4	3,540
561-42	60	142	146	4	5,100
561-44	66	143	147	4	5,900
561-48	72	144	148	4	6,900
561-50	78	151	155	4	7,900
561-58	84	157	161	4	9,070
561-62	90	158	162	4	10,350
561-66	96	171	175	4	12,800
561-68	102	178	182	4	13,900
561-76	108	185	189	4	17,200
561-78	114	192	196	4	18,500
561-82	120	204	208	4	21,300
561-86	126	211	215	4	23,200
561-92	132	224	228	4	26,000
561-96	138	230	234	4	28,500
561-100	144	237	241	4	30,500

VANEC Industrial Silencers
716-827-4959