

Specifications

Frequency range: DC-4 GHz

Nominal Impedance: 50 Ohm


VSWR: 1 .20:1 max. @ 4 GHz

Oper. Temperature range ; -65C- +125C

RoHS Compliant



5/8-24UNEF-2A

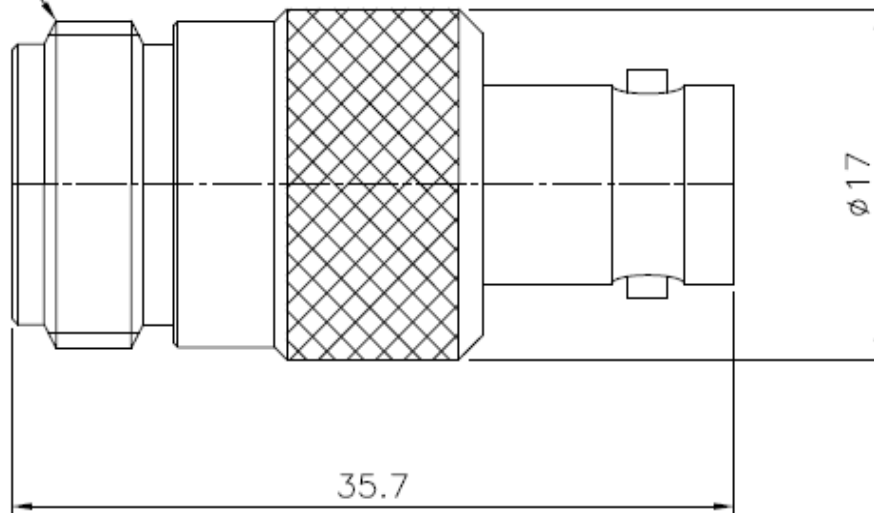

Adapter Part

Material

Plating

Body	Brass	Nickel
Center contact	Beryllium Copper	Gold
Insulator	PTFE	N/A



Premier RF
17 Roslyn CT
Patchogue, NY 11772
PH: 631-447-3804
sales@premier rf.com
www.premier rf.com

Dimensions in mm	PART NUMBER	PRF-AD2F3F
03/10/2012	DESCRIPTION	N FEMALE TO BNC FEMALE ADAPTER, DC-4 GHz
APPROVED		
C. Smith		