


SPECIFICATIONS:

Impedance: 50 Ohm
 Frequency: DC-11 GHz
 VSWR: 1.25:1 MAX
 Operating temp. : -55C- +155C

Part	Material	Plating
BODY	BRASS	NICKEL
COUPLING CAP	BRASS	NICKEL
CENTER CONTACT	BRASS	GOLD
INSULATOR	PTFE	N/A
GASKET	SILICON	N/A

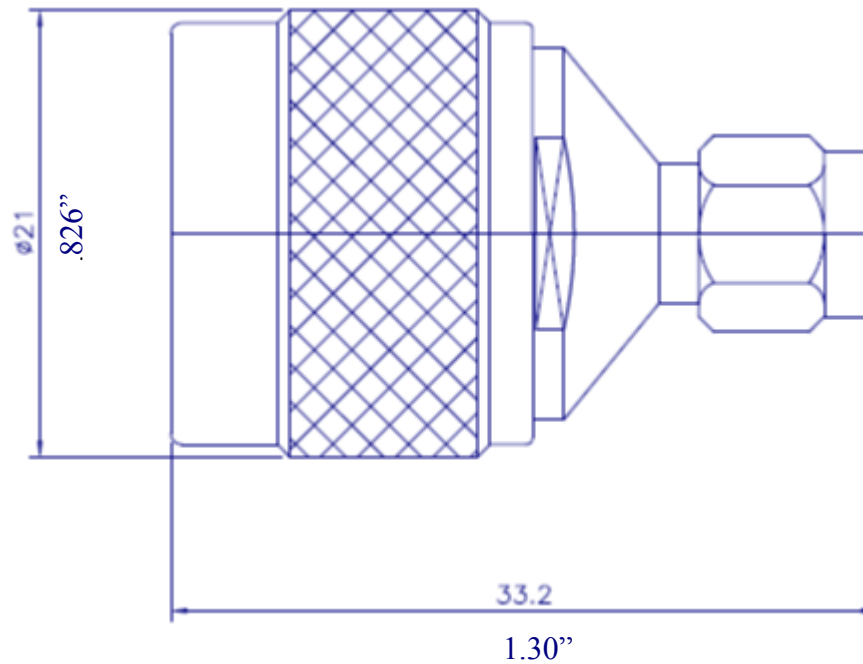

Dimensions are for reference only, and are subject to change with-

PRF
Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

03/10/2012
 APPROVED
 C. Smith

PART NUMBER	PRF-AD1M2M
DESCRIPTION	SMA MALE TO N MALE ADAPTER