

H-FFFT-5 Fixtures/Fittings/Faucets Trainer

Purpose


The **Hampden H-FFFT-5** Fixtures/ Fittings/ Faucets Trainer demonstrates the setup and use of a several lavatory, kitchen, and specialty faucets.

Components

- 3' X 8' X 3' 6" aluminum rolling stand (verify dimensions to fit faucet placement)
- Full length trough on all four sides
- Each faucet with hot and cold supply
- 20 faucets – 8 on each long side – 2 on each short side
- 2" drain for hook up
- 2ea – 3/4" water connection for hook up
- 4 heavy duty wheels all 4 rotating, two locking

Lavatory faucets

- Single handle
 - o Delta 534LF-PP Single Handle Lavatory Faucet
 - o Delta B501LF Single Handle Bathroom Faucet
 - o Delta 520-MPU-DST Single Handle Lavatory Faucet
 - o Delta 581LF-PP Single Handle Bathroom Faucet
- Double handle
 - o Delta 2507LF-HDF Two Handle Pop-Up Lavatory Faucet (2)
 - o Delta B2510LF Two Handle Bathroom Faucet
 - o Chicago Faucets 797-ABCP Lavatory Faucet

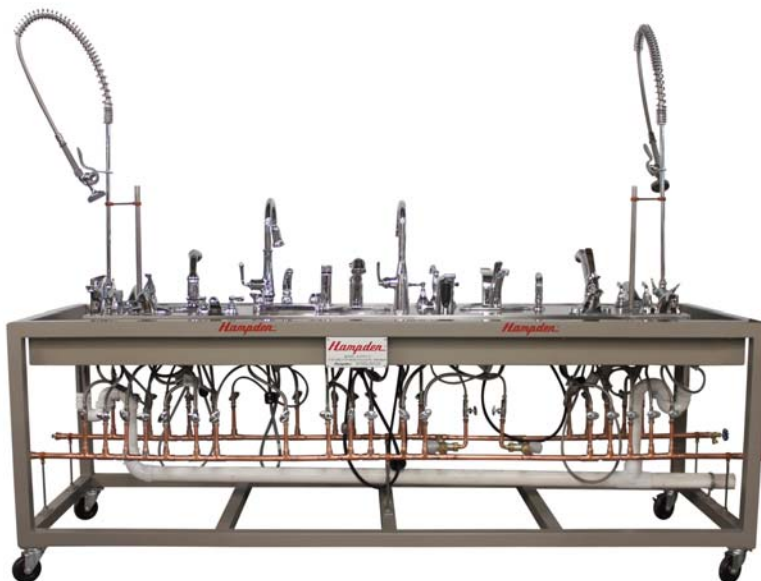

Hampden Model H-FFFT-5

Kitchen faucets

- Single handle Pullout spout
 - o Delta 9176-PR-DST Single Handle Pull Down Kitchen Faucet
 - o American Standard 4279300.002 Single Handle Pull Down Kitchen Faucet
 - o Delta B4310LF Single Handle Three Hole Pull Out Kitchen Faucet
 - o Kingston Brass KB3891BL Kitchen Faucet
 - o Proflo PFXC3111CP Single Handle Kitchen Faucet with Side Sprayer
 - o Delta B4310LF Single Handle Single Hole Pull Out Kitchen Faucet

• Double handle

- o Delta 2597LF-MPU Two Handle Pull Out Kitchen Faucet
- o Chicago Faucets 1100-ABCP Kitchen Sink Faucet

Specialty faucets – 2ea

- Pre-rinse spray valve
 - o T&S Brass B-0113 Pre-rinse Spray
 - o Kohler 13461-CP Sculpted Insight Faucet (Electronic, No Touch)

All Hampden units are available for operation at any voltage or frequency



Hampden
ENGINEERING CORPORATION