

www.MetalRoofingWholesalers.com Estimating Sheet - DECRA Shake XD° - Direct to Deck


Project Name: Total **Description Profile** Color **Calculations** Squares x 23.4 = Panels (10-15% Waste Factor) **DECRA Shake XD®** 23.4 panels per square 12-3/8" exposure - min pitch 3:12 **Ventilation Calculator** DECRA Shake XD® Panel Vent available at www.decra.com Linear Feet x 12 ÷ 12.5 = Pieces Needed (B) Shake Hip & Ridge As needed for hip and ridge 12-5/8" exposure As needed for closure at hip & ridge Shake End Cap Linear Feet Ridge ÷ 20 = Packages Needed **DECRA Ridge Vent** Ventilation Calculator (2) 20' rolls / package available at www.decra.com (2) 2-1/2" W x 1" H x 20' L Linear Feet of Eave ÷ 6.4 = Pieces Needed (Allow for 1" Overlap) (C) Starter Clip w/ Drip Edge n/a 6'6" Length Use with standard drip edge & allow for 1" overlap if using as alternative starter. Linear Feet of Eave ÷ 6.4 = Pieces Needed (D) **Short Course Clip** n/a 6'6" Length Linear Feet Rake/Gable ÷ 6 = Pieces Needed (E) Shake XD® Rake/Gable Channel (Includes 6" Overlap) For use along rakes/gables (Use standard drip edge as needed under channel) 6'6" Length Linear Feet ÷ 6 = Pieces Needed (x1) for sidewalls, including skylights and chimneys (F) XD® Channel (x2) for hips (Includes 6" overlap) For use at roof to side walls, n/a along hips (both sides) (x2) 6'6" Length Linear Feet Rake/Gable ÷ 50 = Rolls Needed Linear Feet Hips/Valleys ÷ 50 (2) = Rolls Needed (G) **DECRA High-Profile Debris Guard** For use along rakes/gables, hips & valleys as needed n/a (2) 1-1/2" W x 1" H x 50' L Linear Feet of Valley ÷ 6 = Pieces Needed (H) (Includes 6" Overlap) XD® Valley & Cap **Sold separately** Cap (stonecoated) 6'6" Length Shingle/XD[®] Underpan 24-3/4" x 30" 1 per Roof Penetration n/a (Use with Non-Lead Pipe Jacks) Linear Feet ÷ 6 = Pieces Needed (Includes 6" Overlap) Side Flashing For use to counter flash side wall 6'6" Length Flat Sheet 16" x 54" 1 Box (2,000 pcs) per 15 Squares 2,000 / box **Corrosion Resistant Screws** Use fasteners of sufficient length to penetrate n/a #9 Hex (1/4" diameter) x 1-1/2" long through the sheathing (deck) by at least 1/2" As needed for Hip & Ridge attachment **Color Coordinated Corrosion** 500 pc / bag **Resistant Screws** 4 bags / box #9 Hex (1/4" diameter) x 1-1/2" long 1x2 and or 2x2 Timber Battens Stacked 2x2s / 1x2s at hips and ridges as needed n/a (Non-Treated)

Touch-Up Kit or **5 lb. Bag of Chip** Use at penetrations, transitions & panels

Bag of stone chip & bottle of acrylic base coat or 5 lb. Bag of Chip



- (A) Shake XD® Field Panels (10-15% waste) 23.4 panels per square
- (B) Shake Hip & Ridge (along hip and ridge) Shake Hip & Ridge Pieces 12-5/8" exposure
- (C) Starter Clip with Drip Edge (along eave for starter) 6'6" Lengths
- (D) Short Course Clip (short course or as alternative to Starter Clip along eave) 6'6" Lengths
- (E) Shake XD® Rake/Gable Channel (along rake/gable) 6'6" Lengths
- (F) XD® Channel (roof-to-wall and along both sides of the hip) 6'6" Lengths
- (G) XD® Valley 6'6" Lengths
- (H) Valley Cap 6'6" Lengths
- (I) Shingle/XD[®] Underpan 24-1/4" x 30"

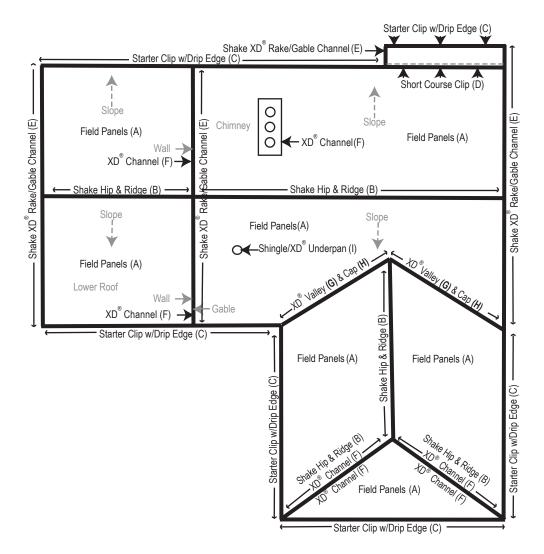

- ✓ Tin Snips
- Circular Saw
- ✓ Roofing Grade Sealant/Adhesive
- ✓ Tape Measure
- Screw Gun
- ✓ Hand Seamer
- ✓ Table Saw
- Spray Paint
- Galvanized Pipe Jacks (No Lead)

- ✓ Follow Local Code
- ✓ Use 2 x 2s and 1 x 2s as needed to secure Hip & Ridge Pieces along hips and ridges. (Should equal the same linear footage as total Hip & Ridge Pieces; each Hip & Ridge Piece equals 12-5/8")
- One layer of Underlayment is required.

Metal Roofing Wholesalers LLC Toll Free 1-877-646-6382 For Installation Questions Call DECRA Roofing Systems at 800-258-9740