

SPECIFICATIONS:


Impedance: SMA Male 50 Ohm
 : BNC Female 75Ohm

Frequency: DC-3 GHz

VSWR: 1.35:1 Max @ 3 GHz

Input Power: 1 Watt Average

Part	Material	Plating
SMA Connector	Brass	Nickel
BNC Connector	Brass	Nickel
Center Contacts	Beryllium Copper	Gold

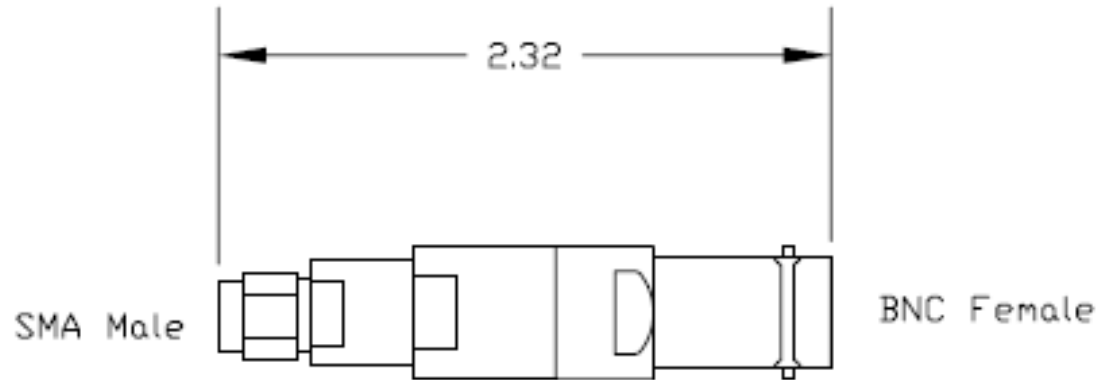

Dimensions are in inches,
 for reference only, and are
 subject to change
 without notice.



Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

	PART NUMBER	PRF-IM1M3F
8/23/2013	DESCRIPTION	50 Ohm SMA MALE to 75 Ohm BNC FEMALE Impedance Matching Pad
APPROVED		
A. Ianacci		