

SPECIFICATIONS:

Impedance: SMA Female Side :50 Ohm
 F Male Side : 75 Ohm

Frequency: DC– 3 GHz


VSWR: 1.30:1 Max

Insertion Loss: 5.7 dB Nominal

Power: 1 Watt Avg.

RoHS Compliant

Part	Material	Plating
Body	Stainless Steel	Passivated
Center Contact	Beryllium Copper	Gold
Insulator	PTFE	——

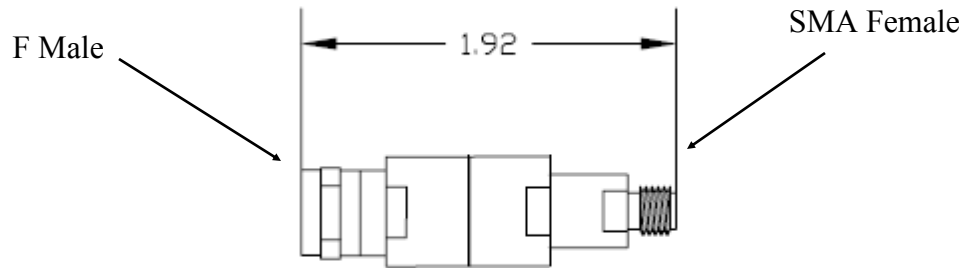

Dimensions are in inches, for reference only, and are subject to change without notice.

PRF
Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premierRF.com
 www.premierRF.com

8/23/2013
APPROVED
A. Ianacci

PART NUMBER	PRF-IM1F15M
DESCRIPTION	50 OHM SMA FEMALE 75 OHM F MALE IMPEDANCE MATCHING PAD