


Sustainable Coils LLC

Replacement Coil Solutions!

HORIZONTAL SLAB COILS

Revision Date: 09/01/2022

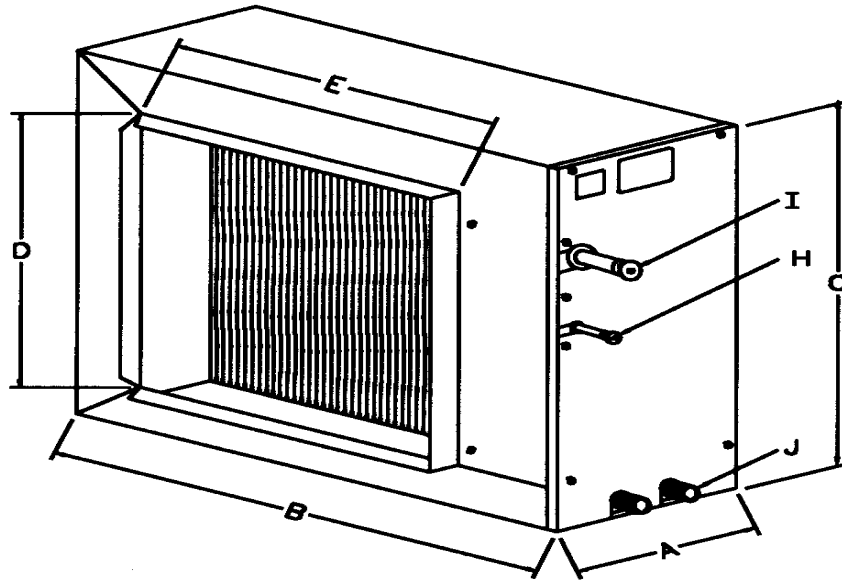

COIL MODEL	COIL WEIGHT	A	B	C	D	E	H	I	J
HS-24	39	10	20	25	21	14	3/8	3/4	3/4
HS-36	45	10	25	25	21	19	3/8	3/4	3/4
HS-48	52	10	30	25	21	24	3/8	7/8	3/4
HS-60	58	10	34	25	21	28	3/8	7/8	3/4

3/8" O.D., CU-122 60 helical copper tube, .016 back wall

2,500 PSI burst pressure minimum

Aluminum end plates to protect against rust corrosion

Louvered aluminum fins spaced at 14 FPI

Piston metered for R-410A refrigerant, additional R-22 piston optional

R-22 and R-410A expansion valve kits (loose or installed) available upon request

Metal drain pan

Pre-swaged refrigerant connection, shipped with dry nitrogen holding charge

Expanded IRV: HS24=103.17, HS36=140.02, HS48=176.87, HS60=206.35

Five year replacement warranty

Visit our website at www.Sustainablecoils.com for further information regarding our complete product line.

