

SPECIFICATIONS:

Impedance: 50 Ohm
 Frequency: DC-6 GHz

VSWR:


1.25:1 Max @ 6 GHz
 Input Power: 10 Watts Avg. @25°C
 Operating temp. : -55°C – +125°C

Standard dB Values: 1-40dB

Attenuation Accuracy (Max.)

1-10dB : ±0.5dB
 11-20dB : ±0.6dB
 21-40dB: ±0.8dB

Part	Material	Plating
Type N Connectors	Stainless Steel	Passivated
Center Contacts	Beryllium Copper	Gold

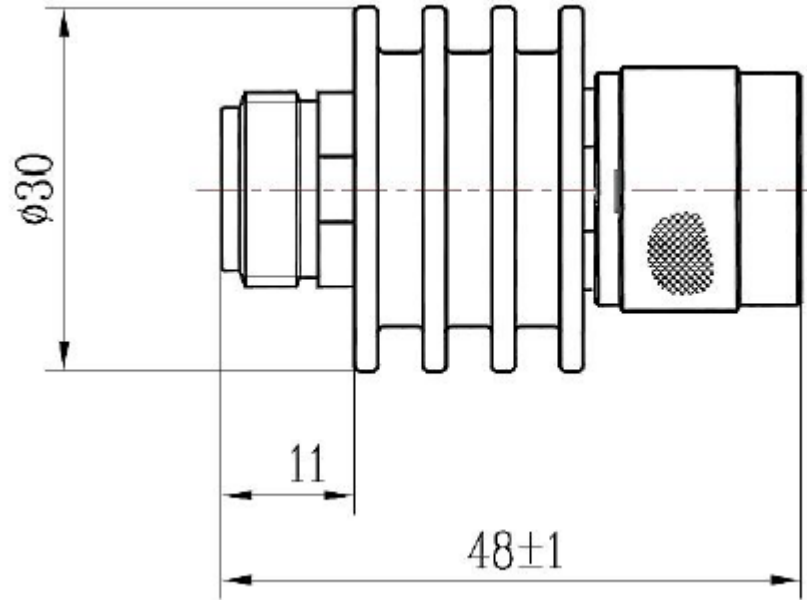

Dimensions are in mm, for reference only, and are subject to change without notice.



Premier RF

17 Roslyn CT
 Patchogue, NY 11772

PH: 631-447-3804

PART NUMBER

PRF-AT2106-XX

DESCRIPTION

**TYPE N ATTENUATOR, M/F
 DC-6 GHz, 10 WATT**

8/23/2013

APPROVED

A. Ianacci