


**Specifications**

Frequency range ; DC-11 GHz  
 Nominal Impedance ; 50 OHm  
 Working voltage; 1 000V rms  
 Proof Voltage ; 2500 Vol ts  
 VSWR; 1 .25:1 max.  
 Oper. Temperature range ; -55-+145"C  
 IP Grade; IP67

**RoHS Compliant**

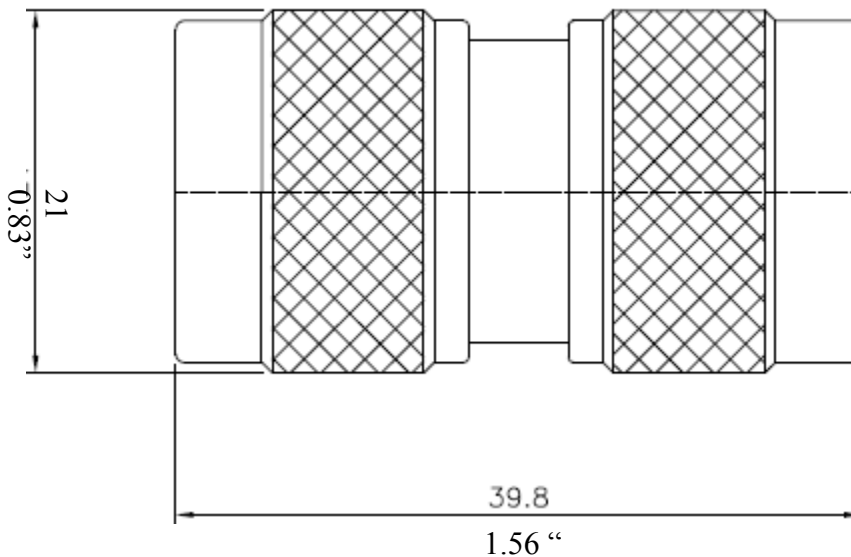

**Adapter Part**

**Material**

**Plating**

Cap, Body	Brass	Nickel
Center contact	Brass	Gold
Insulator	PTFE	N/A



**Premier RF**  
 17 Roslyn CT  
 Patchogue, NY 11772  
 PH: 631-447-3804  
 sales@premierf.com  
 www.premierf.com

	<b>PART NUMBER</b>	<b>PRF-AD2M2M</b>
03/10/2012	<b>DESCRIPTION</b>	<b>N MALE TO N MALE ADAPTER, DC-11 GHz</b>
APPROVED		
C. Smith		