
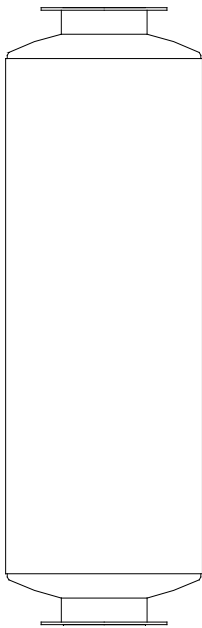


# VANEC

## Model 122 Discharge Silencer



### Standard Features:

- ✓ All Steel Welded Construction
- ✓ Quality Fabrication Techniques
- ✓ Shell Constructed with Integral Damping
- ✓ Polyester Fiber Absorptive Pack
- ✓ Prime Coated Exterior Surfaces
- ✓ Condensate Drain
- ✓ Plate Flanges Drilled to Match ASA 125# Flanges


### Optional Features:


- ✓ Low Side Inlet
- ✓ Materials as Specified
- ✓ Finish as Specified
- ✓ Mounting Brackets or Supports for Vertical or Horizontal Installation
- ✓ Inspection Openings or Man Ways
- ✓ Companion Flanges

### Application:

The **VANEC** Model 122 Exhaust Silencer is designed for use in suppressing the discharge noise from rotary positive blowers. The Model 122 may be used to silence an atmospheric or a pressurized discharge below 15 psig.

Typical Performance

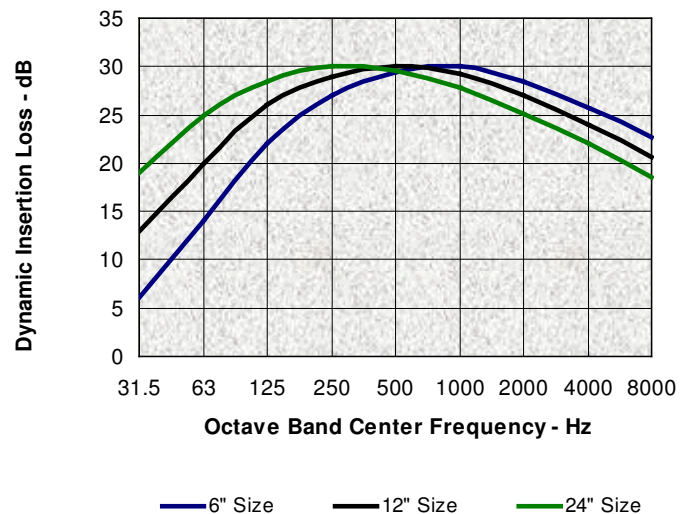

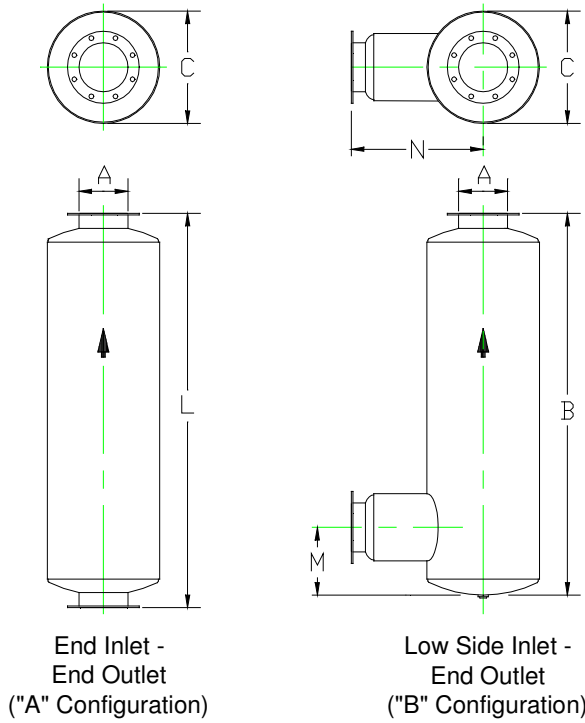

### VANEC Model 122

Model	Dimensions in Inches							Est. Wt. Lbs.
	All Models		"A" Config.	"B" Configuration Low Side Inlet			M	
	A	C		L	B	N		
					Min	Max		
122-04	4	10	45	42	12½	7½	16½	50
122-05	5	12	58	55	15½	9	23	80
122-06	6	14	64	61	17	9	25½	110
122-08	8	18	72	69	21½	12	30½	190
122-10	10	22	85	82	25½	13½	37	380
122-12	12	26	98	95	29½	15	44	550
122-14	14	30	111	108	30	16½	50	800
122-16	16	36	137	134	35½	18½	65	1,250
122-18	18	42	150	147	41	20½	70½	1,600
122-20	20	42	176	172	47	21½	87½	1,900
122-22	22	48	195	191	47	23½	93½	2,700
122-24	24	48	213	109	55½	24½	110	3,000

**VANEC** Industrial Silencers  
716-827-4959