

**SPECIFICATIONS:**

Impedance: 50 Ohm  
 Frequency: DC-6 GHz

**VSWR:**


1.25:1 Max @ 6 GHz  
 Input Power: 25 Watts Avg. @25°C  
 Operating temp. : -55°C – +125°C

Standard dB Values: 1-40dB

**Attenuation Accuracy (Max.)**

1-10dB : ±0.5dB  
 11-20dB : ±0.6dB  
 21-40dB: ±0.8dB

Part	Material	Plating
Type N Connectors	Stainless Steel	Passivated
Center Contacts	Beryllium Copper	Gold

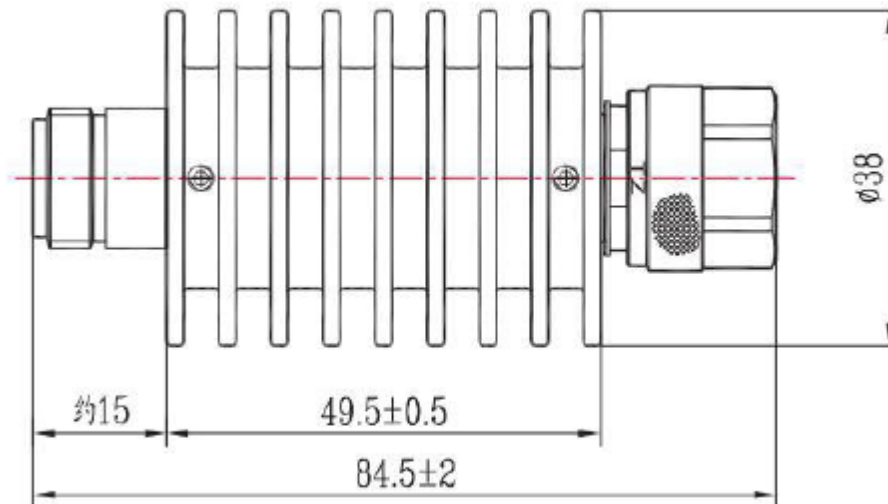

**Premier RF**  
 17 Roslyn CT  
 Patchogue, NY 11772  
 PH: 631-447-3804

Dimensions are in mm, for reference only, and are subject to change without notice.

09/22/2012  
 APPROVED  
 A. Ianacci

<b>PART NUMBER</b>	<b>PRF-AT22506-XX</b>
<b>DESCRIPTION</b>	<b>TYPE N ATTENUATOR, M/F DC-6 GHz, 25 WATT</b>