


SITE PLAN

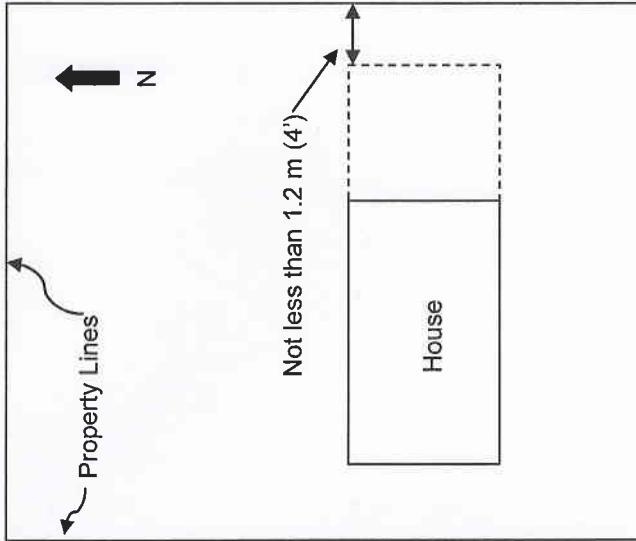

Complete the following:

Size of the garage: ___ x ___ ft²
 Width of the overhead door: ___'
 Size of the overhead door lintel (header): ___ plies x ___

Access door(s) to existing house

- Weather stripped
- Self-closer
- Deadbolt lock
- No openable windows
- (in door or common wall with house)

ROOF

- Asphalt shingles Metal Roofing
- Other: _____
- Roof Sheathing: OSB Plywood
- Other: _____
- Thickness of sheathing: 3/8" 7/16"
- Other: _____
- Roof trusses: Pre-engineered
- Other: _____
- Spacing of trusses: 16" o.c. 24" o.c.
- Other: _____
- Length of truss including overhang: _____'
- Roof overhang: _____"

FOUNDATION

Foundation must be below the level of frost or not less than 1.2 m (4') (if a wall and spread footing is used) or piles must be not less than 10-12' in depth.

Grade Beam

Size of grade beam: ___" (h) x ___" (w)

Piles: diameter ___", depth ___"

Void form provided:

Rebar reinforcing provided:

In grade beam:

In piles:

Foundation wall & spread footing

Foundation wall height: ___"

Wall thickness: ___"


Spread footing: (width) ___" x (thickness) ___"

Rebar reinforcing:

ATTACHED GARAGE WORKSHEET

Permit Name: _____

Civic Address: _____

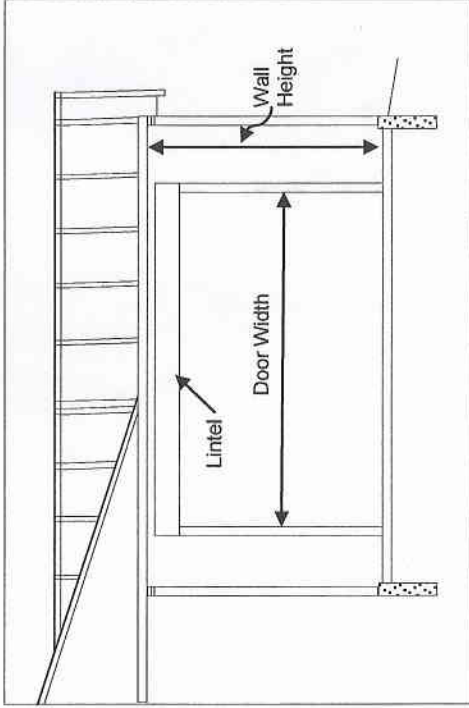

WALLS:

Exterior siding: Vinyl Stucco Hardboard Metal

Other: _____

Air barrier: House wrap Building paper

Wall sheathing: OSB Plywood Other: _____

Thickness of sheathing: 3/8" 1/2" Other: _____

Wall framing: 2 x ___ 16" o.c. 24" o.c.

Height of exterior walls: _____"

Lintel (header) size and number of plies for:

access door: ___ plies x ___,


window: ___ plies x ___,

Wall anchorage: 3/8" 1/2" bolts Other: _____

Spacing of anchors: _____" o.c.



DETACHED GARAGE WORKSHEET

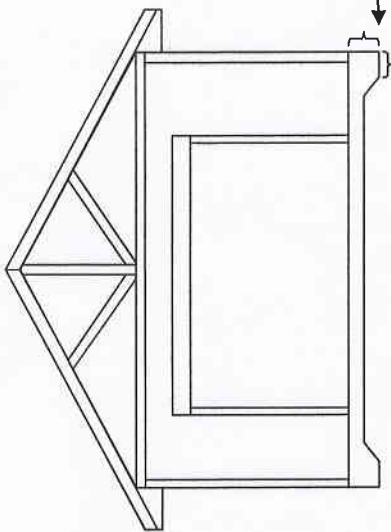

Complete the following:

FOUNDATION TYPE:

Thickened edge slab: Other: _____
 Edge: _____" x _____" Width _____"
 Footing: _____" x _____" Width _____"
 Type of base: _____

Complete the following:

ROOF:
 Roofing: Asphalt shingles Metal Roofing
 Roof Sheathing: OSB Plywood
 Thickness of sheathing: 3/8" 7/16"
 Roof trusses: Pre-engineered
 Spacing of trusses: 16" o.c. 24" o.c.
 Length of truss including overhang: _____"
 Roof overhang: _____"

WALLS:

Exterior siding: Vinyl Stucco Hardboard Metal
 Air barrier: House wrap Building paper
 Wall sheathing: OSB Plywood
 Thickness of sheathing: 3/8" 1/2"
 Wall framing: 2 x _____ @ 16" o.c. 24" o.c.

Height of exterior walls: _____'

Lintel size and number of plies for:


access door: 2 , 3 - 2 x _____,
 windows: 2 , 3 - 2 x _____,
 overhead door: 2 , 3 - 2 x _____, size of overhead door: _____'

Wall anchorage: 3/8" bolts 1/2" bolts

Spacing of bolts: _____" o.c.

Permit Name: _____

Civic Address: _____

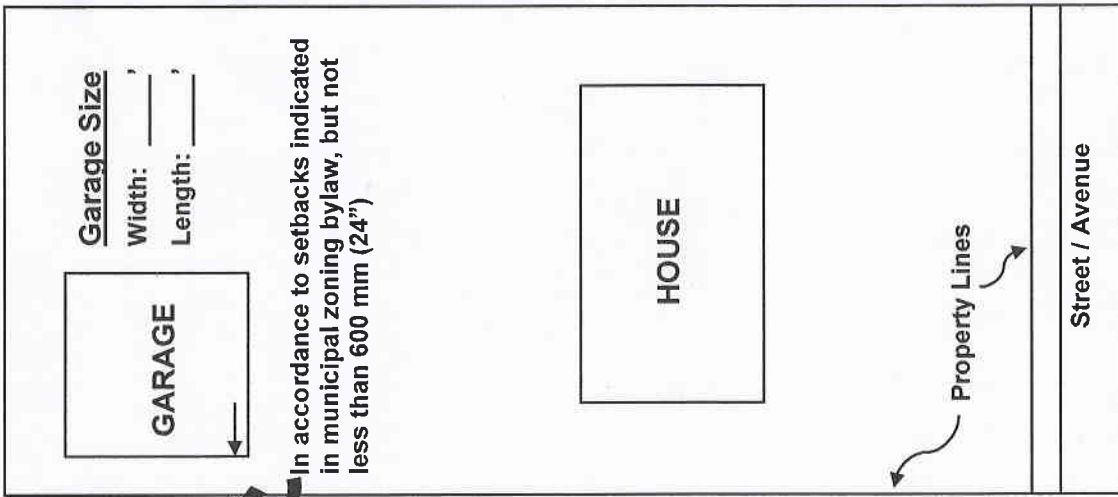

INTERIOR FINISHES INFORMATION

Will the garage have:

- insulation installed Yes No
- vapour barrier installed Yes No
- interior finishes installed Yes No
- any plumbing fixtures Yes No
- be heated Yes No

SITE PLAN:

Indicate the following on the site plan to the right:

- Provide all streets, avenues or lanes on all sides of property.
- Location garage will be in relation to the house and property lines.
- Indicate the distance the garage will be from the side property lines.
- Indicate the distance the garage will be from the rear property lines.
- Indicate the distance the garage will be from the house.

