



**Engineered to perform...**  
**Built to last!**

# i-12PRO

## Heavy Duty Two Post Lifts

12,000 lbs. Capacity

### Features:


- 3-stage front and rear arms
- Hydraulic cylinders in each column:
  - Full stroke
  - Cylinder rod concealed inside carriage
- Extended height configurations available
- Overhead cable equalization
- Single point lock release
- Spring operated arm restraints
- Includes adapter extensions and storage bracket
- Durable powder-coated finish
- Warranty: Five years structural, 18 month parts, and six months labor
- ALI certified



Model Shown:  
FWD i12N300BL  
12,000 lbs. capacity

### Low-Profile Adapter Design:

The i12 features low-profile, oversized pads with multiple extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 1.75", 3.5", 5"

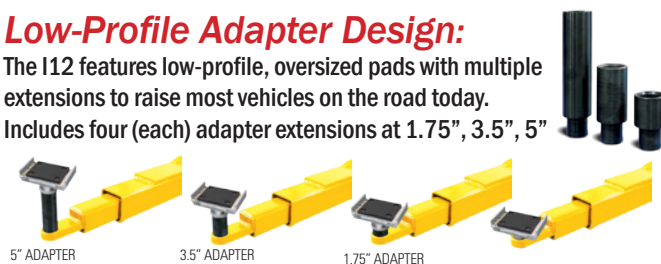

5" ADAPTER

3.5" ADAPTER

1.75" ADAPTER

Specifications	i12PRO
Capacity	12,000 lbs. (5443kg)
Rise	75-3/4" (1924mm)
Maximum Rise	80-3/4" (2051mm) w/ 5" extension
Adjustable Overall Height Options	166" (4216mm) Standard Height (i12N300) 178" (4521mm) Extended Max. Height (i12N301) 154" (3912mm) (i12N302) 143" (3632mm) (i12N303)
Overall Width	140" - 146" (3556 - 3708mm)
Drive Through Clearance	108-3/4" (2762mm) or optional 102-3/4" (2610mm)
Overhead Switch Height Options	160-1/8" (4067mm) Standard 172-1/8" (4524mm) Extended 148-1/8" (3762mm) 137-1/8" (3483mm)
Front Reach (Min./Max.)	27-3/4" min / 59" max (705mm / 1460mm)
Rear Reach (Min./Max.)	27-3/4" min / 59" max (705mm / 1460mm)
Lifting Pad Height (Min./Max.)	4-3/4" (121mm) with no extension 9-3/4" w/ 5" extension (248mm)
Width Between Columns	120-7/8" (3070mm) Adjustable 114-7/8" (2918) Standard
Voltage/Amps	208/230, 15 amps; 208/230, 16 amps
Motor/Phase*	1ph* / 2HP / 50Hz 1ph* / 2HP / 60Hz
Speed of Rise	60 seconds

\*3-phase available at additional cost / Lifts available in blue and red  
Specifications subject to change without notice or liability.