





LP-28 Datasheet

LP-28


LP28 Power/Signal	Product Series		LP-28					
	Pin Number		2PIN		3PIN		8PIN	
	Application Type Section		 Male Female		 Male Female		 Male Female	
	Current Rating		50A		35A/50A		15A	
	Voltage Rating		AC 500V				AC 300V	
	Cable O.D Range		φ 17.0 ~ φ 20.5mm				φ 13~15mm	
	Wire Size		16mm ² /6AWG		10mm ² /8AWG 16mm ² /6AWG		4.0mm ² /12AWG	
	Protection Level		Standard is IP65, IP67&IP68 Option Available					
	Assembly Method		Screwing / Riveting				Soldering	
	Illustration	Material	Part No (Locking wire: LW Riveting: R)					
Plug	Plastic / Metal	Male	LP-28-C02PE-21-001(LW)		LP-28-C03PE-21-001(LW)		LP-28-C08PE-01-001	
			LP-28-C02PE-31-003(R)		LP-28-C03PE-31-003(R)			
		Female	LP-28-J02PE-21-001(LW)		LP-28-J03PE-21-001(R)		LP-28-J08PE-01-001	
			LP-28-J02PE-31-003(R)		LP-28-J03PE-31-003(R)			
In-line receptacle		Male	LP-28-C02PP-21-001(LW)		LP-28-C03PP-21-001(LW)		LP-28-C08PP-01-001	
			LP-28-C02PP-31-003(R)		LP-28-C03PP-31-003(R)			
		Female	LP-28-J02PP-21-001(LW)		LP-28-J03PP-21-001(LW)		LP-28-J08PP-01-001	
			LP-28-J02PP-31-003(R)		LP-28-J03PP-31-003(R)			
Single hole straight receptacle		Male	LP-28-C02SX-23-101(LW)		LP-28-C03SX-23-101(LW)		LP-28-C08SX-03-101	
			LP-28-C02SX-33-103(R)		LP-28-C03SX-33-103(R)			
		Female	LP-28-J02SX-23-101(LW)		LP-28-J03SX-23-101(LW)		LP-28-J08SX-03-101	
			LP-28-J02SX-33-103(R)		LP-28-J03SX-33-103(R)			
Four-hole flange receptacle		Male	LP-28-C02SX-23-401(LW)		LP-28-C03SX-23-401(LW)		LP-28-C08SX-03-401	
			LP-28-C02SX-33-403(R)		LP-28-C03SX-33-403(R)			
		Female	LP-28-J02SX-23-401(LW)		LP-28-J03SX-23-401(LW)		LP-28-J08SX-03-401	
			LP-28-J02SX-33-403(R)		LP-28-J03SX-33-403(R)			

LP-28 Dimension Drawing (unit: mm)


Plug

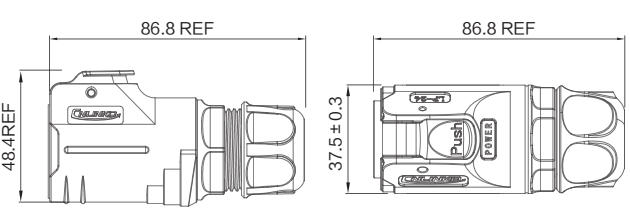

In-line receptacle

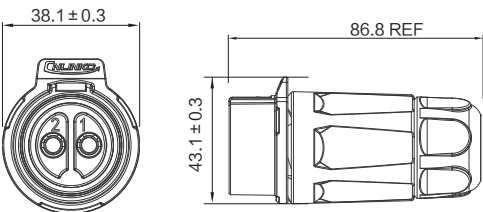

Single hole straight receptacle

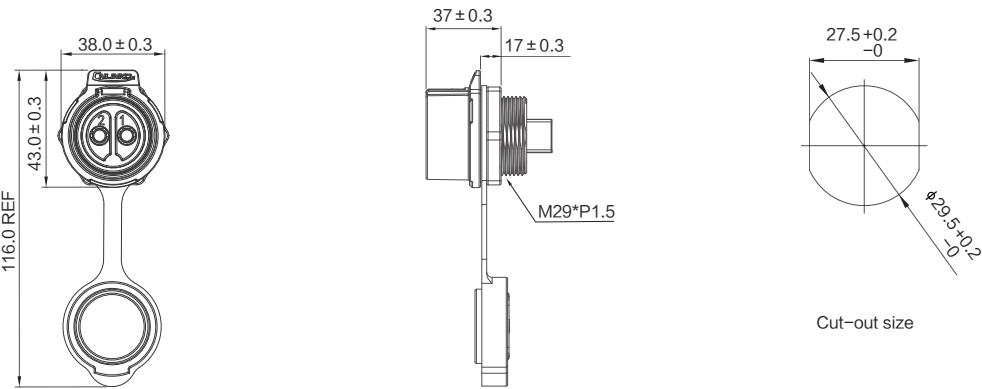

Four-hole flange receptacle

